


C-170359

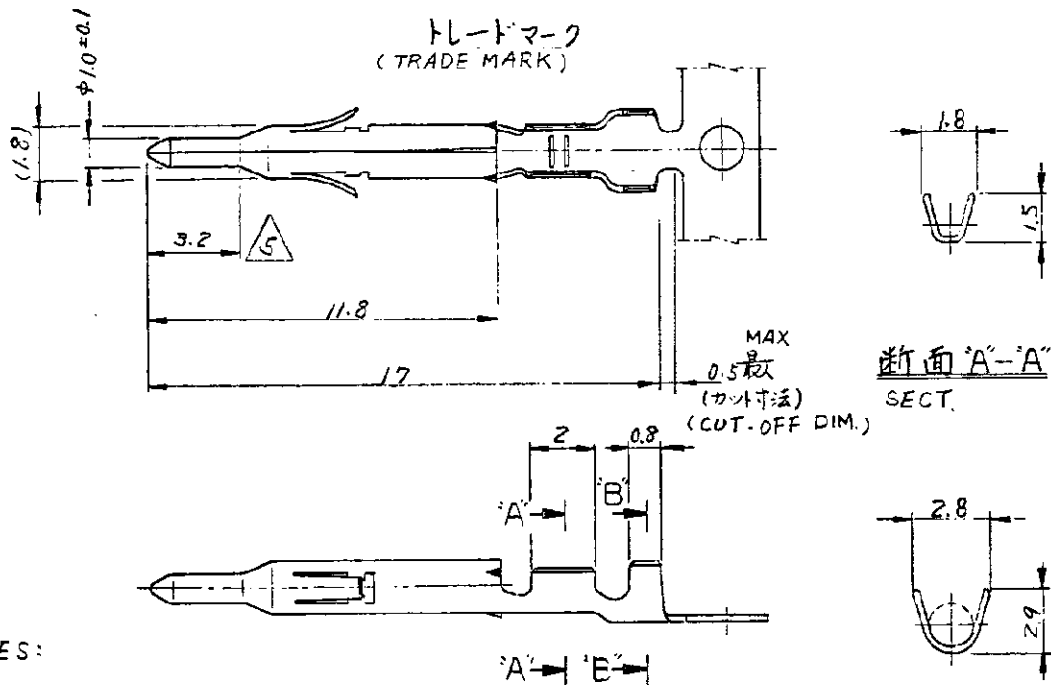

NOTES:

1. THIS CONTACT IS USED ON EITHER PLUG AND CAP HOUSING.
2. APPLICABLE PRODUCT SPEC : 108-5138
3. APPLICABLE APPLICATION SPEC : 114-5050
4. REFER TO IS-105J FOR APPLICATION FOR MOUNTING TO CONNECTORS.

△ 0.00076 mm MIN. THICK GOLD-PLATED IN THE CONTACT SECTION TO 3.2 mm FROM THE TIP END, OVER NICKEL UNDERPLATE ALL OVER.

注:

1. 使用ハウジングはキャップ及びプラグ
2. 適用製品仕様書 : 108-5138
3. 適用圧着仕様書 : 114-5050
4. 取扱説明書 : JS-105J

△ ヒン先端から3.2の間0.76mm最小の金めき 残部はニッケルめっき.

170361, 170362	170363-1	170359-1
170365, 170366	170363-1	170359-1
組合相手側型番	仕上・材料	は517端子型番
(MATING CONN. P/N)	(FINISH / MATERIAL)	(L.P. P/N) (P/N)

金めき付リン青銅 (TIN/PHOS.BRD)

金めき△黄銅 (GOLD/BRASS △)

金めき付黄銅 (TIN/BRASS)

仕上・材料

170363-1

170359-1

は517端子型番

型番

(L.P. P/N)

(P/N)

参考図面
(CUSTOMER COPY
REFERENCE ONLY)

表参照 SEE TABLE 0.2x

表参照 SEE TABLE

WIRE RANGE #

0.12 ~ 0.35 mm AWG26 ~ 22

INSULATION DIA

1.2 ~ 1.75 mm IN

公差 (TOLERANCE) ±0.4 (EXCEPT AS NOTED) ±0.3

SCALE 4:1

LOG J A C-170359

E2

TE

TE Connectivity

NAME MINI UNIVERSAL MATE-N-LOK PIN CONTACT

ニユニバーサルマテロックピンコネクタ

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[170359-1](#)