

50Ω 100 to 1300 MHz

The Big Deal

- Useable to 1500 MHz
- Low mainline loss, 0.4 dB
- High directivity, 22 dB
- High-Power, 4W



CASE STYLE: CD542

Product Overview

Mini-Circuits' ADC-20-132+ is a surface-mount directional coupler providing 20 dB coupling from 100 to 1300 MHz. This model, provides good coupling flatness, low mainline loss, high directivity and RF input power handling up to 4W. The unit comes housed in a miniature 6-lead plastic package (0.27 x 0.31 x 0.11"), saving space in dense PCB layouts.

Key Features

Feature	Advantages
Usable to 1500 MHz	The ADC-20-132+ supports a variety of applications.
Good coupling flatness, ± 1.5 dB	Provides consistent coupling performance across frequency.
High power handling: <ul style="list-style-type: none">• 4W to 700 MHz• 2W to 1300 Mhz	Usable in systems with a wide range of high-power requirements.
Low mainline loss, 0.4 dB	Provides excellent through-path signal power transmission.
High directivity, 22 dB	High directivity allows accurate signal sampling through the coupled port with minimal measurement error.
Small size, 0.27 x 0.31 x 0.11"	Provides high power capability while saving space in systems with tight layouts.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount Directional Coupler

ADC-20-132+

50Ω 100 to 1300 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2
50Ω TERM EXTERNAL	4
ISOLATE (DO NOT USE)	5

Outline Drawing

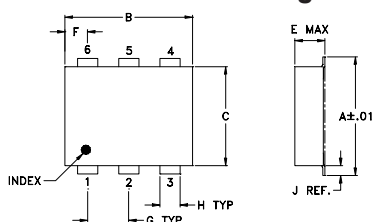

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.20		

Demo Board MCL P/N: TB-05

Suggested PCB Layout (PL-095)

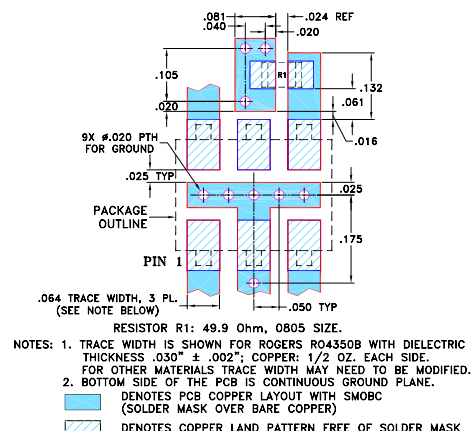

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- useable to 1500 MHz
- low mainline loss, 0.4 dB typ.
- high directivity, 22 dB typ.
- aqueous washable
- protected by U.S. Patents 6,133,525 & 6,140,887

Applications

- cable tv



CASE STYLE: CD542

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost


Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		100	—	1300	MHz
Mainline Loss ¹	100	—	0.3	0.6	dB
	500	—	0.2	0.4	
	1000	—	0.3	0.5	
	1300	—	0.4	0.7	
Coupling	100-1300	—	20	—	dB
Coupling Flatness(±)	100-1000	—	1.0	1.6	dB
	100-1300	—	1.5	2.5	
Directivity	100	20	25	—	dB
	500	18	23	—	
	1000	14	18	—	
	1300	10	15	—	
Return Loss (Input)	200-1000	—	19	—	dB
	100-1300	—	15	—	
Return Loss (Output)	200-1000	—	20	—	dB
	100-1300	—	15	—	
Return Loss (Coupling)	200-1000	—	17	—	dB
	100-1300	—	15	—	
Input Power	200-700	—	—	4	W
	100-1300	—	—	2	

1. Mainline loss includes theoretical power loss at coupled port.

Electrical Schematic

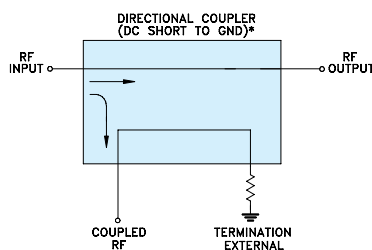

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.






www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M155179
ED-13396/2
ADC-20-132+
CH/CP/AM
160223
Page 2 of 3

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)	Directivity (dB)	Return Loss (dB)		
	In-Out	In-Cpl		In	Out	Cpl
100	0.29	21.48	27.34	14.11	14.11	14.04
150	0.21	21.34	27.88	17.26	17.36	17.00
200	0.19	21.28	27.08	19.43	19.37	18.90
300	0.18	21.15	26.79	22.08	22.17	21.00
400	0.19	20.99	26.11	23.48	23.63	21.92
500	0.20	20.80	25.38	24.27	24.54	22.15
700	0.23	20.34	24.25	24.36	24.59	21.50
900	0.27	19.81	22.20	22.97	23.33	20.31
1100	0.33	19.25	19.78	20.86	21.14	18.82
1300	0.41	18.66	17.52	18.61	18.81	17.21

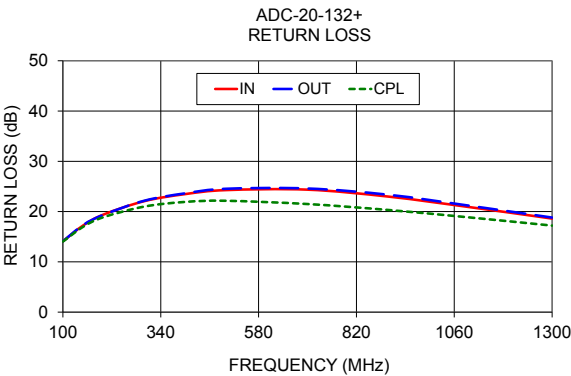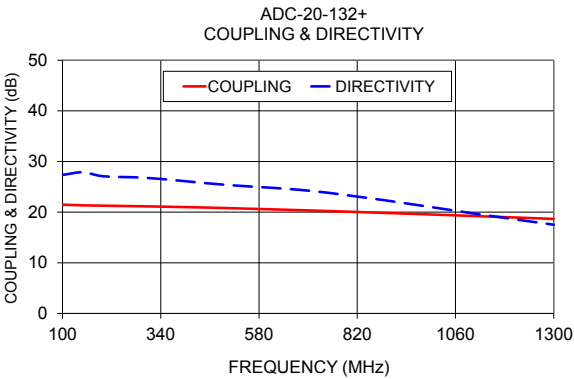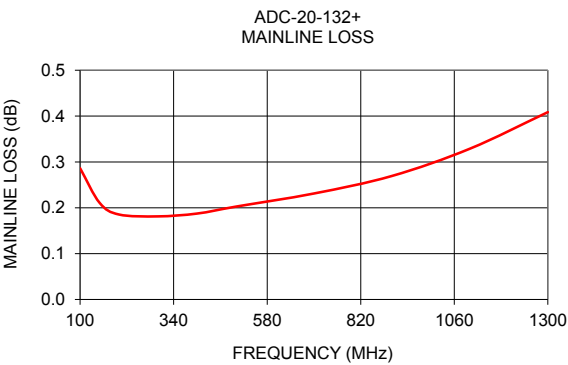

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ADC-20-132+](#)