

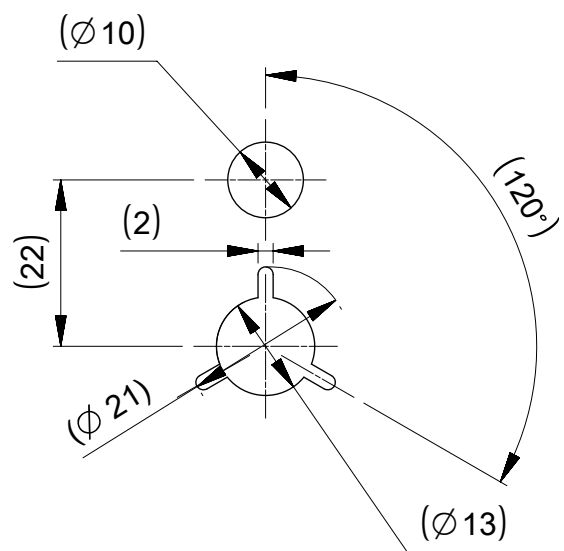


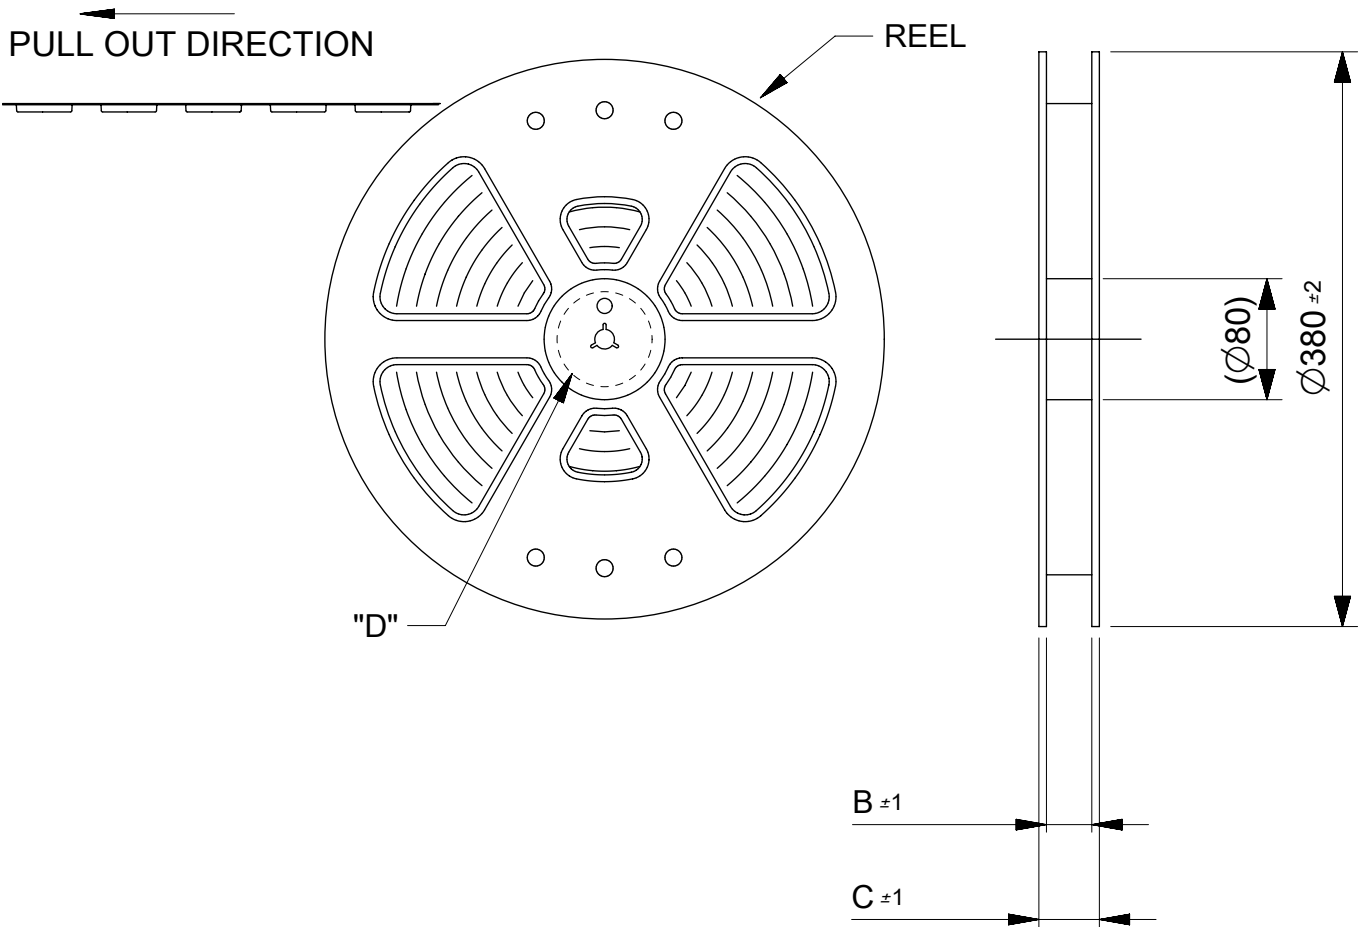

DETAIL "D"

NOTES


1. RE DETAILED DIMENSION, SEE PRODUCT DRAWING.
2. NUMBER OF CONNECTORS : 8000 PCS/REEL.
3. LEAD TAPE LENGTH.

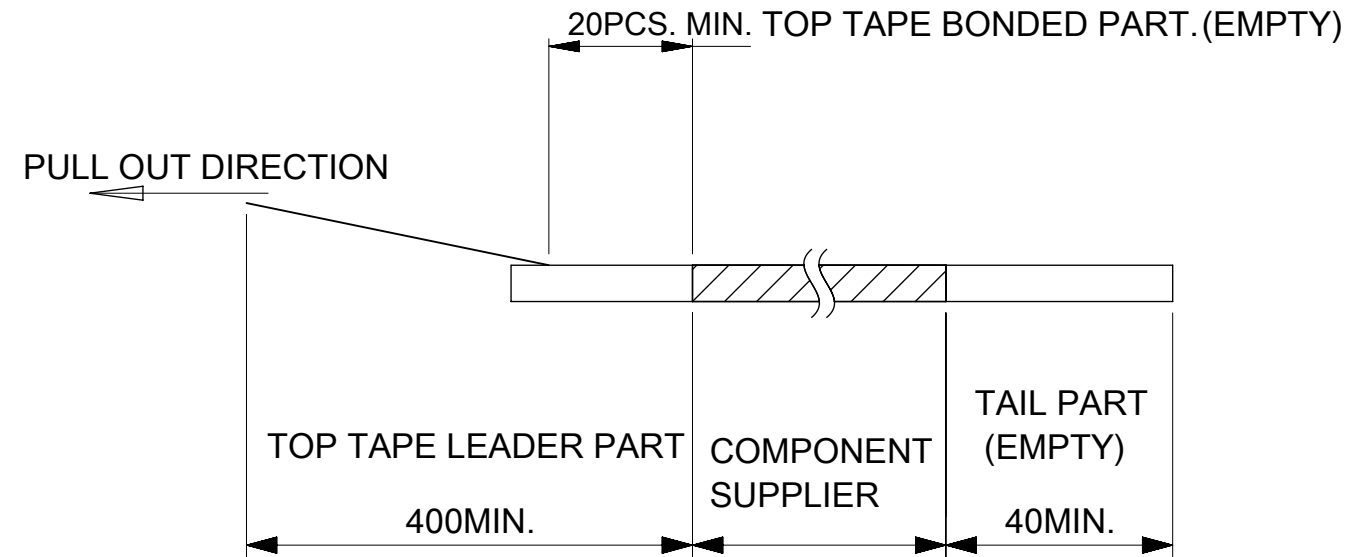


4. TOP TAPE PEEL FORCE IS DEFINED BY IEC60286-3
5. MATERIAL
CARRER TAPE :POLYSTYRENE
TOP TAPE :PET , OTHER
REEL :POLYSTYRENE(PS)(RECYCLE MATERIAL CONTAINED)

$\triangle 6$ ONLY 6 CIRCUIT IS DIFFERENT IN THIS DIMENSION.


MODEL NO. 505070-**42

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
DIMENSION UNITS		SCALE		CURRENT REV DESC: REVISED			molex										
mm		1:5															
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 612826		0.35 BB CONN. H=0.6 SSB6 RP PLUG ASSY											
				DRWN: GSHARMA						2019/02/22							
				CHK'D: MSASAO						2019/02/27							
				ANGULAR TOL ± 1.0°		APPR: MSASAO		2019/02/27		PRODUCT CUSTOMER DRAWING							
				4 PLACES ± 0.01		INITIAL REVISION:				DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
				3 PLACES ± 0.03						5050700000		PSD		008		C	
2 PLACES ± 0.05		2017/03/28															
1 PLACE ± 0.1		DRWN: TNISHIDA02		2017/03/28													
0 PLACES ± 0.2		APPR: TKUSUHARA01		2017/04/03													
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER			
				A3-SIZE		505070				GENERAL		1 OF 3					

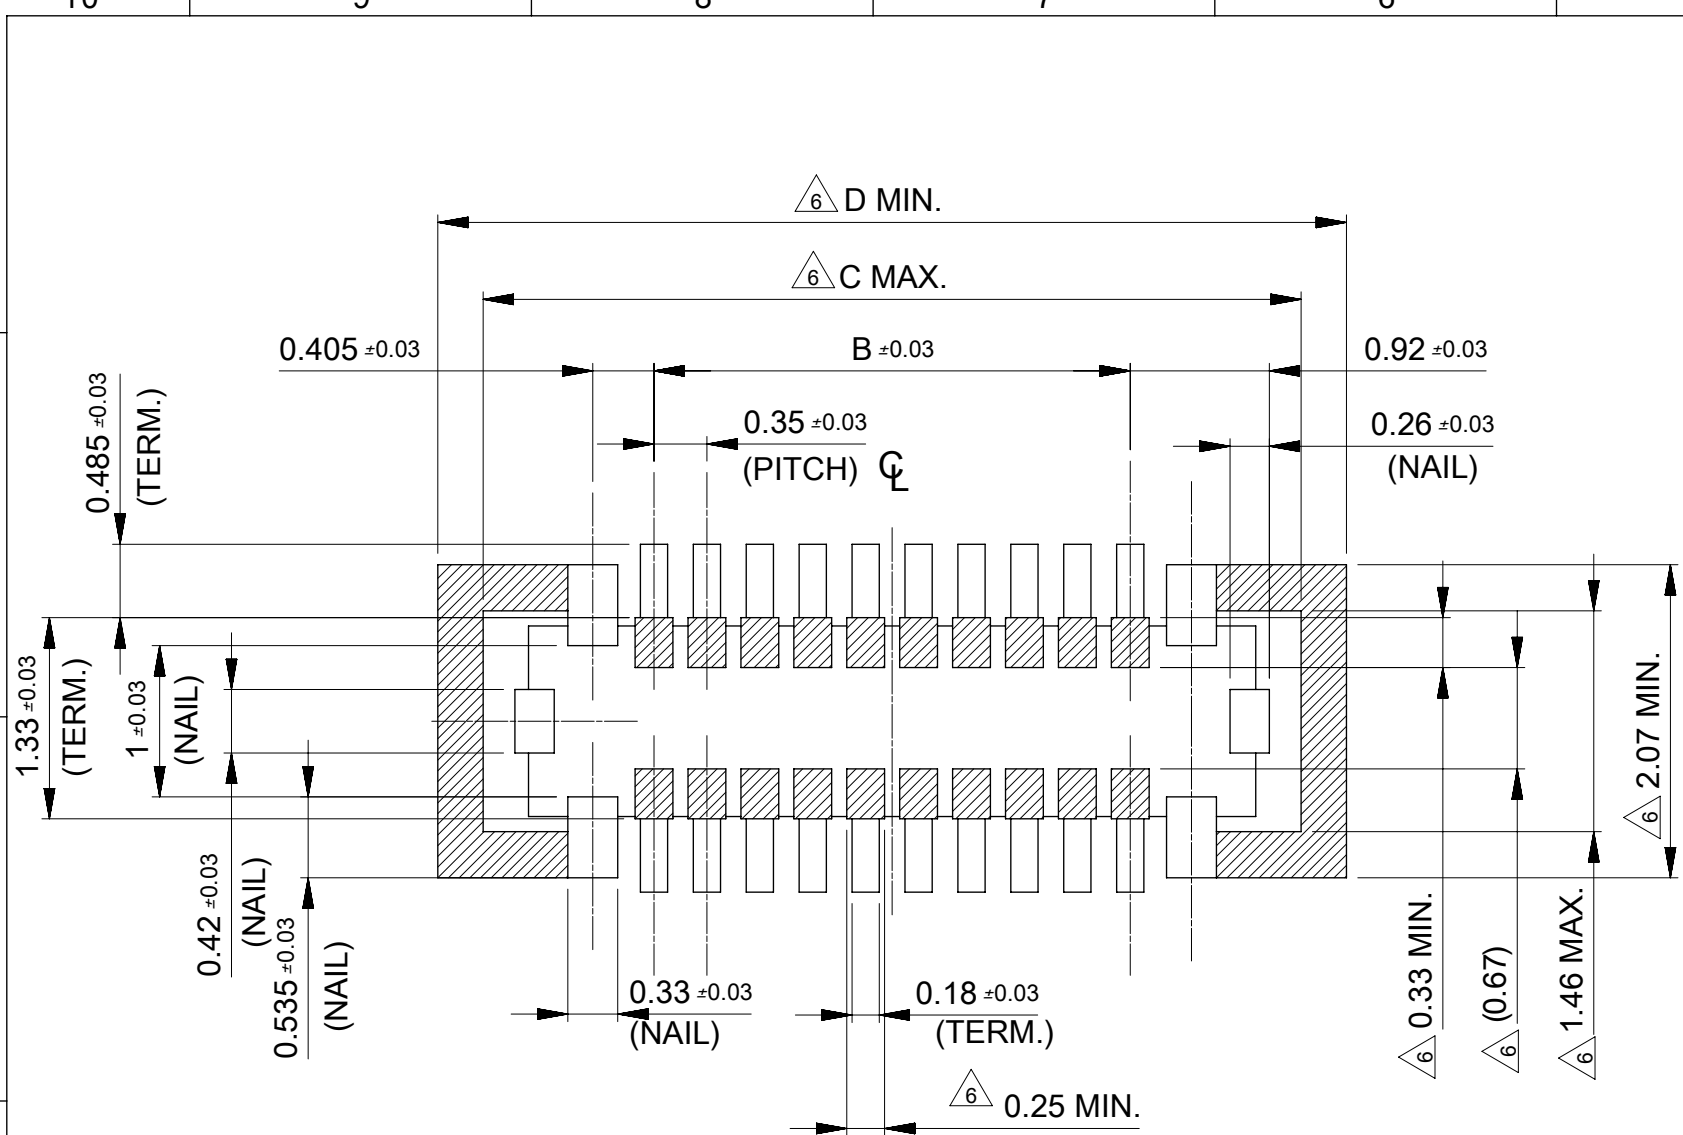


RECOMENDED P.W.BOARD PATTERN LAYOUT(REFFERENCE)

 PROHIBITED AREA OF PATTERN WIRING AND SOLDER.
(FOR EACH AREA, THE WIRING THAT TOUCHES ON THE SOLDER
CAN BE ATTACHED, THEN COVERED WITH A FILM TO KEEP SOLDER OUT.)

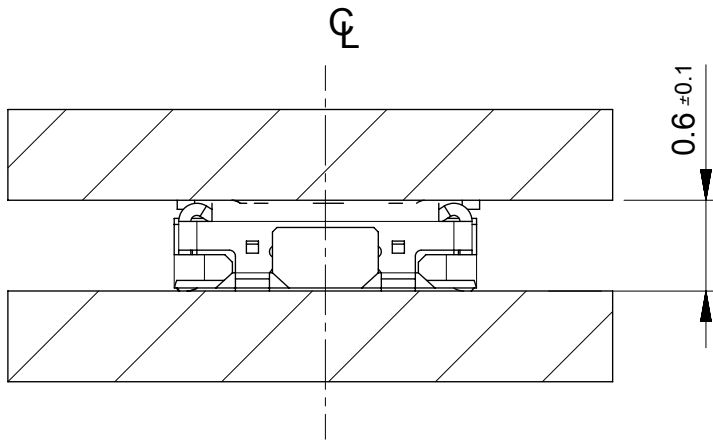

MATED CONDITION

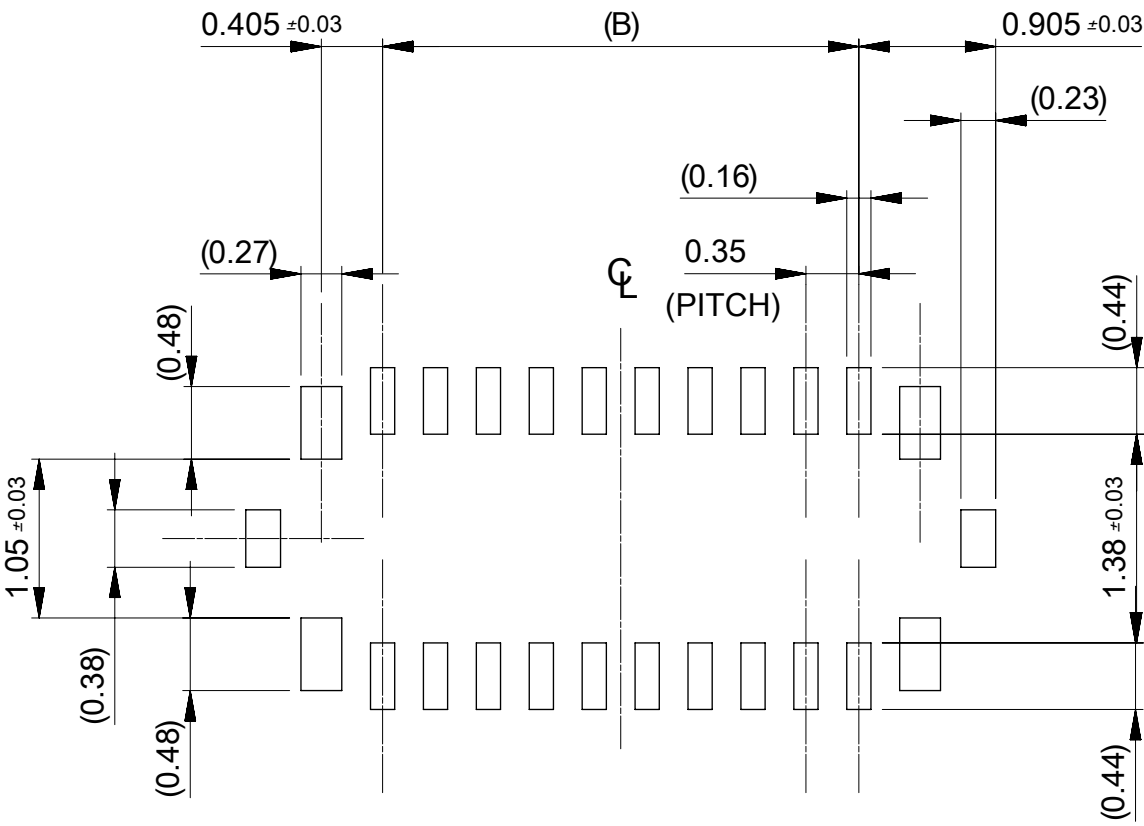

RECOMENDED METAL MASK LAYOUT(REFFERENCE)

RECOMMENDED THICKNESS OF METAL MASK : t=0.08MM
RECOMMENDED OPEN APERTURE RATIO OF METAL MASK : 80%

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[505070-0642](#) [505070-1042](#)