

Surface Mount Directional Coupler

75Ω 12dB 5 to 1250 MHz

ADC-12-4-75+



CASE STYLE: CD542

Features

- wideband, 5-1250 MHz
- low mainline loss, 0.9 dB typ.
- good directivity, 18 dB typ.
- good VSWR, 1.25:1 typ.
- excellent coupling flatness, ± 0.15 dB typ.
- aqueous washable
- protected by U.S. Patents 6,133,525 & 6,140,887

Applications

- cable tv

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		5		1250	MHz
Mainline Loss ¹	5 - 870	—	0.85	1.2	dB
	870 - 1250	—	1.0	1.6	
Coupling	5 - 1250	—	12.8 $\pm$ 0.5	—	dB
Coupling Flatness ($\pm$)	5 - 870	—	0.15	0.4	dB
	5 - 1250	—	0.2	0.6	
Directivity	5 - 50	20	25	—	dB
	50 - 870	12	16	—	
	870 - 1250	8	11	—	
Return Loss (Input)	5 - 50	16	18	—	dB
	50 - 1250	15	17	—	
Return Loss (Output)	5 - 50	18	22	—	dB
	50 - 1250	15	18	—	
Return Loss (Coupling)	5 - 50	15	18	—	dB
	50 - 1250	10	16	—	
Input Power	5 - 20	—	—	0.5	W
	20 - 1250	—	—	1.0	

1. Mainline loss includes theoretical power loss at coupled port.

Maximum Ratings


Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

Function	Pin Number
INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2
75Ω TERM EXTERNAL	4
ISOLATE (DO NOT USE)	5

Electrical Schematic

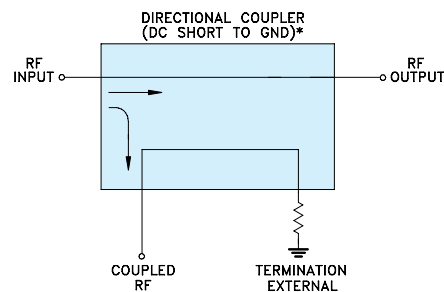

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


REV. G
M151854
ED-7093/1
ADC-12-4-75+
WP/CP/AM
171019
Page 1 of 2

ADC-12-4-75+

Outline Drawing

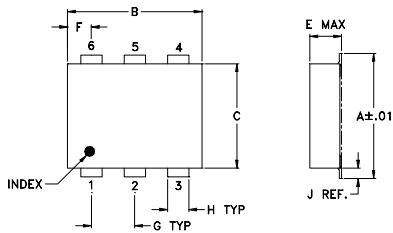

PCB Land Pattern




Suggested Layout,
Tolerance to be within ± 0.002

Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L			wt
.030	.026	.065	.300			grams
0.76	0.66	1.65	7.62			0.20




Demo Board MCL P/N: TB-08 Suggested PCB Layout (PL-042)

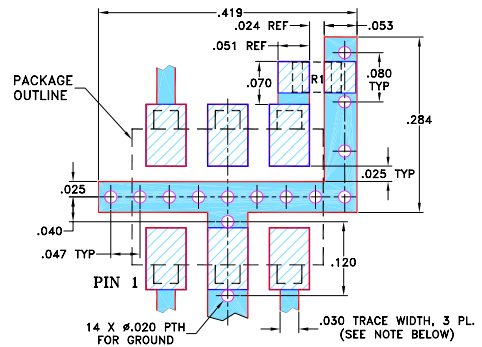

- RESISTOR R1: 75 Ohm, 0805 SIZE.
- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" $\pm$.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	In	Return Loss (dB) Out	Cpl
5	0.99	12.65	25.19	18.87	22.23	18.64
10	0.86	12.57	26.29	20.90	26.61	20.52
50	0.79	12.55	26.57	22.74	34.48	22.12
100	0.81	12.58	25.50	22.97	33.35	22.38
200	0.82	12.62	23.44	23.13	30.30	23.19
450	0.81	12.74	19.79	21.50	22.55	26.58
600	0.81	12.82	18.05	20.35	19.86	25.64
850	0.83	13.01	15.16	18.27	18.68	20.07
1000	0.89	13.14	12.77	17.61	18.41	17.43
1250	1.03	13.32	11.14	18.42	19.67	14.35

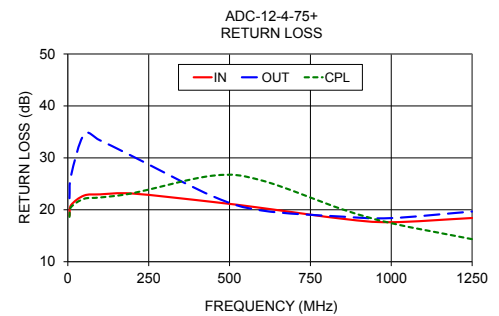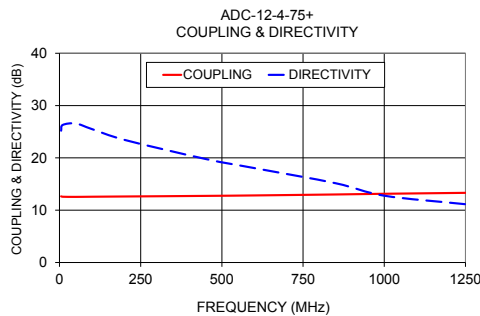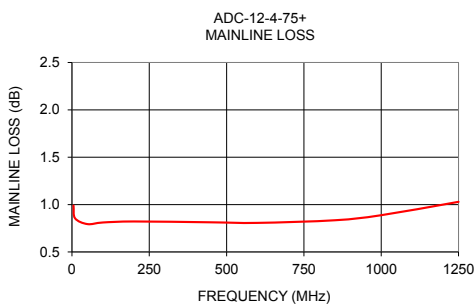

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ADC-12-4-75+](#)