




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		D5	REVISED PER ECO-12-011527	19JUN2012	RGV	DCS
			D6	REVISED PER ECO-13-006897	22APR2013	DLD	DCS
			D7	REVISED PER ECO-13-013385	24OCT2013	DLD	DCS

D


C

B

A

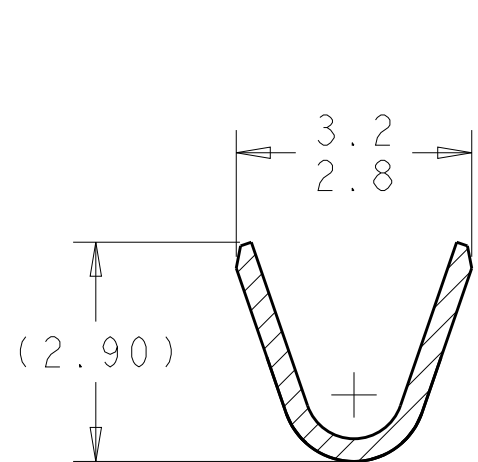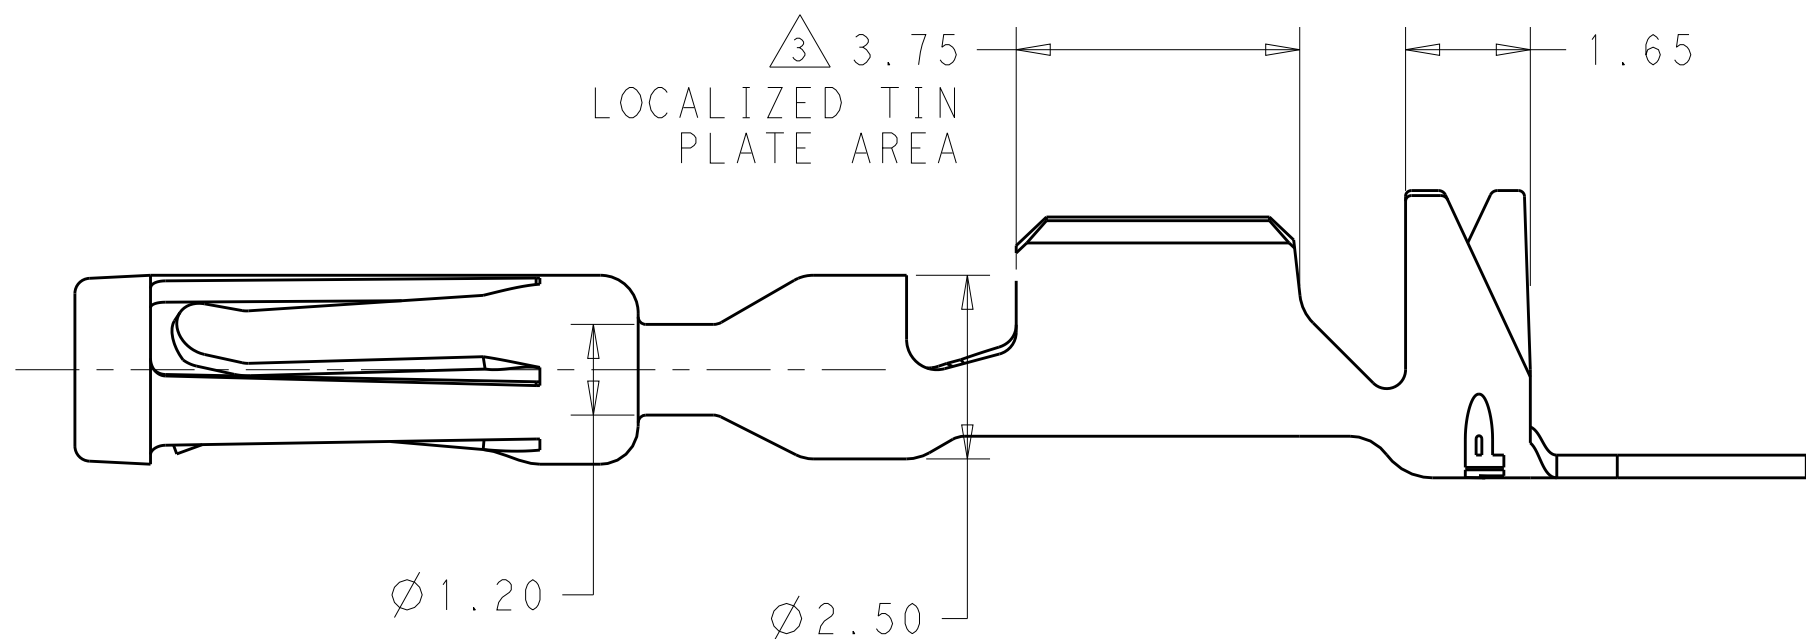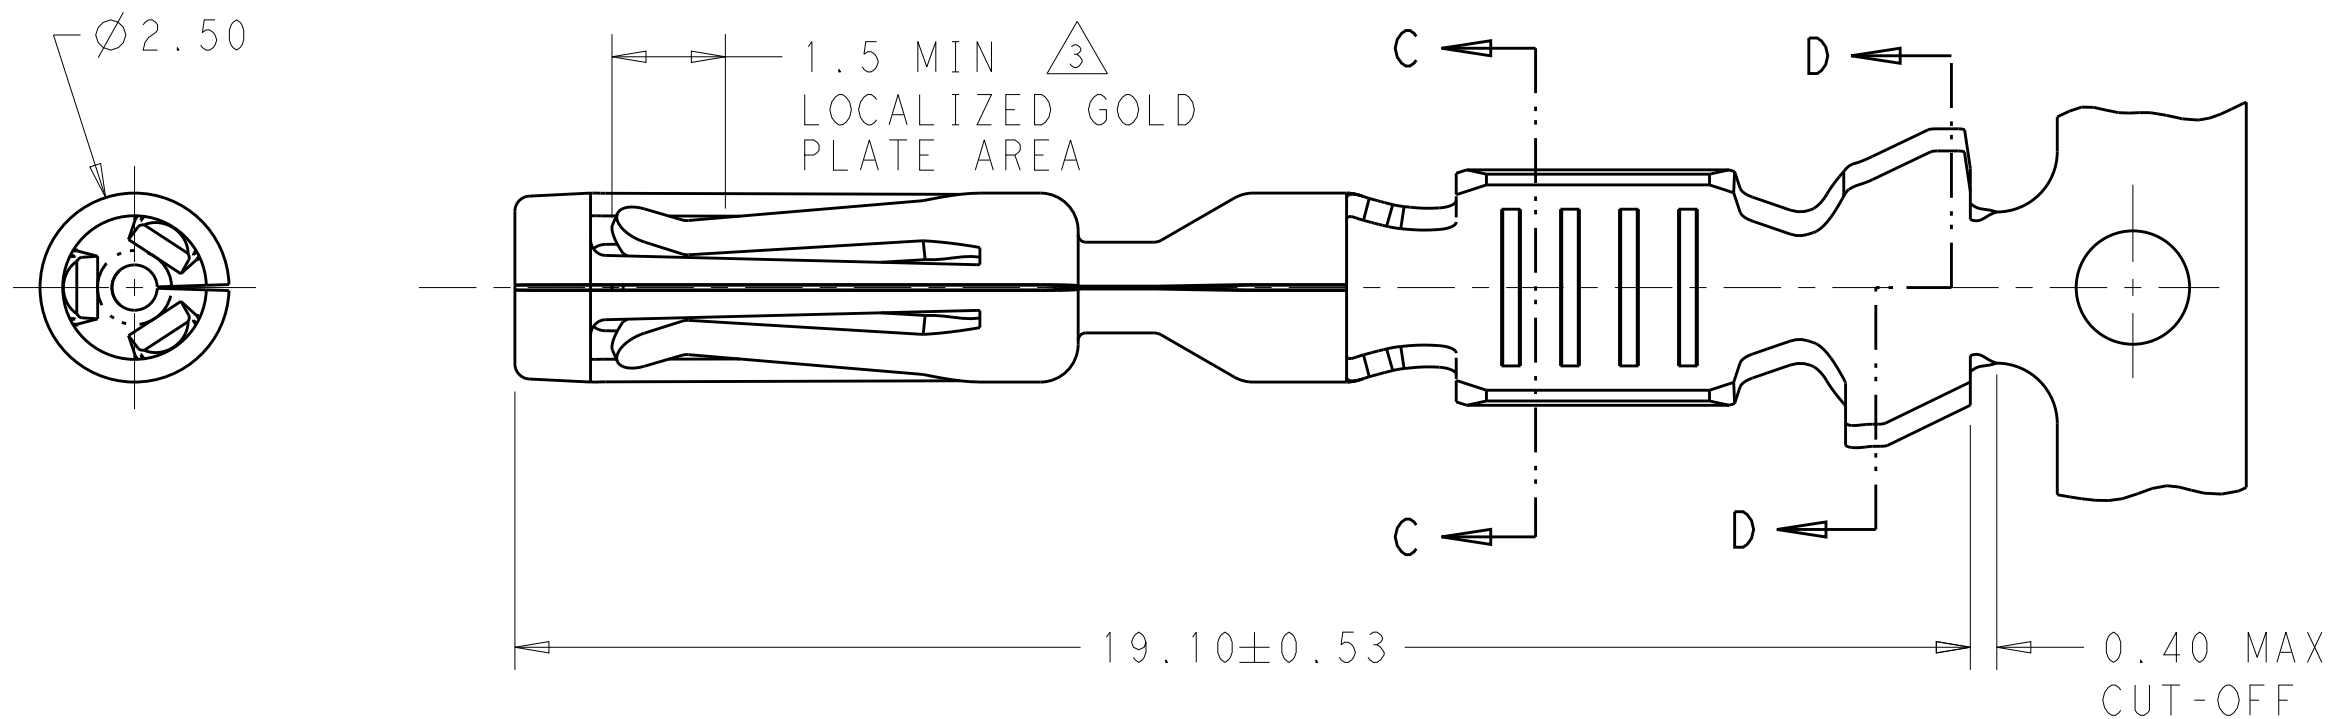

SECTION C-C
ROTATED 90° CW

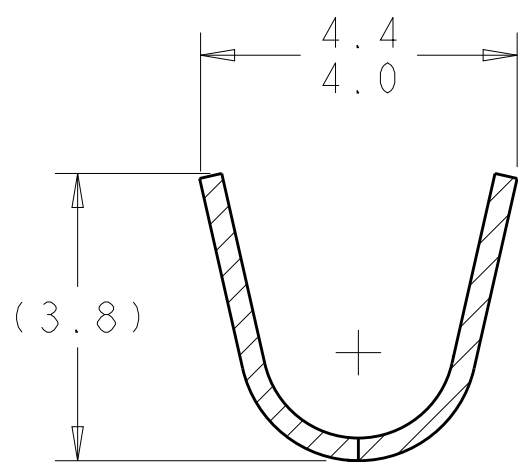

SECTION D-D
ROTATED 90° CW

1. WIRE RANGE: 20-16 AWG, 1.0mm², 1.5mm².
2. INSULATION RANGE: 1.70-2.70.
3. .00075 MIN GOLD IN THE LOCALIZED GOLD PLATE AREA, .0025 MIN MATTE TIN IN THE LOCALIZED TIN PLATE AREA OVER .00125 MIN NICKEL OVER ENTIRE CONTACT.
4. USED WITH AMPSEAL PLUG ASSEMBLY: 776286, 776273, 770680, 776164.

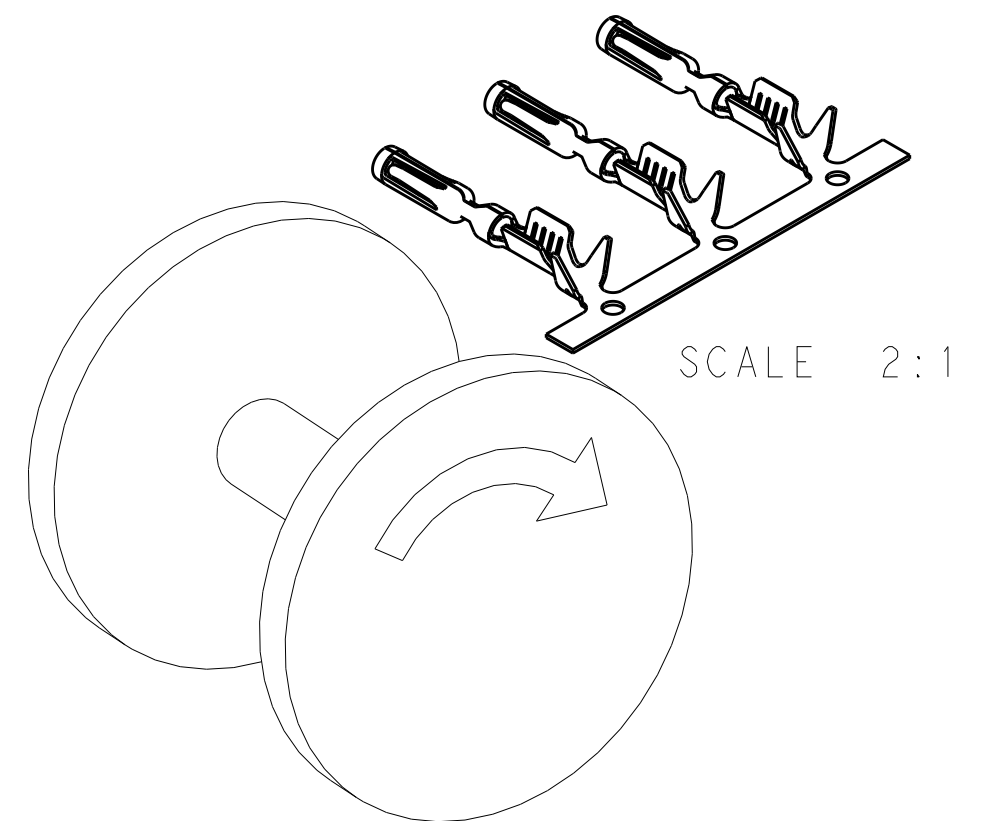


FIGURE 1
FINAL PAYOUT DIRECTION

770854-3	GOLD 3	0.38 COPPER ALLOY	770520-3
770854-1	PRE-TIN	0.38 COPPER ALLOY	770520-1
LOOSE PIECE	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL CHK D. STRAUSSER APVD D. STRAUSSER	19JUN2012 19JUN2012 19JUN2012	TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME CONTACT, AMPSEAL			
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES FINISH		± ± ±0.15 ± ± ± ±		SIZE 108-1329			
MATERIAL SEE TABLE		SEE TABLE		CAGE CODE A200779			
				DRAWING NO C-770520			
				RESTRICTED TO -			
				SCALE 10:1			
				SHEET 1 OF 1			
				REV D7			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[770520-1](#)