

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

1700716011

Status:


Active

Overview:

High-Speed Pluggable I/O Solutions

Description:

zSFP+ Stacked Ganged Assembly with Elastomeric Gasket, 2-by-6 with 4 Light Pipes, 240 Circuits

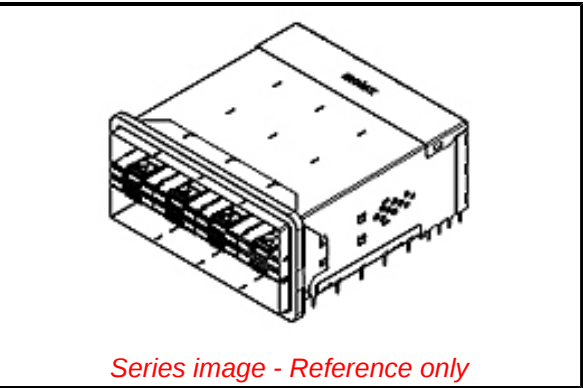

Documents:	
3D Model	Application Specification AS-170071-0002-001 (PDF)
3D Model (PDF)	Test Summary TS-170071-0001-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-170071-0001 (PDF)	

Agency Certification	
UL	E29179
General	
Product Family	I/O Connectors
Series	170071
Application	Module-to-Board
Component Type	Receptacle
Electrical Model	Yes
Overview	High-Speed Pluggable I/O Solutions
Product Name	zSFP Plus, zSFP+
Type	N/A
UPC	884982402331
Physical	
Circuits (Loaded)	240
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Gender	Female
Lock to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	145.264/g
Number of Rows	2
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	2.36mm
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	12
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Electrical	

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ECHA_01_2020 (16 January 2020)	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

170071 Series

Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Stacked Multi-Port Extraction Tool, 2 by 6	622029950
2-by-6 SFP Stacked Multi-Port Insertion Tool	622030155

Current - Maximum per Contact	0.5A
Shield Type	N/A
Shielded	Yes
Voltage - Maximum	30V AC
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-170071-0002-001
Electrical Model Document	EE-170071-0001
Product Specification	PS-170071-0001
S-Parameter Model	SP-170426-1000
Sales Drawing	1700710002-000
Symbol/Footprint Data	SYM-170071-0001
Test Summary	TS-170071-0001-001

This document was generated on 04/16/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

170071-6011