

HLMP-Pxxx Series, HLMP-Qxxx Series, HLMP-6xxx Series, HLMP-70xx Series



Subminiature LED Lamps

Data Sheet

Description

Flat Top Package

The HLMP-Pxxx Series flat top lamps use an untinted, non-diffused, truncated lens to provide a wide radiation pattern that is necessary for use in backlighting applications. The flat top lamps are also ideal for use as emitters in light pipe applications.

Dome Packages

The HLMP-6xxx Series dome lamps for use as indicators use a tinted, diffused lens to provide a wide viewing angle with a high on-off contrast ratio. High brightness lamps use an untinted, nondiffused lens to provide a high luminous intensity within a narrow radiation pattern.

Resistor Lamps

The HLMP-6xxx Series 5 volt subminiature lamps with built in current limiting resistors are for use in applications where space is at a premium.

Lead Configurations

All of these devices are made by encapsulating LED chips on axial lead frames to form molded epoxy subminiature lamp packages. A variety of package configuration options is available. These include special surface mount lead configurations, gull wing, yoke lead or Z-bend. Right angle lead bends at 2.54 mm (0.100 inch) and 5.08 mm (0.200 inch) center spacing are available for through hole mounting. For more information refer to Standard SMT and Through Hole Lead Bend Options for Subminiature LED Lamps data sheet.

Features

- Subminiature flat top package
 - Ideal for backlighting and light piping applications
- Subminiature dome package
 - Diffused dome for wide viewing angle
 - Non-diffused dome for high brightness
- TTL and LSTTL compatible 5V resistor lamps
- Available in six colors
- Ideal for space limited applications
- Axial leads
- Available with lead configurations for surface mount and through hole PCB mounting



Device Selection Guide

Part Number: HLMP-xxxx



Standard Red	DH AS AlGaAs Red	High Efficiency Red	Orange	Yellow	High Perf. Green	Emerald Green	Device Description	Device Outline Drawing
P005	P105	P205	P405	P305	P505	P605	Untinted, Non-diffused, Flat Top	A
	P102	P202	P402	P302	P502		Untinted, Diffused, Flat Top	A
6000	Q100	6300	Q400	6400	6500	Q600	Tinted, Diffused	B
	Q105	6305	Q405	6405	6505	Q605	Untinted, Nondiffused, High Brightness	B
	Q150	7000		7019	7040		Tinted, Diffused, Low Current	B
	Q155						Nondiffused, Low Current	B
		6600			6800		Tinted, Diffused, Resistor, 5V, 10 mA	B
		6620		6720	6820		Diffused, Resistor, 5V, 4 mA	B

Package Dimensions


Flat Top Lamps

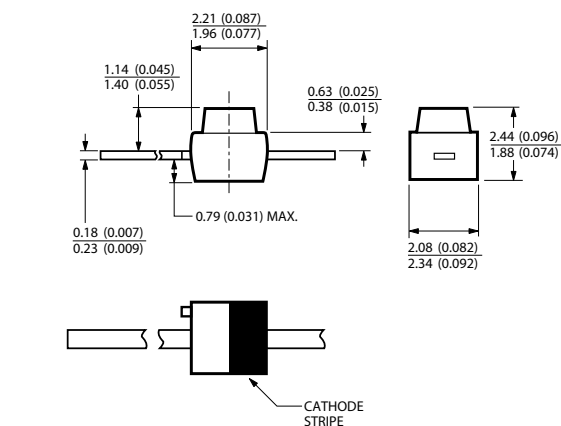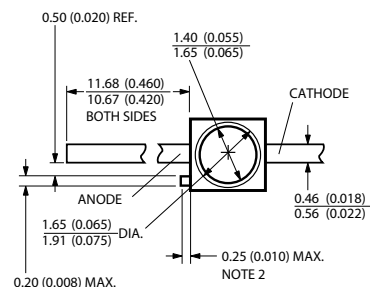

Diffused and Nondiffused

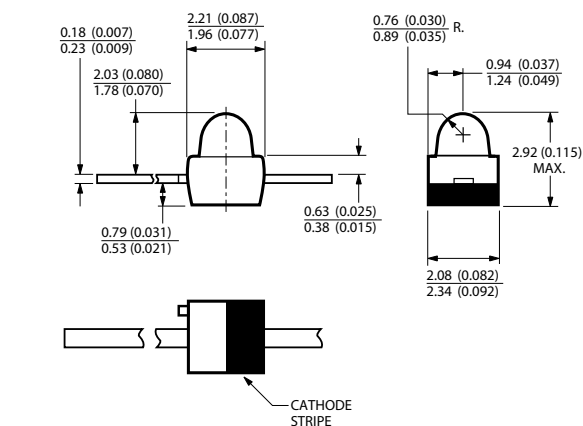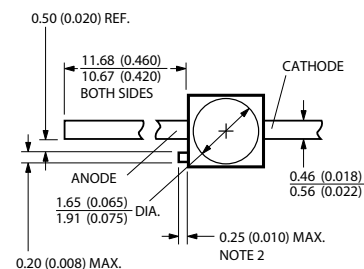

- NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETRES (INCHES).
 2. PROTRUDING SUPPORT TAB IS CONNECTED TO CATHODE LEAD.
 3. LEAD POLARITY FOR ALGaAs LAMPS IS OPPOSITE TO THE LEAD POLARITY OF SUBMINIATURE LAMPS USING OTHER TECHNOLOGIES.

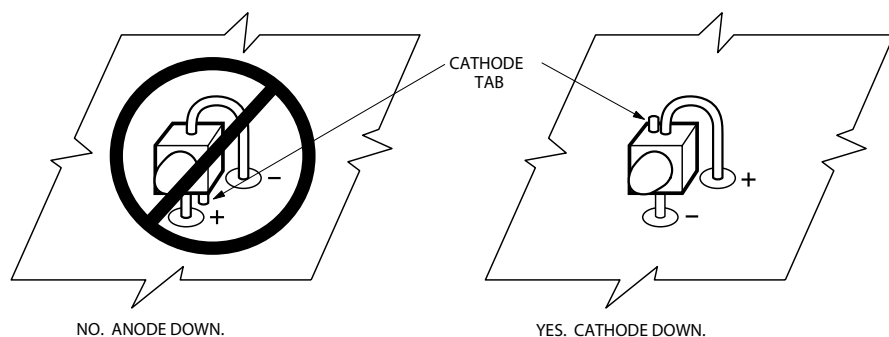Figure 1: Proper Right Angle Mounting to a PCB to Prevent Protruding Cathode Tab from Shorting to Anode Connection**Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$)**

Parameter	Standard Red	DH AS AlGaAs Red	High Eff. Red	Orange	Yellow	High Perf. Green	Emerald Green	Unit
DC Forward Current ^[1]	50	30	30	30	20	30	30	mA
Peak Forward Current ^[2]	1000	300	90	90	60	90	90	mA
DC Forward Voltage (Resistor Lamps Only)			6		6	6	6	V
Reverse Voltage (IR = 100 μA)	5	5	5	5	5	5	5	V
Transient Forward Current (10 μs Pulse)	2000	500	500	500	500	500	500	mA
Operating Temperature Range								°C
Non-Resistor Lamps	−55 to +100	−40 to +100		−55 to +100		−40 to +100	−20 to +100	
Resistor Lamps				−40 to +85		−20 to +85		
Storage Temperature Range	−55 to +100							
For Thru Hole Devices: Wave Soldering Temperature [1.6 mm (0.063 in.) from body]	260°C for 5 seconds							
For Surface Mount Devices: Reflow Soldering Temperature	260°C for 20 seconds							

Notes:

1. See Figure 5 for current derating vs. ambient temperature. Derating is not applicable to resistor lamps.
2. Refer to Figure 6 showing Max. Tolerable Peak Current vs. Pulse Duration to establish pulsed operating conditions.
3. The transient peak current is the maximum non-recurring peak current the device can withstand without failure. Do not operate these lamps at this high current.

Electrical/Optical Characteristics ($T_A = 25^\circ\text{C}$)**Standard Red**

Device HLMP-	Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
6000-E00xx	Luminous Intensity ^[1]	I_V	0.63	1.2		mcd	$I_F = 10\text{ mA}$
6000-G00xx			1.60	3.2			
P005-F00xx			1.0	2.5			
All	Forward Voltage	V_F	1.4	1.6	2.0	V	$I_F = 10\text{ mA}$
	Reverse Breakdown Voltage	V_R	5.0	12.0		V	$I_R = 100\text{ }\mu\text{A}$
6000	Included Angle Between Half Intensity Points ^[2]	$2\theta_{1/2}$		90		Deg.	
P005				125			
All	Peak Wavelength	λ_{PEAK}		655		nm	
	Dominant Wavelength ^[3]	λ_d		640		nm	
	Spectral Line Half Width	$\Delta\lambda_{1/2}$		24		nm	
	Speed of Response	τ_s		15		ns	
	Capacitance	C		100		pF	$V_F = 0; f = 1\text{ MHz}$
	Thermal Resistance	$R\theta_{J-PIN}$		170		$^\circ\text{C/W}$	Junction-to-Cathode Lead
	Luminous Efficacy ^[4]	η_v		65		lm/W	

DH AS AlGaAs Red

Device HLMP-	Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
P102-F00xx	Luminous Intensity ^[1]	I_V	1.0	20.0		mcd	$I_F = 20 \text{ mA}$
P105-L00xx			10.0	30.0			
P105-NP000			25		80		
Q100-M00xx			16	45			
Q100-N00xx			25.0	45.0			
Q100-PQ000			40		125		
Q105-P00xx			40	200			
Q105-ST000			160		500		$I_F = 1 \text{ mA}$
Q150-F00xx			1.0	1.8			
Q155-F00xx			1.0	4.0			
Q100	Forward Voltage	V_F		1.8	2.2	V	$I_F = 20 \text{ mA}$
Q150/Q155				1.6	1.8		$I_F = 1 \text{ mA}$
All	Reverse Breakdown Voltage	V_R	5.0	15.0		V	$I_R = 100 \mu\text{A}$
P105	Included Angle Between Half Intensity Points ^[2]	$2\theta_{1/2}$		125		Deg.	
Q100/Q150				90			
Q105/Q155				28			
All	Peak Wavelength	λ_{PEAK}		645		nm	Measured at Peak
	Dominant Wavelength ^[3]	λ_d		637		nm	
	Spectral Line Half Width	$\Delta\lambda_{1/2}$		20		nm	
	Speed of Response	τ_s		30		ns	Exponential Time Constant; e^{-t/τ_s}
	Capacitance	C		30		pF	$V_F = 0$; $f = 1 \text{ MHz}$
	Thermal Resistance	$R\theta_{J-PIN}$		170		°C/W	Junction-to-Cathode Lead
	Luminous Efficacy ^[4]	η_V		80		lm/W	

High Efficiency Red

Device HLMP-	Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
P202-F00xx	Luminous Intensity ^[1]	I_V	1.0	5.0		mcd	
P205-F00xx			1.0	8.0			$I_F = 10 \text{ mA}$
6300-F00xx			1.0	10.0			
6300-KL000			6.3		20.0		
6305-L00xx			10.0	40.0			
7000-D00xx			0.4	1.0			$I_F = 2 \text{ mA}$
6600-G00xx			1.6	5.0			$V_F = 5.0\text{V}$
6620-F00xx			1.0	2.0			
All	Forward Voltage (Nonresistor Lamps)	V_F	1.5	1.8	3.0	V	$I_F = 10 \text{ mA}$
6600	Forward Current (Resistor Lamps)	I_F		9.6	13.0	mA	$V_F = 5.0\text{V}$
5620				3.5	5.0		
All	Reverse Breakdown Voltage	V_R	5.0	30.0		V	$I_R = 100 \mu\text{A}$
P205	Included Angle Between Half Intensity Points ^[2]	$2\theta_{1/2}$		125		Deg.	
6305				28			
All Diffused				90			
All	Peak Wavelength	λ_{PEAK}		635		nm	Measured at Peak
	Dominant Wavelength ^[3]	λ_d		626		nm	
	Spectral Line Half Width	$\Delta\lambda_{1/2}$		40		nm	
	Speed of Response	τ_s		90		ns	
	Capacitance	C		11		pF	$V_F = 0; f = 1 \text{ MHz}$
	Thermal Resistance	$R_{\theta J-PIN}$		170		°C/W	Junction-to-Cathode Lead
	Luminous Efficacy ^[4]	η_v		145		lm/W	

Orange

Device HLMP-	Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
P402-F00xx	Luminous Intensity	I_V	1.0	4.0		mcd	$I_F = 10 \text{ mA}$
P405-F00xx			1.0	6			
P405-JK000			4.0		12.5		
Q400-F00xx			1.0	8			
Q405-H00xx			2.5	14			
All	Forward Voltage	V_F	1.5	1.9	3.0	V	$I_F = 10 \text{ mA}$
	Reverse Breakdown Voltage	V_R	5.0	30.0		V	$I_R = 100 \mu\text{A}$
P40x	Included Angle Between Half Intensity Points ^[2]	$2\theta_{1/2}$		125		Deg.	
Q40x				90			
All	Peak Wavelength	λ_{PEAK}		600		nm	
	Dominant Wavelength ^[3]	λ_d		602		nm	Measured at Peak
	Spectral Line Half Width	$\Delta\lambda_{1/2}$		40		nm	
	Speed of Response	τ_s		260		ns	
	Capacitance	C		4		pF	$V_F = 0; f = 1 \text{ MHz}$
	Thermal Resistance	$R\theta_{J-PIN}$		170		°C/W	Junction-to-Cathode Lead
	Luminous Efficacy ^[4]	η_v		380		lm/W	

Yellow

Device HLMP-	Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
P302-F00xx	Luminous Intensity	I_V	1.0	3.0		mcd	$I_F = 10 \text{ mA}$
P305-F00xx			1.0	4.0			
6400-F00xx			1.0	9.0	12.5		
6400-JK000			4.0				
6405-J00xx			3.6	20			
6405-MN0xx			16		50		
7019-D00xx			0.4	0.6			$I_F = 2 \text{ mA}$
6720-F00xx			0.9	2.0			
All	Forward Voltage (Nonresistor Lamps)	V_F		2.0	2.4	V	$I_F = 10 \text{ mA}$
6720	Forward Current (Resistor Lamps)	I_F		3.5	5.0	mA	$V_F = 5V$
All	Reverse Breakdown Voltage	V_R	5.0	50.0		V	
P305	Included Angle Between Half Intensity Points ^[2]	$2\theta_{1/2}$		125		Deg.	
6405				28			
All Diffused				90			
All	Peak Wavelength	λ_{PEAK}		583		nm	Measured at Peak
	Dominant Wavelength ^[3]	λ_d		585		nm	
	Spectral Line Half Width	$\Delta\lambda_{1/2}$		36		nm	
	Speed of Response	τ_s		90		ns	
	Capacitance	C		15		pF	$V_F = 0; f = 1 \text{ MHz}$
	Thermal Resistance	$R\theta_{J-PIN}$		170		°C/W	Junction-to-Cathode Lead
	Luminous Efficacy ^[4]	η_v		500		lm/W	

High Performance Green

Device HLMP-	Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
P502-F00xx	Luminous Intensity	I_V	1.0	3.0		mcd	
P505-F00xx			1.6	6.3			$I_F = 10 \text{ mA}$
6500-F00xx			1.0	7.0			
6505-L00xx			10.0	40.0			
7040-D00xx			0.4	0.6			$I_F = 2 \text{ mA}$
6800-G00xx			1.6	5.0			$V_F = 5 \text{ V}$
6820-F00xx			1.0	2.0			
All	Forward Voltage (Nonresistor Lamps)	V_F		2.1	2.7	V	$I_F = 10 \text{ mA}$
6800	Forward Current (Resistor Lamps)	I_F		9.6	13.0	mA	$V_F = 5 \text{ V}$
6820				3.5	5.0		
All	Reverse Breakdown Voltage	V_R	5.0	50.0		V	$I_R = 100 \mu\text{A}$
P505	Included Angle Between Half Intensity Points ^[2]	$2\theta_{1/2}$		125		Deg.	
6505				28			
All Diffused				90			
All	Peak Wavelength	λ_{PEAK}		565		nm	
	Dominant Wavelength ^[3]	λ_d		569		nm	
	Spectral Line Half Width	$\Delta\lambda_{1/2}$		28		nm	
	Speed of Response	τ_s		500		ns	
	Capacitance	C		18		pF	$V_F = 0; f = 1 \text{ MHz}$
	Thermal Resistance	$R\theta_{J-PIN}$		170		°C/W	Junction-to-Cathode Lead
	Luminous Efficacy ^[4]	η_V		595		lm/W	

High Performance Green^[1]

Device HLMP-	Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
P605-F00xx	Luminous Intensity	I_V	1.0	1.5		mcd	$I_F = 10 \text{ mA}$
Q600-F00xx			1.0	1.5			
Q605-F00xx			1.0	7.5			
All	Forward Voltage	V_F		2.2	3.0	V	$I_F = 10 \text{ mA}$
	Reverse Breakdown Voltage	V_R	5.0			V	$I_R = 100 \mu\text{A}$
P605	Included Angle Between Half Intensity Points ^[2]	$2\theta_{1/2}$		125		Deg.	
Q60x				90			
All	Peak Wavelength	λ_{PEAK}		558		nm	
	Dominant Wavelength ^[3]	λ_d		560		nm	Measured at Peak
	Spectral Line Half Width	$\Delta\lambda_{1/2}$		24		nm	
	Speed of Response	τ_s		3100		ns	
	Capacitance	C		35		pF	$V_F = 0; f = 1 \text{ MHz}$
	Thermal Resistance	$R\theta_{J-PIN}$		170		°C/W	Junction-to-Cathode Lead
	Luminous Efficacy ^[4]	η_v		656		lm/W	

Note:

1. Please refer to Application Note 1061 for information comparing standard green and emerald green light output degradation.

Figure 2: Relative Intensity vs. Wavelength


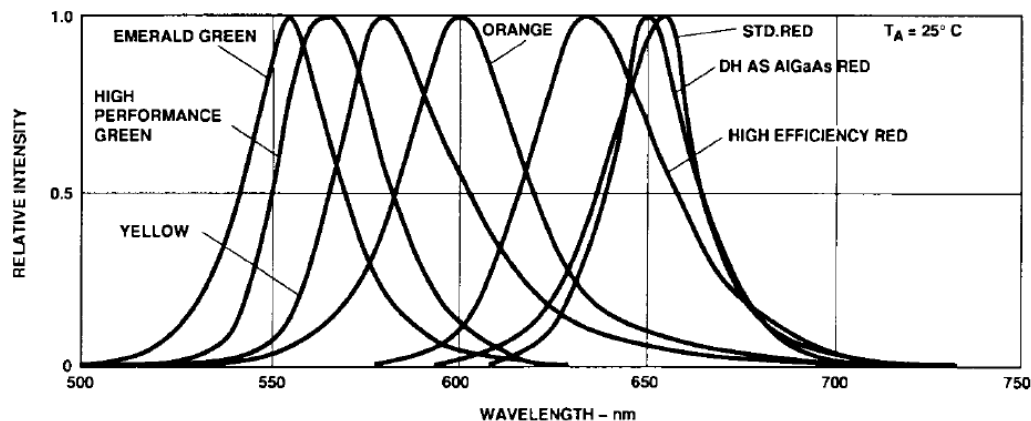


Figure 3: Forward Current vs. Forward Voltage (Non-Resistor Lamp)

Standard Red and DH AS AlGaAs Red

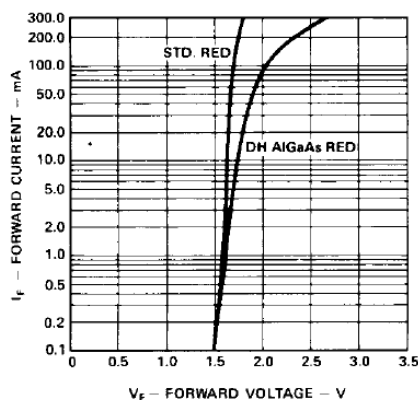

High Efficiency Red, Orange, Yellow, High Performance Green, and Emerald Green



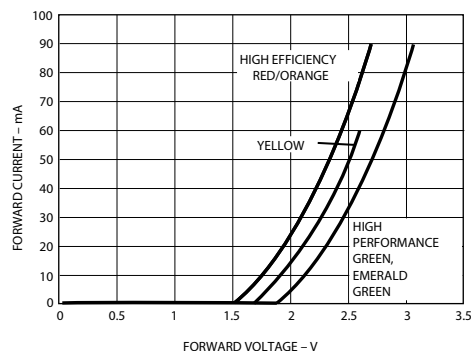


Figure 4: Relative Luminous Intensity vs. Forward Current (non-resistor lamp)

Standard Red, DH As AlGaAs Red

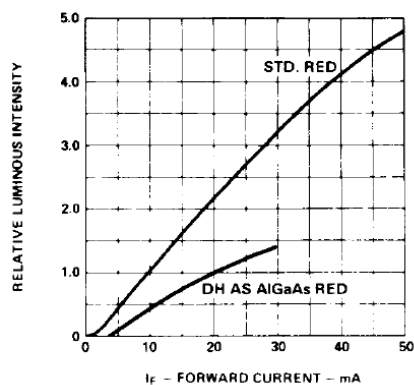

Low Current

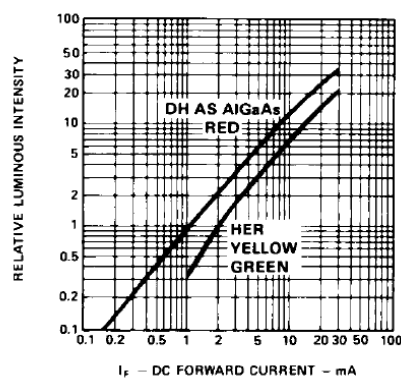

HER, Orange, Yellow, and High Performance Green, and Emerald Green

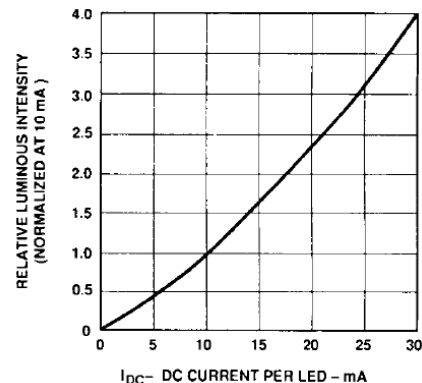


Figure 5: Relative Efficiency (Luminous Intensity per Unit Current) vs. Peak Current (Non-Resistor Lamps)

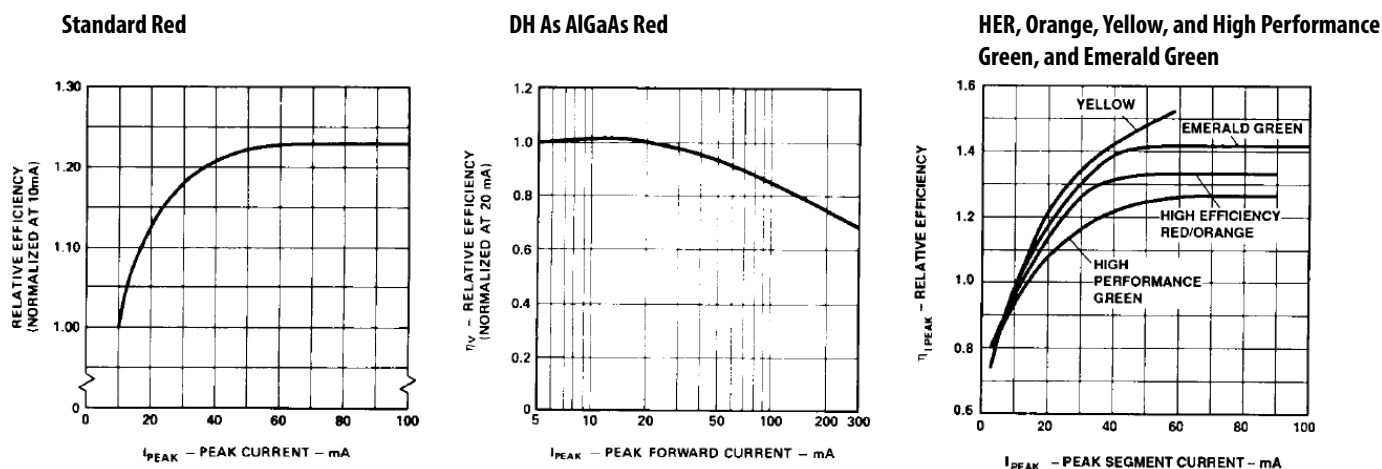
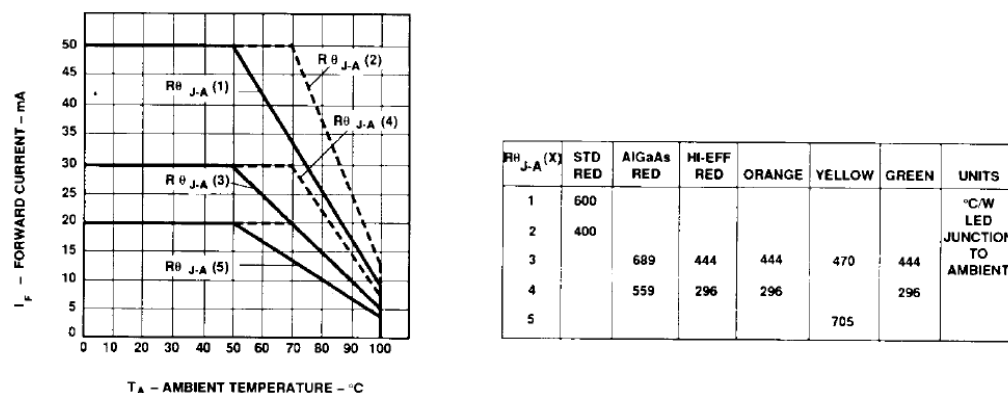
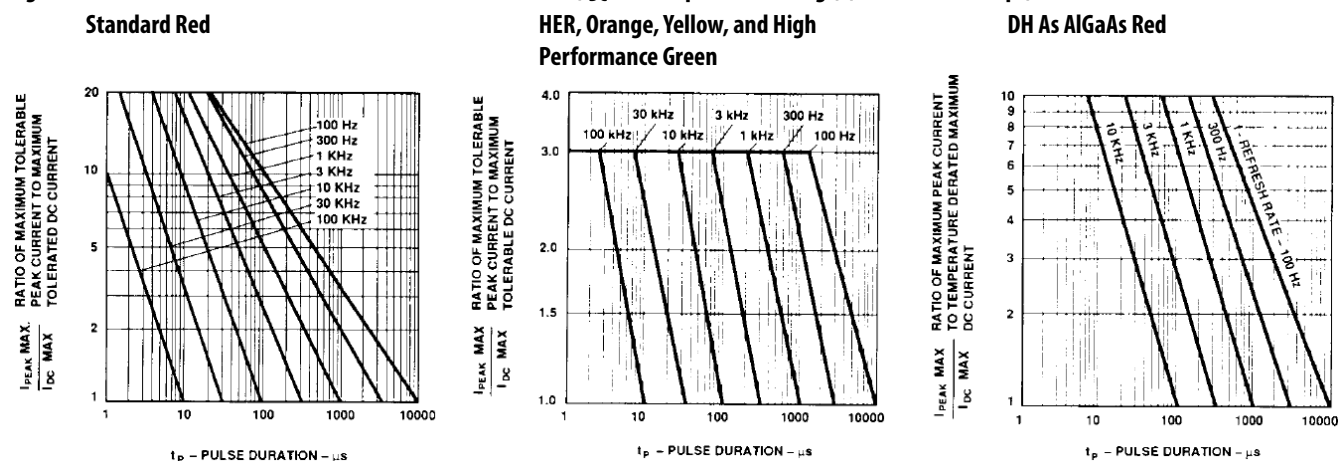
Figure 6: Maximum Forward DC Current vs. Ambient Temperature (Derating based on T_J Max. = 110°C [non-resistor lamps])Figure 7: Maximum Tolerable Peak Current vs. Pulse Duration (I_{DC} Max. as per Max. ratings) (non-resistor lamps)

Figure 8: Resistor Lamp Forward Current vs. Forward Voltage

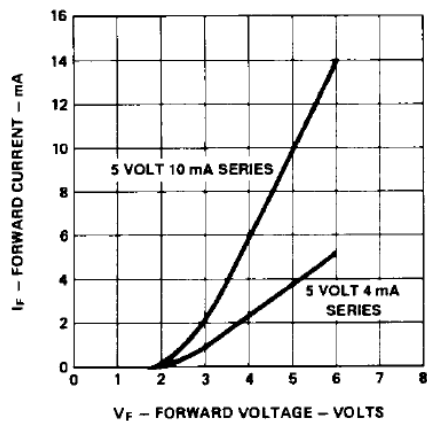


Figure 9: Resistor Lamp Luminous Intensity vs. Forward Voltage



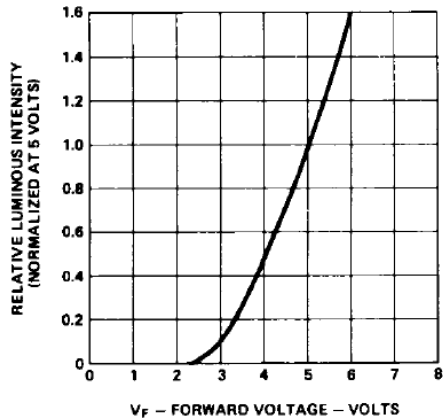


Figure 10: Relative Intensity vs. Angular Displacement

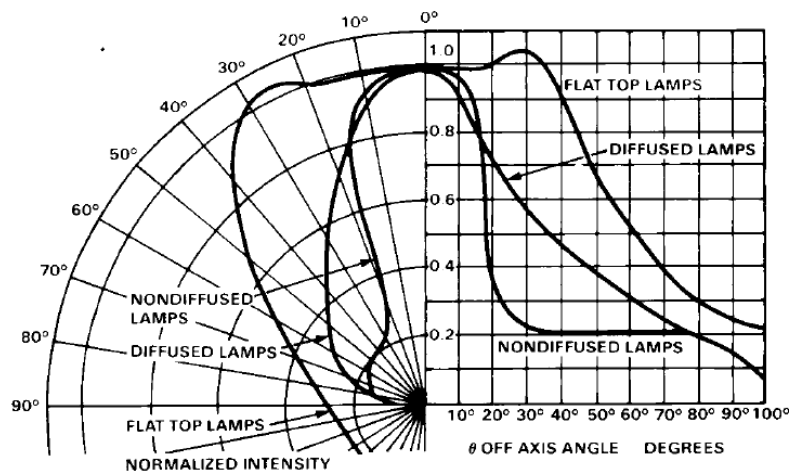

Ordering Information

HLMx-XXXX-X X X X X

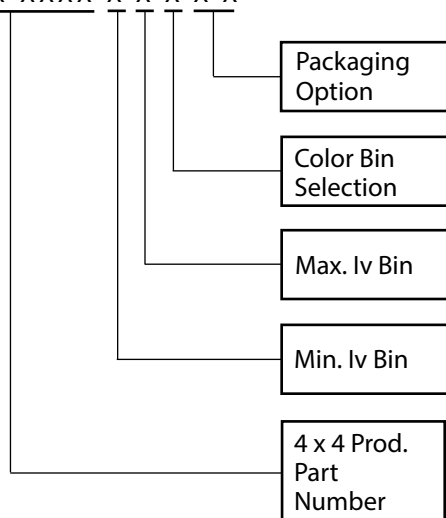

Intensity Bin Limits

Bin	Min.	Max.
A	0.10	0.20
B	0.16	0.32
C	0.25	0.50
D	0.40	0.80
E	0.63	1.25
F	1.00	2.00
G	1.60	3.20
H	2.50	5.00
J	4.00	8.00
K	6.30	12.50
L	10.00	20.00
M	16.00	32.00
N	25.00	50.00
P	40.00	80.00
Q	63.00	125.00
R	100.00	200.00
S	160.00	320.00
T	250.00	500.00
U	400.00	800.00
V	630.00	1250.00
W	1000.00	2000.00
X	1600.00	3200.00
Y	2500.00	5000.00

Color Bin Limits

Package	Bin	Min.	Max.
Emerald Green	0	Full Distribution	
	9	552	556
	8	555	559
	7	558	562
	6	561	565
Green	0	Full Distribution	
	6	561	565
	5	564	568
	4	567	571
	3	570	574
	2	573	577
Yellow	0	Full Distribution	
	1	581.5	585.0
	2	584.0	587.5
	3	586.5	590.0
	4	589.0	592.5
	5	591.5	593.5
	6	591.5	595.0
	7	594.0	597.5
Orange	0	Full Distribution	
	1	596.5	600.0
	2	599.0	602.5
	3	601.5	604.0
	4	603.8	608.2
	5	606.8	611.2
	6	609.8	614.2
	7	612.8	617.2
	8	615.8	620.2

Mechanical Option

00	Straight Leads, Bulk Packaging, Quantity of 500 Parts
10	Right Angle Housing, Bulk Packaging, Quantity of 500 Parts
11	Gull Wing Leads, 12 mm Tape on 7 in. Dia. Reel, 1500 Parts per Reel
12	Gull Wing Lead, Bulk Packaging, Quantity of 500 Parts
14	Gull Wing Leads, 12 mm Tape on 13 in. Dia. Reel, 6000 Parts per Reel
21	Yoke Leads, 12 mm Tape on 7 in. Dia. Reel, 1500 Parts per Reel
22	Yoke Leads, Bulk Packaging, Quantity of 500 Parts
24	Yoke Leads, 12 mm Tape on 13 in. Dia. Reel, 6000 Parts per Reel
31	Z-Bend Leads, 12 mm Tape on 7 in. Dia. Reel, 1500 Parts per Reel
32	Z-Bend Leads, Bulk Packaging, Quantity of 500 Parts
34	Z-Bend Leads, 12 mm Tape on 13 in. Dia. Reel, 6000 Parts per Reel
1L	2.54 mm (0.100 inch) Center Lead Spacing, Long Leads; 10.4 mm (0.410 in.)
1S	2.54 mm (0.100 inch) Center Lead Spacing, Short Leads; 3.7 mm (0.145 in.)
2L	5.08 mm (0.200 inch) Center Lead Spacing, Long Leads; 10.4 mm (0.410 in.)
2S	5.08 mm (0.200 inch) Center Lead Spacing, Short Leads; 3.7 mm (0.145 in.)

Note: All Categories are established for classification of products. Products may not be available in all categories. Please contact your local Avago representative for further clarification/information.

For product information and a complete list of distributors, please go to our web site:
www.broadcom.com.



Broadcom, the pulse logo, Connecting everything, Avago Technologies, Avago, the A logo, and R²Coupler are among the trademarks of Broadcom and/or its affiliates in the United States, certain other countries and/or the EU.

Broadcom Proprietary and Confidential. Copyright © 2017 Broadcom. All Rights Reserved. The term "Broadcom" refers to Broadcom Limited and/or its subsidiaries.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

AV02-3609EN – April 12, 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Broadcom Limited:

[HLMP-6000](#) [HLMP-6000-E0010](#) [HLMP-6000-E0011](#) [HLMP-6000-E001S](#) [HLMP-6000-G0000](#) [HLMP-6000-G0010](#)
[HLMP-6300](#) [HLMP-6300-F0010](#) [HLMP-6300-F0011](#) [HLMP-6300-F001S](#) [HLMP-6300-F0021](#) [HLMP-6300-F0031](#)
[HLMP-6300-KL000](#) [HLMP-6305](#) [HLMP-6305-L0011](#) [HLMP-6305-L0021](#) [HLMP-6305-L0031](#) [HLMP-6400](#) [HLMP-](#)
[6400-F0010](#) [HLMP-6400-F0011](#) [HLMP-6400-F001S](#) [HLMP-6400-F0021](#) [HLMP-6400-F0031](#) [HLMP-6400-JK000](#)
[HLMP-6405](#) [HLMP-6405-J0011](#) [HLMP-6405-J0021](#) [HLMP-6405-J0031](#) [HLMP-6500](#) [HLMP-6500-F0010](#) [HLMP-](#)
[6500-F0011](#) [HLMP-6500-F001S](#) [HLMP-6500-F0021](#) [HLMP-6500-F0031](#) [HLMP-6500-JK000](#) [HLMP-6505](#) [HLMP-](#)
[6505-L0011](#) [HLMP-6505-L001L](#) [HLMP-6505-L001S](#) [HLMP-6505-L0021](#) [HLMP-6505-L002S](#) [HLMP-6505-L0031](#)
[HLMP-6505-NP000](#) [HLMP-6600](#) [HLMP-6600-G0010](#) [HLMP-6600-G0011](#) [HLMP-6620](#) [HLMP-6620-F0010](#) [HLMP-](#)
[6620-F0011](#) [HLMP-6620-F001S](#) [HLMP-6620-F0021](#) [HLMP-6620-F0031](#) [HLMP-6700-G0010](#) [HLMP-6700-G0011](#)
[HLMP-6720](#) [HLMP-6720-F0010](#) [HLMP-6720-F0011](#) [HLMP-6720-F0021](#) [HLMP-6720-F0031](#) [HLMP-6800](#) [HLMP-](#)
[6800-G0011](#) [HLMP-6820](#) [HLMP-6820-F0010](#) [HLMP-6820-F0011](#) [HLMP-6820-F0012](#) [HLMP-6820-F001S](#) [HLMP-](#)
[6820-F0021](#) [HLMP-7000](#) [HLMP-7000-D0010](#) [HLMP-7000-D0011](#) [HLMP-7000-D001S](#) [HLMP-7000-D0021](#) [HLMP-](#)
[7019](#) [HLMP-7019-D0011](#) [HLMP-7019-D001S](#) [HLMP-7019-D0021](#) [HLMP-7040](#) [HLMP-7040-D0010](#) [HLMP-7040-](#)
[D0011](#) [HLMP-7040-D001L](#) [HLMP-7040-D0021](#) [HLMP-7040-D0031](#) [HLMP-P005-F0011](#) [HLMP-P005-F0031](#) [HLMP-](#)
[P102-F0032](#) [HLMP-P105](#) [HLMP-P105-L0011](#) [HLMP-P105-L0021](#) [HLMP-P105-L002L](#) [HLMP-P105-NP000](#) [HLMP-](#)
[P106](#) [HLMP-P106-Q0011](#) [HLMP-P156-EG011](#) [HLMP-P156-EG031](#) [HLMP-P202](#) [HLMP-P205](#) [HLMP-P205-F0011](#)
[HLMP-P205-F0031](#) [HLMP-P302-F002S](#) [HLMP-P305-F0011](#)