

Low Pass Filter

50Ω DC to 216 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

RF IN	2
RF OUT	6
GROUND	1, 3, 4, 5, 7, 8





Outline Drawing

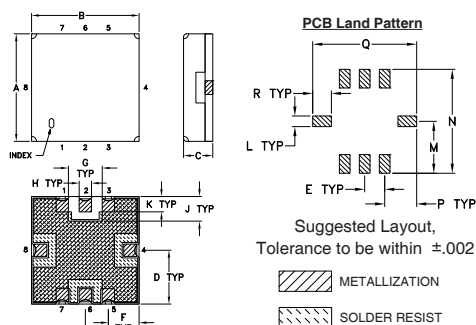

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.350	.350	.100	.175	.075	.100	.110	.040	.080
8.89	8.89	2.54	4.45	1.93	2.54	2.79	1.02	2.03
K	L	M	N	P	Q	R		
.050	.040	.195	.390	.120	.390	.070		wt.
1.27	1.02	4.95	9.91	3.05	9.91	1.78		grams
								0.25

Demo Board MCL P/N: TB-332 Suggested PCB Layout (PL-176)

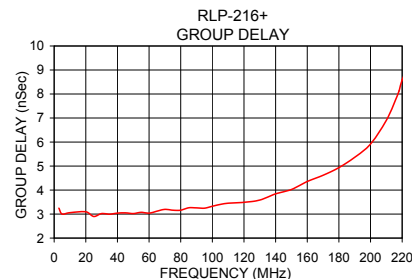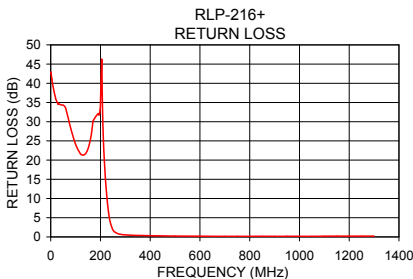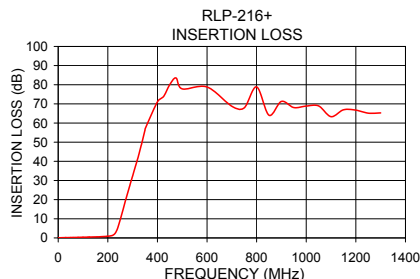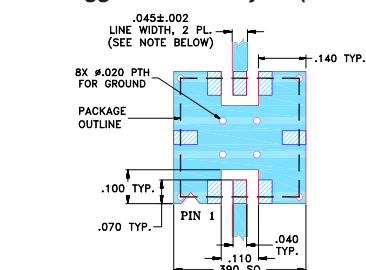

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Features

- high rejection
- sharp insertion loss roll off
- excellent VSWR, 1.1:1 typ. @ passband
- aqueous washable

Applications

- wireless communications
- receivers / transmitters



CASE STYLE: GP731

+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500, 1000


Low Pass Filter Electrical Specifications (T_{AMB} = 25°C)

PASSBAND (MHz)	f _{co} , MHz Nom.	STOPBAND (MHz)	VSWR (:1)
(Loss < 2dB)	(Loss 3dB)	(Loss > 20dB) (Loss > 40dB)	Passband Typ. Stopband Typ.
DC - 216	232	295 - 340 340 - 1300	1.1 20

Typical Frequency Response



Functional Schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nSec)
$\bar{x}$	σ			
0.5	0.05	0.01	42.75	
50.0	0.20	0.00	34.32	3.00
100.0	0.37	0.00	24.10	3.06
200.0	0.89	0.01	34.46	2.90
216.0	1.22	0.04	19.35	3.04
220.0	1.43	0.07	15.08	3.07
227.0	2.14	0.15	9.51	3.20
232.0	3.06	0.22	6.64	3.26
239.0	5.09	0.33	3.90	3.33
252.0	10.54	0.41	1.63	3.49
274.0	20.77	0.41	0.76	3.59
295.0	30.10	0.41	0.56	4.02
340.0	50.42	0.67	0.40	4.36
400.0	80.53	5.62	0.32	4.62
500.0	75.90	6.34	0.22	5.37
800.0	74.72	3.28	0.15	6.91
1000.0	69.23	2.91	0.17	7.79
1300.0	67.62	3.20	0.21	8.59

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[RLP-216+](#)