
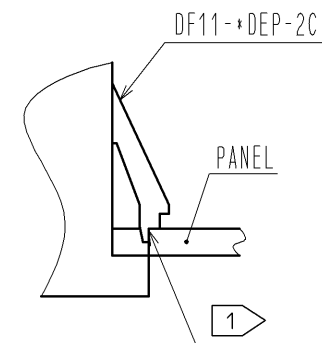


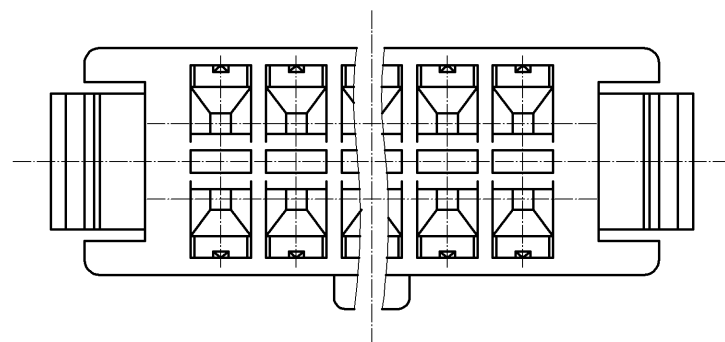

NOTE ①> PLEASE USE THE NON-RADIUS SIDE FOR THE PANEL HOOKING AREA.
2. APPLICABLE PANEL THICKENING IS 1.6 TO 1.0mm.
(A SLIGHT DEVIATION WILL OCCUR FOR THE THICKNESS EXCEPT FOR 1.6 AND 1.2mm.)
3. LENGTH OF MATING WITH 'DF11-DC-2C' IS 15.3mm.
④> THE WALL IN CENTER DOESN'T EXIST FOR 4 AND 6 CONTACTS.

				1	PORYAMIDE	UL94V-0(BLACK)		
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS	
UNITS mm		SCALE 5 : 1	COUNT  3	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
				DIS-H-004178		YK. NAKATSU	TS. FUKUSHIMA	09. 09. 14
 HIROSE ELECTRIC CO., LTD.		APPROVED : KJ. KATAYOSE	05. 01. 05	DRAWING NO. EDC3-081880-01				
		CHECKED : TY. OMA	05. 01. 05	PART NO. DF11- * DEP-2C				
		DESIGNED : IO. DENPOUYA	05. 01. 05	CODE NO. CL543-				
		DRAWN : IO. DENPOUYA	05. 01. 05	 1  1				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF11-8DEP-2C](#)