

APPROVAL SHEET

MULTILAYER CERAMIC CAPACITORS

Soft Termination Series

(SH_6.3V to 3000V)

NP0, X7R, X5R & Y5V Dielectrics

0402 to 2225 Sizes

Halogen Free & RoHS Compliance

*Contents in this sheet are subject to change without prior notice.

1. INTRODUCTION

WTC soft termination series MLCC is designed and with a polymer layer within end terminations of product, which can absorb mechanical stress caused by PCB handling in SMT line and reduce the mechanical impact for product. It will offer more robust and reliable performance in applications.

2. FEATURES

- MLCC's termination are with a soft & flexible polymer layer to withstand high bending stress in SMT line.
- Available for any item in standard series range.

3. APPLICATIONS

- Automotive industry.
- Power supply and related industries.
- Lighting industry.
- The other mechanical stress concerned products.

4. HOW TO ORDER

<u>SH</u>	<u>31</u>	<u>B</u>	<u>104</u>	<u>K</u>	<u>500</u>	<u>C</u>	<u>I</u>
<u>Series</u>	<u>Size</u>	<u>Dielectric</u>	<u>Capacitance</u>	<u>Tolerance</u>	<u>Rated voltage</u>	<u>Termination</u>	<u>Packaging</u>
SH=Soft termination	15=0402 (1005) 18=0603 (1608) 21=0805 (2012) 31=1206 (3216) 32=1210 (3225) 43=1812 (4532) 46=1825 (4563) 55=2220 (5750) 56=2225 (5763)	N=NP0 (COG) B=X7R X=X5R F=Y5V	Two significant digits followed by no. of zeros. And R is in place of decimal point. Eg: 104=10x10 ⁴ =100nF	B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10% M=±20% Z=-20/+80%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 6R3=6.3 VDC 100=10 VDC 160=16 VDC 250=25 VDC 500=50 VDC 101=100 VDC 201=200 VDC 251=250 VDC 401=400 VDC 451=450 VDC 501=500 VDC 631=630 VDC 102=1000 VDC 152=1500 VDC 202=2000 VDC 252= 2500 VDC 302=3000 VDC	C=Ag Polymer /Ni/Sn	T=7" reeled G=13" reeled

5. EXTERNAL DIMENSIONS & CONSTRUCTIONS

Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol	Remark	M _B (mm)
0402 (1005)	1.00±0.20	0.50±0.20	0.50±0.20 E	#	0.25 +0.05/-0.10
0603 (1608)	1.60±0.20	0.80±0.10	0.80±0.07 S		0.40±0.15
	1.60±0.30	0.80±0.30	0.80±0.30 X		
0805 (2012)	2.00±0.20	1.25±0.10	0.60±0.10 A		0.50±0.20
			0.80±0.10 B		
			1.25±0.10 D	#	
	2.00±0.30	1.25±0.30	1.25±0.30 I	#	
1206 (3216)	3.20+0.4/-0.1	1.60±0.15	0.80±0.10 B		0.60±0.20 (0.50±0.25)*
			0.95±0.10 C	#	
			1.15±0.15 J	#	
			1.25±0.10 D	#	
	3.20+0.4/-0.1	1.60±0.20	1.60±0.20 G	#	
	3.20±0.50	1.60±0.50	1.60±0.50 P	#	
1210 (3225)	3.20±0.40	2.50±0.20	0.95±0.10 C	#	0.75±0.25
			1.25±0.10 D	#	
	3.20±0.60	2.50±0.50	1.60±0.20 G	#	
			2.00±0.20 K	#	
			2.50±0.50 M	#	
1808 (4520)	4.50+0.6/-0.4	2.03±0.25	1.25±0.10 D	#	0.50±0.25
			2.00±0.20 K	#	
1812 (4532)	4.50+0.6/-0.4	3.20±0.30	1.25±0.10 D	#	0.75±0.25 (0.50±0.25)*
			1.60±0.20 G	#	
		3.20±0.40	2.00±0.20 K	#	
			2.50±0.50 M	#	
1825 (4563)	4.50+0.6/-0.4	6.30±0.40	2.00±0.20 (K)	#	0.75±0.35
2220 (5750)	5.70±0.50	5.00±0.40	2.50±0.30 (M)	#	0.85±0.35
2225 (5763)	5.70±0.50	6.30±0.40	2.80±0.30 (U)	#	0.85±0.35




Fig. 1 The outline of MLCC

Reflow soldering only is recommended.

* For 1206 ≥ 1000V, 1812_200V~4000V products.

6. GENERAL ELECTRICAL DATA

Dielectric	NP0		X7R	X5R	Y5V
Size	0402, 0603, 0805, 1206, 1210, 1812, 1825, 2220, 2225				
Capacitance range*	0.1pF to 0.082μF	100pF to 47μF	0.027μF to 10μF	0.01μF to 4.7μF	
Capacitance tolerance**	Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%), K (±10%)	K (±10%), M (±20%)			Z (-20/+80%)
Rated voltage (WVDC)	6.3V to 3000V				
Operating temperature	-55 to +125℃	-55 to +125℃	-55 to +85℃	-25 to +85 ℃	
Capacitance characteristic	±30ppm	±15%	±15%	+30/-80%	
Termination	Ni/Sn (lead-free termination)				

* Measured at the condition of 30~70% related humidity.

NP0: Apply 1.0±0.2Vrms, 1.0MHz±10% for Cap≤1000pF and 1.0±0.2Vrms, 1.0kHz±10% for Cap>1000pF, 25℃ at ambient temperature

X7R, X5R: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 25℃ ambient temperature.

Y5V: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 20℃ ambient temperature.

** Preconditioning for Class II MLCC: Perform a heat treatment at 150±10℃ for 1 hour, then leave in a ambient condition for 24±2 hours before measurement.

7. CAPACITANCE RANGE (NP0 Dielectric)

NP0 Dielectric 0402, 0603 Sizes

DIELECTRIC		NP0											
SIZE		0402					0603						
RATED VOLTAGE (VDC)		10	16	25	50	100	10	16	25	50	100	200	250
Capacitance	0.1pF (0R1)	E	E	E	E								
	0.2pF (0R2)	E	E	E	E								
	0.3pF (0R3)	E	E	E	E		S	S	S	S			
	0.4pF (0R4)	E	E	E	E		S	S	S	S			
	0.5pF (0R5)	E	E	E	E	E	S	S	S	S	S	S	S
	0.6pF (0R6)	E	E	E	E	E	S	S	S	S	S	S	S
	0.7pF (0R7)	E	E	E	E	E	S	S	S	S	S	S	S
	0.8pF (0R8)	E	E	E	E	E	S	S	S	S	S	S	S
	0.9pF (0R9)	E	E	E	E	E	S	S	S	S	S	S	S
	1.0pF (1R0)	E	E	E	E	E	S	S	S	S	S	S	S
	1.2pF (1R2)	E	E	E	E	E	S	S	S	S	S	S	S
	1.5pF (1R5)	E	E	E	E	E	S	S	S	S	S	S	S
	1.8pF (1R8)	E	E	E	E	E	S	S	S	S	S	S	S
	2.2pF (2R2)	E	E	E	E	E	S	S	S	S	S	S	S
	2.7pF (2R7)	E	E	E	E	E	S	S	S	S	S	S	S
	3.3pF (3R3)	E	E	E	E	E	S	S	S	S	S	S	S
	3.9pF (3R9)	E	E	E	E	E	S	S	S	S	S	S	S
	4.7pF (4R7)	E	E	E	E	E	S	S	S	S	S	S	S
	5.6pF (5R6)	E	E	E	E	E	S	S	S	S	S	S	S
	6.8pF (6R8)	E	E	E	E	E	S	S	S	S	S	S	S
	8.2pF (8R2)	E	E	E	E	E	S	S	S	S	S	S	S
	10pF (100)	E	E	E	E	E	S	S	S	S	S	S	S
	12pF (120)	E	E	E	E	E	S	S	S	S	S	S	S
	15pF (150)	E	E	E	E	E	S	S	S	S	S	S	S
	18pF (180)	E	E	E	E	E	S	S	S	S	S	S	S
	22pF (220)	E	E	E	E	E	S	S	S	S	S	S	S
	27pF (270)	E	E	E	E	E	S	S	S	S	S	S	S
	33pF (330)	E	E	E	E	E	S	S	S	S	S	S	S
	39pF (390)	E	E	E	E	E	S	S	S	S	S	S	S
	47pF (470)	E	E	E	E	E	S	S	S	S	S	S	S
	56pF (560)	E	E	E	E	E	S	S	S	S	S	S	S
	68pF (680)	E	E	E	E	E	S	S	S	S	S	S	S
	82pF (820)	E	E	E	E	E	S	S	S	S	S	S	S
	100pF (101)	E	E	E	E	E	S	S	S	S	S	S	S
	120pF (121)	E	E	E	E	E	S	S	S	S	S	S	S
	150pF (151)	E	E	E	E	E	S	S	S	S	S	S	S
	180pF (181)	E	E	E	E	E	S	S	S	S	S	S	S
	220pF (221)	E	E	E	E	E	S	S	S	S	S	S	S
	270pF (271)	E	E	E	E	E	S	S	S	S	S	X	X
	330pF (331)	E	E	E	E	E	S	S	S	S	S	X	X
	390pF (391)	E	E	E	E	E	S	S	S	S	S	X	X
	470pF (471)	E	E	E	E	E	S	S	S	S	S	X	X
	560pF (561)	E	E	E	E	E	S	S	S	S	S		
	680pF (681)	E	E	E	E	E	S	S	S	S	S		
	820pF (821)	E	E	E	E	E	S	S	S	S	S		
	1,000pF (102)	E	E	E	E	E	S	S	S	S	S		
	1,200pF (122)						X	X	X	X			
	1,500pF (152)						X	X	X	X			
	1,800pF (182)						X	X	X	X			
	2,200pF (222)						X	X	X	X			
	2,700pF (272)						X	X	X	X			
	3,300pF (332)						X	X	X	X			
	3,900pF (392)												
	4,700pF (472)												
	5,600pF (562)												
	6,800pF (682)												
	8,200pF (822)												
	0.010uF (103)												
	0.012uF (123)												

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

Approval Sheet

NP0 Dielectric 0805 Size

DIELECTRIC		NP0									
SIZE		0805									
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	1000
Capacitance	0.5pF (0R5)	A	A	A	A	A	A	A	A	A	D
	0.6pF (0R6)	A	A	A	A	A	A	A	A	A	D
	0.7pF (0R7)	A	A	A	A	A	A	A	A	A	D
	0.8pF (0R8)	A	A	A	A	A	A	A	A	A	D
	0.9pF (0R9)	A	A	A	A	A	A	A	A	A	D
	1.0pF (1R0)	A	A	A	A	A	A	A	A	A	D
	1.2pF (1R2)	A	A	A	A	A	A	A	A	A	D
	1.5pF (1R5)	A	A	A	A	A	A	A	A	A	D
	1.8pF (1R8)	A	A	A	A	A	A	A	A	A	D
	2.2pF (2R2)	A	A	A	A	A	A	A	A	A	D
	2.7pF (2R7)	A	A	A	A	A	A	A	A	A	D
	3.3pF (3R3)	A	A	A	A	A	A	A	A	A	D
	3.9pF (3R9)	A	A	A	A	A	A	A	A	A	D
	4.7pF (4R7)	A	A	A	A	A	A	A	A	A	D
	5.6pF (5R6)	A	A	A	A	A	A	A	A	A	D
	6.8pF (6R8)	A	A	A	A	A	A	A	A	A	D
	8.2pF (8R2)	A	A	A	A	A	A	A	A	A	D
	10pF (100)	A	A	A	A	A	A	A	A	A	D
	12pF (120)	A	A	A	A	A	A	A	A	A	D
	15pF (150)	A	A	A	A	A	A	A	A	A	D
	18pF (180)	A	A	A	A	A	A	A	A	A	D
	22pF (220)	A	A	A	A	A	A	A	A	A	D
	27pF (270)	A	A	A	A	A	A	A	A	A	D
	33pF (330)	A	A	A	A	A	A	A	A	A	D
	39pF (390)	A	A	A	A	A	A	A	A	A	D
	47pF (470)	A	A	A	A	A	A	A	A	A	D
	56pF (560)	A	A	A	A	A	A	A	A	A	D
	68pF (680)	A	A	A	A	A	A	A	A	A	D
	82pF (820)	A	A	A	A	A	A	A	B	B	D
	100pF (101)	A	A	A	A	A	A	B	B	B	D
	120pF (121)	A	A	A	A	A	B	D	D	D	D
	150pF (151)	A	A	A	A	A	B	D	D	D	D
	180pF (181)	A	A	A	A	A	B	D	D	D	D
	220pF (221)	A	A	A	A	A	D	D	D	D	D
	270pF (271)	A	A	A	A	A	D	D	D	D	D
	330pF (331)	A	A	A	A	A	D	D	D	D	D
	390pF (391)	B	B	B	B	B	D	D	D	D	D
	470pF (471)	B	B	B	B	B	D	D	I	I	
	560pF (561)	B	B	B	B	B	D	D	I	I	
	680pF (681)	B	B	B	B	B	D	D	I	I	
	820pF (821)	B	B	B	B	B	D	D	I	I	
	1,000pF (102)	B	B	B	B	B	D	D	I	I	
	1,200pF (122)	B	B	B	B	B	D	D			
	1,500pF (152)	B	B	B	B	B	D	D			
	1,800pF (182)	B	B	B	B	B	D	D			
	2,200pF (222)	B	B	B	B	B	D	D			
	2,700pF (272)	D	D	D	D	D					
	3,300pF (332)	D	D	D	D	D					
	3,900pF (392)	D	D	D	D	D					
	4,700pF (472)	D	D	D	D	D					
	5,600pF (562)	D	D	D	D	D					
	6,800pF (682)	D	D	D	D	D					
	8,200pF (822)	D	D	D	D	D					
	0.010μF (103)	D	D	D	D						

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

Approval Sheet

NP0 Dielectric 1206 Size

DIELECTRIC		NP0											
SIZE		1206											
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	1000	1500	2000
Capacitance	1.0pF (1R0)												
	1.2pF (1R2)	B	B	B	B	B							
	1.5pF (1R5)	B	B	B	B	B	B	B	B	B	B	B	B
	1.8pF (1R8)	B	B	B	B	B	B	B	B	B	B	B	B
	2.2pF (2R2)	B	B	B	B	B	B	B	B	B	B	B	B
	2.7pF (2R7)	B	B	B	B	B	B	B	B	B	B	B	B
	3.3pF (3R3)	B	B	B	B	B	B	B	B	B	B	B	B
	3.9pF (3R9)	B	B	B	B	B	B	B	B	B	B	B	B
	4.7pF (4R7)	B	B	B	B	B	B	B	B	B	B	B	B
	5.6pF (5R6)	B	B	B	B	B	B	B	B	B	B	B	B
	6.8pF (6R8)	B	B	B	B	B	B	B	B	B	B	B	B
	8.2pF (8R2)	B	B	B	B	B	B	B	B	B	B	B	B
	10pF (100)	B	B	B	B	B	B	B	B	B	B	B	B
	12pF (120)	B	B	B	B	B	B	B	B	B	B	B	B
	15pF (150)	B	B	B	B	B	B	B	B	B	B	B	B
	18pF (180)	B	B	B	B	B	B	B	B	B	B	B	B
	22pF (220)	B	B	B	B	B	B	B	B	B	B	B	B
	27pF (270)	B	B	B	B	B	B	B	B	B	B	B	B
	33pF (330)	B	B	B	B	B	B	B	B	B	B	C	C
	39pF (390)	B	B	B	B	B	B	B	B	B	B	C	C
	47pF (470)	B	B	B	B	B	B	B	B	B	C	C	C
	56pF (560)	B	B	B	B	B	B	B	B	B	C	D	D
	68pF (680)	B	B	B	B	B	B	B	B	B	C	D	D
	82pF (820)	B	B	B	B	B	B	B	B	B	D	D	D
	100pF (101)	B	B	B	B	B	B	B	B	B	D	D	D
	120pF (121)	B	B	B	B	B	B	B	B	B	D	G	G
	150pF (151)	B	B	B	B	B	B	B	B	B	D	G	G
	180pF (181)	B	B	B	B	B	B	B	B	B	G	G	G
	220pF (221)	B	B	B	B	B	B	B	B	B	G	G	G
	270pF (271)	B	B	B	B	B	B	C	C	C	G	P	P
	330pF (331)	B	B	B	B	B	B	C	C	C	G	P	P
	390pF (391)	B	B	B	B	B	B	C	C	C	G	P	P
	470pF (471)	B	B	B	B	B	B	C	C	C	G		
	560pF (561)	B	B	B	B	B	B	C	D	D	G		
	680pF (681)	B	B	B	B	B	B	C	D	D	G		
	820pF (821)	B	B	B	B	B	B	C	G	G	G		
	1,000pF (102)	B	B	B	B	B	B	C	G	G	G		
	1,200pF (122)	B	B	B	B	B	B	C	G	G	G		
	1,500pF (152)	B	B	B	B	B	B	D	G	G	G		
	1,800pF (182)	B	B	B	B	B	B	D	G	G	G		
	2,200pF (222)	B	B	B	B	B	B	D	G	G	G		
	2,700pF (272)	B	B	B	B	B	B	D	G	G	G		
	3,300pF (332)	B	B	B	B	B	B	D	G	G	G		
	3,900pF (392)	B	B	B	B	B	B	D	G	G	G		
	4,700pF (472)	B	B	B	B	B	B	D	G	G	G		
	5,600pF (562)	B	B	B	B	B	B						
	6,800pF (682)	C	C	C	C	C							
	8,200pF (822)	D	D	D	D	D							
	0.010μF (103)	D	D	D	D	D							
	0.012μF (123)	P	P	P	P	P							
	0.015μF (153)	P	P	P	P	P							
	0.018μF (183)	P	P	P	P	P							
	0.022μF (223)	P	P	P	P	P							
	0.027μF (273)	P	P	P	P	P							
	0.033μF (333)	P	P	P	P	P							
	0.039μF (393)	P	P	P	P	P							

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

Approval Sheet

NP0 Dielectric 1210 Size

DIELECTRIC		NP0											
SIZE		1210											
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	1000	1500	2000
Capacitance	10pF (100)	C	C	C	C	C	C	C	C	C	C	C	C
	12pF (120)	C	C	C	C	C	C	C	C	C	C	C	C
	15pF (150)	C	C	C	C	C	C	C	C	C	C	C	C
	18pF (180)	C	C	C	C	C	C	C	C	C	C	C	C
	22pF (220)	C	C	C	C	C	C	C	C	C	C	C	C
	27pF (270)	C	C	C	C	C	C	C	C	C	C	C	C
	33pF (330)	C	C	C	C	C	C	C	C	C	C	C	C
	39pF (390)	C	C	C	C	C	C	C	C	C	C	C	C
	47pF (470)	C	C	C	C	C	C	C	C	C	C	C	C
	56pF (560)	C	C	C	C	C	C	C	C	C	C	D	D
	68pF (680)	C	C	C	C	C	C	C	C	C	C	D	D
	82pF (820)	C	C	C	C	C	C	C	C	C	C	D	D
	100pF (101)	C	C	C	C	C	C	C	C	C	D	D	D
	120pF (121)	C	C	C	C	C	C	C	C	C	D	D	D
	150pF (151)	C	C	C	C	C	C	C	C	C	D	G	G
	180pF (181)	C	C	C	C	C	C	C	C	C	D	G	G
	220pF (221)	C	C	C	C	C	C	C	C	C	G	G	G
	270pF (271)	C	C	C	C	C	C	C	C	C	G	K	K
	330pF (331)	C	C	C	C	C	C	C	C	C	G	K	K
	390pF (391)	C	C	C	C	C	C	C	C	C	G	M	M
	470pF (471)	C	C	C	C	C	C	C	C	C	G	M	M
	560pF (561)	C	C	C	C	C	C	C	C	C	G		
	680pF (681)	C	C	C	C	C	C	C	C	C	G		
	820pF (821)	C	C	C	C	C	C	C	C	C	G		
	1,000pF (102)	C	C	C	C	C	D	D	D	D	G		
	1,200pF (122)	C	C	C	C	C	D	D	D	D	G		
	1,500pF (152)	C	C	C	C	C	D	D	D	D	K		
	1,800pF (182)	C	C	C	C	C	D	D	D	D	M		
	2,200pF (222)	C	C	C	C	C	D	D	D	D	M		
	2,700pF (272)	C	C	C	C	C	D	D	D	D	M		
	3,300pF (332)	C	C	C	C	C	D	D	D	D	M		
	3,900pF (392)	C	C	C	C	C	D	D	D	D	M		
	4,700pF (472)	C	C	C	C	C	G	G					
	5,600pF (562)	C	C	C	C	C	G	G					
	6,800pF (682)	C	C	C	C	C	G	G					
	8,200pF (822)	C	C	C	C	C	G	G					
	0.010μF (103)	C	C	C	C	C	G	G					
	0.012μF (123)	D	D	D	D	D							
	0.015μF (153)	D	D	D	D	D							
	0.018μF (183)												
	0.022μF (223)												
	0.027μF (273)												
	0.033μF (333)												
	0.039μF (393)												
	0.047μF (473)												

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

NP0 Dielectric 1808 Size

DIELECTRIC		NP0					
SIZE		1808					
RATED VOLTAGE (VDC)		500	630	1000	1500	2000	3000
Capacitance	2.0pF (2R0)						
	2.2pF (2R2)	D	D	D	D	D	D
	2.7pF (2R7)	D	D	D	D	D	D
	3.3pF (3R3)	D	D	D	D	D	D
	3.9pF (3R9)	D	D	D	D	D	D
	4.7pF (4R7)	D	D	D	D	D	D
	5.6pF (5R6)	D	D	D	D	D	D
	6.8pF (6R8)	D	D	D	D	D	D
	8.2pF (8R2)	D	D	D	D	D	D
	10pF (100)	D	D	D	D	D	D
	12pF (120)	D	D	D	D	D	D
	15pF (150)	D	D	D	D	D	D
	18pF (180)	D	D	D	D	D	D
	22pF (220)	D	D	D	D	D	D
	27pF (270)	D	D	D	D	D	D
	33pF (330)	D	D	D	D	D	D
	39pF (390)	D	D	D	D	D	D
	47pF (470)	D	D	D	D	D	D
	56pF (560)	D	D	D	D	D	D
	68pF (680)	D	D	D	D	D	D
	82pF (820)	D	D	D	D	D	D
	100pF (101)	D	D	D	D	D	K
	120pF (121)	D	D	D	D	D	K
	150pF (151)	D	D	D	K	K	K
	180pF (181)	D	D	D	K	K	K
	220pF (221)	D	D	D	K	K	K
	270pF (271)	K	K	K	K	K	K
	330pF (331)	K	K	K	K	K	K
	390pF (391)	K	K	K	K	K	K
	470pF (471)	K	K	K	K	K	
	560pF (561)	K	K	K	K	K	
	680pF (681)	K	K	K	K	K	
	820pF (821)	K	K	K	D	D	
	1,000pF (102)	K	K	K	G	G	
	1,200pF (122)	K	K	G			
	1,500pF (152)	K	K	G			
	1,800pF (182)	K	K	K			
	2,200pF (222)	K	K	K			
	2,700pF (272)	K	K				
	3,300pF (332)	K	K				
	3,900pF (392)						

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

NP0 Dielectric 1812 Size

DIELECTRIC		NP0												
SIZE		1812												
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	1000	1500	2000	3000
Capacitance	10pF (100)	D	D	D	D	D	D	D	D	D	D	D	D	D
	12pF (120)	D	D	D	D	D	D	D	D	D	D	D	D	D
	15pF (150)	D	D	D	D	D	D	D	D	D	D	D	D	D
	18pF (180)	D	D	D	D	D	D	D	D	D	D	D	D	D
	22pF (220)	D	D	D	D	D	D	D	D	D	D	D	D	D
	27pF (270)	D	D	D	D	D	D	D	D	D	D	D	D	D
	33pF (330)	D	D	D	D	D	D	D	D	D	D	D	D	D
	39pF (390)	D	D	D	D	D	D	D	D	D	D	D	D	D
	47pF (470)	D	D	D	D	D	D	D	D	D	D	D	D	D
	56pF (560)	D	D	D	D	D	D	D	D	D	D	D	D	D
	68pF (680)	D	D	D	D	D	D	D	D	D	D	D	D	D
	82pF (820)	D	D	D	D	D	D	D	D	D	D	D	D	D
	100pF (101)	D	D	D	D	D	D	D	D	D	D	D	D	D
	120pF (121)	D	D	D	D	D	D	D	D	D	D	D	D	D
	150pF (151)	D	D	D	D	D	D	D	D	D	D	D	D	D
	180pF (181)	D	D	D	D	D	D	D	D	D	D	D	D	K
	220pF (221)	D	D	D	D	D	D	D	D	D	D	D	D	K
	270pF (271)	D	D	D	D	D	D	D	D	D	D	K	K	K
	330pF (331)	D	D	D	D	D	D	D	D	D	D	K	K	K
	390pF (391)	D	D	D	D	D	D	D	D	D	D	K	K	K
	470pF (471)	D	D	D	D	D	D	D	D	D	K	K	K	K
	560pF (561)	D	D	D	D	D	D	D	D	D	K	K	K	
	680pF (681)	D	D	D	D	D	D	D	D	D	K	K	K	
	820pF (821)	D	D	D	D	D	D	D	D	D	K	K	K	
	1,000pF (102)	D	D	D	D	D	D	D	D	D	K	K	K	
	1,200pF (122)	D	D	D	D	D	D	D	D	D	K			
	1,500pF (152)	D	D	D	D	D	D	D	D	D	K			
	1,800pF (182)	D	D	D	D	D	D	D	D	D	K			
	2,200pF (222)	D	D	D	D	D	D	D	D	D	K			
	2,700pF (272)	D	D	D	D	D	D	D	D	D	K			
	3,300pF (332)	D	D	D	D	D	D	D	D	D	K			
	3,900pF (392)	D	D	D	D	D	D	D	D	D	M			
	4,700pF (472)	D	D	D	D	D	D	D	D	D				
	5,600pF (562)	D	D	D	D	D	D	D	D	D				
	6,800pF (682)	D	D	D	D	D	D	D	D	D				
	8,200pF (822)	D	D	D	D	D	D	D	D	D				
	0.010μF (103)	D	D	D	D	D	D	D	D	D				
	0.012μF (123)	D	D	D	D	D	D	D	G	G				
	0.015μF (153)	D	D	D	D	D	D	D	G	G				
	0.018μF (183)	D	D	D	D	D	D	D	K	K				
	0.022μF (223)	D	D	D	D	D	D	D	K	K				
	0.027μF (273)	D	D	D	D	D	D	D						
	0.033μF (333)	D	D	D	D	D	D	D						
	0.039μF (393)													
	0.047μF (473)													

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

NP0 Dielectric 1825 to 2225 Sizes

DIELECTRIC		NP0																			
SIZE		1825						2220						2225							
RATED VOLTAGE (VDC)		100	200 250	500 630	1000	2000	3000	100	200 250	500	630	1000	2000	3000	100	200 250	500	630	1000	2000	3000
Capacitance	10pF (100)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	12pF (120)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	15pF (150)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	18pF (180)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	22pF (220)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	27pF (270)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	33pF (330)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	39pF (390)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	47pF (470)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	56pF (560)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	68pF (680)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	82pF (820)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	100pF (101)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	120pF (121)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	150pF (151)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	180pF (181)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	220pF (221)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	270pF (271)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	330pF (331)	K	K	K	K	K	K	K	K	K	K	K	K	M	K	K	K	K	K	K	K
	390pF (391)	K	K	K	K	K	K	K	K	K	K	K	K	M	K	K	K	K	K	K	K
	470pF (471)	K	K	K	K	K	K	K	K	K	K	K	K	M	K	K	K	K	K	K	K
	560pF (561)	K	K	K	K	K	K	K	K	K	K	K	K	M	K	K	K	K	K	K	K
	680pF (681)	K	K	K	K	K	M	K	K	K	K	K	K	M	K	K	K	K	K	K	K
	820pF (821)	K	K	K	K	K	M	K	K	K	K	K	K	M	K	K	K	K	K	M	M
	1,000pF (102)	K	K	K	K	K	M	K	K	K	K	K	K	M	K	K	K	K	K	M	M
	1,200pF (122)	K	K	K	K	K		K	K	K	K	M	M	M	K	K	K	K	K	M	
	1,500pF (152)	K	K	K	K	M		K	K	K	K	M	M	M	K	K	K	K	K	M	
	1,800pF (182)	K	K	K	K	M		K	K	K	K	M	M		K	K	K	K	K	M	
	2,200pF (222)	K	K	K	K	M		K	K	K	K	M	M		K	K	K	K	K	M	
	2,700pF (272)	K	K	K	K	M		K	K	K	K	M	M		K	K	K	K	K	M	
	3,300pF (332)	K	K	K	K	M		K	K	K	K	M	M		K	K	K	K	K	M	
	3,900pF (392)	K	K	K	M	M		K	K	K	K	M	M		K	K	K	K	K	M	
	4,700pF (472)	K	K	K	M	M		K	K	K	K	M	M		K	K	K	K	K	M	
	5,600pF (562)	K	K	K	M			K	K	K	K	M			K	K	K	K	M	M	
	6,800pF (682)	K	K	K	M			K	K	K	K	M			K	K	K	K	M	M	
	8,200pF (822)	K	K	K	M			K	K	K	K	M			K	K	K	K	M	M	
	0.010uF (103)	K	K	K	M			K	K	K	K	M			K	K	K	K	M	M	
	0.012uF (123)	K	K	K				K	K	K	K				K	K	K	K			
	0.015uF (153)	K	K	K				K	K	K	K				K	K	K	K			
	0.018uF (183)	K	K	K				K	K	K	K				K	K	K	K			
0.022uF (223)	K	K	K				K	K	K	K				K	K	K	K				
0.027uF (273)	K	K	K				K	K	K					K	K	K	K				
0.033uF (333)	K	K	K				K	K	K					K	K	K	K				
0.039uF (393)	K	K	M				K	K	M					K	K	K	K				
0.047uF (473)	K	K					K	M	M					K	K	K	K				
0.056uF (563)	K	M					K	M						K	M	M	M				
0.068uF (683)	K	M					K	M						K	M	M	M				
0.082uF (823)	M						M							K	M	M					
0.1uF (104)	M						M							M	M						
0.12uF (124)																					
0.15uF (154)																					
0.18uF (184)																					
0.22uF (224)																					
0.27uF (274)																					

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

7-1. CAPACITANCE RANGE (X7R Dielectric)

0402, 0603 Sizes

DIELECTRIC		X7R											
SIZE		0402					0603						
RATED VOLTAGE (VDC)		10	16	25	50	100	10	16	25	50	100	200	250
Capacitance	100pF (101)	E	E	E	E	E	S	S	S	S	S	X	X
	120pF (121)	E	E	E	E	E	S	S	S	S	S	X	X
	150pF (151)	E	E	E	E	E	S	S	S	S	S	X	X
	180pF (181)	E	E	E	E	E	S	S	S	S	S	X	X
	220pF (221)	E	E	E	E	E	S	S	S	S	S	X	X
	270pF (271)	E	E	E	E	E	S	S	S	S	S	X	X
	330pF (331)	E	E	E	E	E	S	S	S	S	S	X	X
	390pF (391)	E	E	E	E	E	S	S	S	S	S	X	X
	470pF (471)	E	E	E	E	E	S	S	S	S	S	X	X
	560pF (561)	E	E	E	E	E	S	S	S	S	S	X	X
	680pF (681)	E	E	E	E	E	S	S	S	S	S	X	X
	820pF (821)	E	E	E	E	E	S	S	S	S	S	X	X
	1,000pF (102)	E	E	E	E	E	S	S	S	S	S	X	X
	1,200pF (122)	E	E	E	E	E	S	S	S	S	S	X	X
	1,500pF (152)	E	E	E	E	E	S	S	S	S	S	X	X
	1,800pF (182)	E	E	E	E	E	S	S	S	S	S	X	X
	2,200pF (222)	E	E	E	E	E	S	S	S	S	S	X	X
	2,700pF (272)	E	E	E	E	E	S	S	S	S	S	X	X
	3,300pF (332)	E	E	E	E	E	S	S	S	S	S	X	X
	3,900pF (392)	E	E	E	E	E	S	S	S	S	S	X	X
	4,700pF (472)	E	E	E	E	E	S	S	S	S	S	X	X
	5,600pF (562)	E	E	E	E	E	S	S	S	S	S	X	X
	6,800pF (682)	E	E	E	E	E	S	S	S	S	S	X	X
	8,200pF (822)	E	E	E	E	E	S	S	S	S	S	X	X
	0.010μF (103)	E	E	E	E	E	S	S	S	S	S	X	X
	0.012μF (123)	E	E	E	E	E	S	S	S	S	S	X	
	0.015μF (153)	E	E	E	E	E	S	S	S	S	S	X	
	0.018μF (183)	E	E	E	E	E	S	S	S	S	S	X	
	0.022μF (223)	E	E	E	E	E	S	S	S	S	S	X	
	0.027μF (273)	E	E	E	E	E	S	S	S	S	S	X	
	0.033μF (333)	E	E	E	E	E	S	S	S	X	X		
	0.039μF (393)	E	E	E	E	E	S	S	S	X	X		
	0.047μF (473)	E	E	E	E	E	S	S	S	X	X		
	0.056μF (563)	E	E				S	S	S	X	X		
	0.068μF (683)	E	E				S	S	S	X	X		
	0.082μF (823)	E	E				S	S	S	X	X		
	0.10μF (104)	E	E				S	S	S	X	X		
	0.12μF (124)						S	S	X				
	0.15μF (154)						S	S	X				
	0.18μF (184)						S	S	X				
	0.22μF (224)						S	S	X	X			
	0.27μF (274)						X	X	X				
	0.33μF (334)						X	X	X				
	0.39μF (394)						X	X	X				
	0.47μF (474)						X	X	X				
	0.56μF (564)						X	X					
	0.68μF (684)						X	X					
	0.82μF (824)						X	X					
	1.0μF (105)						X	X	X				
	1.5μF (155)												
	2.2μF (225)												
	4.7μF (475)												

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

X7R Dielectric 0805 Size

DIELECTRIC		X7R									
SIZE		0805									
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	1000
Capacitance	100pF (101)	D	D	D	D	D	D	D	B	B	B
	120pF (121)	D	D	D	D	D	D	D	B	B	B
	150pF (151)	D	D	D	D	D	D	D	B	B	B
	180pF (181)	D	D	D	D	D	D	D	B	B	B
	220pF (221)	D	D	D	D	D	D	D	B	B	B
	270pF (271)	D	D	D	D	D	D	D	B	B	B
	330pF (331)	D	D	D	D	D	D	D	B	B	B
	390pF (391)	D	D	D	D	D	D	D	B	B	B
	470pF (471)	D	D	D	D	D	D	D	B	B	B
	560pF (561)	D	D	D	D	D	D	D	B	B	B
	680pF (681)	D	D	D	D	D	D	D	B	B	B
	820pF (821)	D	D	D	D	D	D	D	B	B	B
	1,000pF (102)	D	D	D	D	D	D	D	B	B	B
	1,200pF (122)	D	D	D	D	D	D	D	B	B	B
	1,500pF (152)	D	D	D	D	D	D	D	B	B	D
	1,800pF (182)	D	D	D	D	D	D	D	B	B	D
	2,200pF (222)	D	D	D	D	D	D	D	B	B	D
	2,700pF (272)	D	D	D	D	D	D	D	B	B	
	3,300pF (332)	D	D	D	D	D	D	D	B	B	
	3,900pF (392)	D	D	D	D	D	D	D	B	B	
	4,700pF (472)	D	D	D	D	D	D	D	D	D	
	5,600pF (562)	D	D	D	D	D	D	D	D	D	
	6,800pF (682)	D	D	D	D	D	D	D	D	D	
	8,200pF (822)	D	D	D	D	D	D	D	D	D	
	0.010μF (103)	D	D	D	D	D	D	D	D	D	
	0.012μF (123)	D	D	D	D	D	D	D	D	D	
	0.015μF (153)	D	D	D	D	D	D	D	D	D	
	0.018μF (183)	D	D	D	D	D	D	D	D	D	
	0.022μF (223)	D	D	D	D	D	D	D	D	D	
	0.027μF (273)	D	D	D	D	D	D	D	D	D	
	0.033μF (333)	D	D	D	D	D	D	D	D		
	0.039μF (393)	D	D	D	D	D	D	D			
	0.047μF (473)	D	D	D	D	D	D	D			
	0.056μF (563)	D	D	D	D	D	D	D			
	0.068μF (683)	D	D	D	D	D	D	D			
	0.082μF (823)	D	D	D	D	D	D				
	0.10μF (104)	D	D	D	D	D	D				
	0.12μF (124)	D	D	D	D	I					
	0.15μF (154)	D	D	D	D	I					
	0.18μF (184)	D	D	D	D	I					
	0.22μF (224)	D	D	D	D	I					
	0.27μF (274)	I	I	I	I						
	0.33μF (334)	I	I	I	I						
	0.39μF (394)	I	I	I	I						
	0.47μF (474)	I	I	I	I						
	0.56μF (564)	I	I	I							
	0.68μF (684)	I	I	I							
	0.82μF (824)	I	I	I							
	1.0μF (105)	I	I	I	I						
	1.5μF (155)	I	I	I							
	2.2μF (225)	I	I	I							
	4.7μF (475)		I								
	10μF (106)										

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

X7R Dielectric 1206 Size

DIELECTRIC		X7R													
SIZE		1206													
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	400	450	500	630	1000	1500	2000
Capacitance	100pF (101)						D	D			D	D	D	D	D
	120pF (121)						D	D			D	D	D	D	D
	150pF (151)	D	D	D	D	D	D	D			D	D	D	D	D
	180pF (181)	D	D	D	D	D	D	D			D	D	D	D	D
	220pF (221)	D	D	D	D	D	D	D			D	D	D	D	D
	270pF (271)	D	D	D	D	D	D	D			D	D	D	D	D
	330pF (331)	D	D	D	D	D	D	D			D	D	D	D	D
	390pF (391)	D	D	D	D	D	D	D			D	D	D	D	D
	470pF (471)	D	D	D	D	D	D	D			D	D	D	D	D
	560pF (561)	D	D	D	D	D	D	D			D	D	D	D	D
	680pF (681)	D	D	D	D	D	D	D			D	D	D	D	D
	820pF (821)	D	D	D	D	D	D	D			D	D	D	G	G
	1,000pF (102)	D	D	D	D	D	D	D			D	D	D	G	G
	1,200pF (122)	D	D	D	D	D	D	D			D	D	D	G	G
	1,500pF (152)	D	D	D	D	D	D	D			D	D	D	G	G
	1,800pF (182)	D	D	D	D	D	D	D			D	D	D	G	G
	2,200pF (222)	D	D	D	D	D	D	D			D	D	D	G	G
	2,700pF (272)	D	D	D	D	D	D	D			D	D	D	G	G
	3,300pF (332)	D	D	D	D	D	D	D			D	D	D	G	G
	3,900pF (392)	D	D	D	D	D	D	D			D	D	D	G	
	4,700pF (472)	D	D	D	D	D	D	D			D	D	D	G	
	5,600pF (562)	D	D	D	D	D	D	D			D	D	D	G	
	6,800pF (682)	D	D	D	D	D	D	D			D	D	D	G	
	8,200pF (822)	D	D	D	D	D	D	D			D	D	D	G	
	0.010μF (103)	D	D	D	D	D	D	D			D	D	D	G	
	0.012μF (123)	D	D	D	D	D	D	D			D	D	G		
	0.015μF (153)	D	D	D	D	D	D	D			D	D	G		
	0.018μF (183)	D	D	D	D	D	D	D			D	D			
	0.022μF (223)	D	D	D	D	D	D	D			G	G			
	0.027μF (273)	D	D	D	D	D	D	D			G	G			
	0.033μF (333)	D	D	D	D	D	G	G			G	G			
	0.039μF (393)	D	D	D	D	D	G	G			G	G			
	0.047μF (473)	D	D	D	D	D	G	G			G	G			
	0.056μF (563)	D	D	D	D	D	G	G			G	G			
	0.068μF (683)	D	D	D	D	D	G	G	G	G					
	0.082μF (823)	D	D	D	D	D	G	G	G	G					
	0.10μF (104)	D	D	D	D	D	G	G	G	G					
	0.12μF (124)	D	D	D	D	D									
	0.15μF (154)	C	C	C	C	G									
	0.18μF (184)	C	C	C	C	G									
	0.22μF (224)	C	C	C	C	G									
	0.27μF (274)	C	C	C	D	G									
	0.33μF (334)	C	C	C	D	G									
	0.39μF (394)	C	C	J	P	G									
	0.47μF (474)	J	J	J	P	G									
	0.56μF (564)	J	J	J	P	P									
	0.68μF (684)	J	J	J	P	P									
	0.82μF (824)	J	J	J	P	P									
	1.0μF (105)	J	J	J	P	P									
	1.5μF (155)	J	J	P											
	2.2μF (225)	J	J	P	P										
	3.3μF (335)	P	P	P											
	4.7μF (475)	P	P	P											
	10μF (106)	P	P	P											
	22μF (226)	P													
	47μF (476)														

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

Approval Sheet

X7R Dielectric 1210 Size

DIELECTRIC		X7R														
SIZE		1210														
RATED VOLTAGE (VDC)		6.3	10	16	25	50	100	200	250	400	450	500	630	1000	1500	2000
Capacitance	100pF (101)											D	D	D	D	D
	120pF (121)											D	D	D	D	D
	150pF (151)											D	D	D	D	D
	180pF (181)											D	D	D	D	D
	220pF (221)											D	D	D	D	D
	270pF (271)											D	D	D	D	D
	330pF (331)											D	D	D	D	D
	390pF (391)											D	D	D	D	D
	470pF (471)											D	D	D	D	D
	560pF (561)											D	D	D	D	D
	680pF (681)											D	D	D	D	D
	820pF (821)											D	D	D	D	D
	1,000pF (102)		C	C	C	C	C	C	C	C		D	D	D	D	D
	1,200pF (122)		C	C	C	C	C	C	C	C		D	D	D	M	M
	1,500pF (152)		C	C	C	C	C	C	C	C		D	D	D	M	M
	1,800pF (182)		C	C	C	C	C	C	C	C		D	D	D	M	M
	2,200pF (222)		C	C	C	C	C	C	C	C		D	D	D	M	M
	2,700pF (272)		C	C	C	C	C	C	C	C		D	D	D	M	M
	3,300pF (332)		C	C	C	C	C	C	C	C		D	D	D	M	M
	3,900pF (392)		C	C	C	C	C	C	C	C		D	D	G	M	M
	4,700pF (472)		C	C	C	C	C	C	C	C		D	D	G	M	M
	5,600pF (562)		C	C	C	C	C	C	C	C		D	D	G	M	M
	6,800pF (682)		C	C	C	C	C	C	C	C		D	D	G	M	M
	8,200pF (822)		C	C	C	C	C	C	C	C		D	D	G	M	M
	0.010μF (103)		C	C	C	C	C	C	C	C		D	D	G		
	0.012μF (123)		C	C	C	C	C	C	C	C		D	D	G		
	0.015μF (153)		C	C	C	C	C	C	C	C		D	D	G		
	0.018μF (183)		C	C	C	C	C	C	C	C		D	D	G		
	0.022μF (223)		C	C	C	C	C	C	C	C		D	D	G		
	0.027μF (273)		C	C	C	C	C	C	C	C		G	G	G		
	0.033μF (333)		C	C	C	C	C	C	C	C		G	G	G		
	0.039μF (393)		C	C	C	C	C	C	C	C		G	G	K		
	0.047μF (473)		C	C	C	C	C	D	D	D		G	G	M		
	0.056μF (563)		C	C	C	C	C	D	D	D		G	G			
	0.068μF (683)		C	C	C	C	C	G	G	G		K	K			
	0.082μF (823)		C	C	C	C	C	G	G	G		K	K			
	0.10μF (104)		C	C	C	C	C	G	G	G		K	K			
	0.12μF (124)		C	C	C	C	C	G	G	M	M					
	0.15μF (154)		C	C	C	C	D	M	M	M	M					
	0.18μF (184)		C	C	C	C	D	M	M	M	M					
	0.22μF (224)		C	C	C	C	D	M	M	M	M					
	0.27μF (274)		C	C	C	C	G	M	M	M	M					
	0.33μF (334)		C	C	C	D	G	M	M	M	M					
	0.39μF (394)		C	C	C	D	M	M	M	M						
	0.47μF (474)		C	C	C	D	M	M	M	M						
	0.56μF (564)		D	D	D	D	M	M	M	M						
0.68μF (684)		D	D	D	D	K	M	M	M							
0.82μF (824)		D	D	D	D	K										
1.0μF (105)		D	D	D	D	K										
1.5μF (155)				K	G	M	M									
2.2μF (225)				K	G	M	M									
3.3μF (335)				K	G	M										
4.7μF (475)		K	K	K	K											
10μF (106)		K	K	M	M											
22μF (226)			M													
47μF (476)	M															

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

X7R Dielectric 1808, 1812 Sizes

DIELECTRIC		X7R																			
SIZE		1808						1812													
RATED VOLTAGE (VDC)		500	630	1000	1500	2000	3000	10	16	25	50	100	200	250	500	630	1000	1500	2000	3000	
Capacitance	100pF (101)																				
	120pF (121)																				
	150pF (151)	D	D	D	D	D	D														
	180pF (181)	D	D	D	D	D	D														
	220pF (221)	D	D	D	D	D	D														
	270pF (271)	D	D	D	D	D	D						D	D	D	D	D	D	D	K	
	330pF (331)	D	D	D	D	D	K						D	D	D	D	D	D	D	K	
	390pF (391)	D	D	D	D	D	K						D	D	D	D	D	D	D	K	
	470pF (471)	D	D	D	D	D	K						D	D	D	D	D	D	D	K	
	560pF (561)	D	D	D	D	D	K						D	D	D	D	D	D	D	K	
	680pF (681)	D	D	D	D	D	K						D	D	D	D	D	D	D	K	
	820pF (821)	D	D	D	D	D	K						D	D	D	D	D	D	D	K	
	1,000pF (102)	D	D	D	K	K	K	D	D	D	D	D	D	D	D	D	D	D	D	K	
	1,200pF (122)	D	D	D	K	K	K	D	D	D	D	D	D	D	D	D	D	D	D	K	
	1,500pF (152)	D	D	D	K	K	K	D	D	D	D	D	D	D	D	D	D	D	D	K	
	1,800pF (182)	D	D	D	K	K	K	D	D	D	D	D	D	D	D	D	D	D	G	G	M
	2,200pF (222)	D	D	D	K	K		D	D	D	D	D	D	D	D	D	D	D	G	G	M
	2,700pF (272)	D	D	D	K	K		D	D	D	D	D	D	D	D	D	D	D	G	G	M
	3,300pF (332)	D	D	D	K	K		D	D	D	D	D	D	D	D	D	D	D	K	K	M
	3,900pF (392)	D	D	D	K	K		D	D	D	D	D	D	D	D	D	D	D	K	K	M
	4,700pF (472)	D	D	D	K	K		D	D	D	D	D	D	D	D	D	D	D	K	K	M
	5,600pF (562)	K	K	K	K	K		D	D	D	D	D	D	D	D	D	D	D	M	M	M
	6,800pF (682)	K	K	K	K	K		D	D	D	D	D	D	D	D	D	D	D	M	M	M
	8,200pF (822)	K	K	K				D	D	D	D	D	D	D	D	D	D	D	M	M	
	0.010μF (103)	K	K	K				D	D	D	D	D	D	D	D	D	D	D	M	M	
	0.012μF (123)	K	K	K				D	D	D	D	D	D	D	D	D	D	K			
	0.015μF (153)	K	K	K				D	D	D	D	D	D	D	D	D	D	K			
	0.018μF (183)	K	K	K				D	D	D	D	D	D	D	D	D	D	M			
	0.022μF (223)	K	K	K				D	D	D	D	D	D	D	D	D	D	M			
	0.027μF (273)	K	K	K				D	D	D	D	D	D	D	D	D	D	M			
	0.033μF (333)	K	K	K				D	D	D	D	D	D	D	D	D	D	M			
	0.039μF (393)	K	K	K				D	D	D	D	D	D	D	D	D	D	M			
	0.047μF (473)	K	K	K				D	D	D	D	D	D	D	D	D	D	M			
	0.056μF (563)	K	K	K				D	D	D	D	D	D	D	D	K	K	M			
	0.068μF (683)	K	K					D	D	D	D	D	D	D	D	K	K	M			
	0.082μF (823)	K	K					D	D	D	D	D	D	D	D	K	K	M			
	0.10μF (104)							D	D	D	D	D	D	D	D	K	K	M			
	0.12μF (124)							D	D	D	D	D	D	D	D	M	M				
	0.15μF (154)							D	D	D	D	D	K	K	M	M					
	0.18μF (184)							D	D	D	D	D	K	K	M	M					
	0.22μF (224)							D	D	D	D	D	K	K	M	M					
	0.27μF (274)							D	D	D	D	D	K	K	M						
	0.33μF (334)							D	D	D	D	D	K	K	M						
	0.39μF (394)							D	D	D	D	D	K	K	M						
	0.47μF (474)							D	D	D	D	K	K	K	M						
	0.56μF (564)							D	D	D	D	K	M	M							
	0.68μF (684)							D	D	D	K	K	M	M							
0.82μF (824)							D	D	D	K	K	M	M								
1.0μF (105)							D	D	D	K	K	M	M								
1.5μF (155)											K										
2.2μF (225)										M	M										
3.3μF (335)																					
4.7μF (475)																					

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

X7R Dielectric 1825 to 2225 Sizes

DIELECTRIC		X7R																				
SIZE		1825						2220										2225				
RATED VOLTAGE		250	500	630	1000	2000	3000	25	50	100	250	500	630	1000	2000	3000	500	630	1000	2000	3000	
Capacitance	1,000pF (102)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
	1,200pF (122)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
	1,500pF (152)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
	1,800pF (182)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
	2,200pF (222)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
	2,700pF (272)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
	3,300pF (332)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
	3,900pF (392)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
	4,700pF (472)	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
	5,600pF (562)	K	K	K	K	K	M	K	K	K	K	K	K	K	K	K	K	K	K	K	M	
	6,800pF (682)	K	K	K	K	K	M	K	K	K	K	K	K	K	K	M	K	K	K	K	M	
	8,200pF (822)	K	K	K	K	K	M	K	K	K	K	K	K	K	M	M	K	K	K	K	M	
	0.010μF (103)	K	K	K	K	K	M	K	K	K	K	K	K	K	M	M	K	K	K	K	M	
	0.012μF (123)	K	K	K	K	M	U	K	K	K	K	K	K	K	M	U	K	K	K	M	M	
	0.015μF (153)	K	K	K	K	M	U	K	K	K	K	K	K	K	M	U	K	K	K	M	M	
	0.018μF (183)	K	K	K	K	M	U	K	K	K	K	K	K	K	U	U	K	K	K	M	U	
	0.022μF (223)	K	K	K	K	M		K	K	K	K	K	K	K	U		K	K	K	M		
	0.027μF (273)	K	K	K	K	U		K	K	K	K	K	K	K	U		K	K	K	M		
	0.033μF (333)	K	K	K	K	U		K	K	K	K	K	K	K	U		K	K	K	M		
	0.039μF (393)	K	K	K	K	U		K	K	K	K	K	K	K	U		K	K	K	U		
	0.047μF (473)	K	K	K	K	U		K	K	K	K	K	K	K	U		K	K	K	U		
	0.056μF (563)	K	K	K	K			K	K	K	K	K	K	K	U		K	K	K	U		
	0.068μF (683)	K	K	K	K			K	K	K	K	K	K	M			K	K	K			
	0.082μF (823)	K	K	K	M			K	K	K	K	K	K	M			K	K	K			
	0.10μF (104)	K	K	K	M			K	K	K	K	K	K	M			K	K	K			
	0.12μF (124)	K	K	K				K	K	K	K	K	K	M			K	K	U			
	0.15μF (154)	K	K	K				K	K	K	K	K	K	U			K	K	U			
	0.18μF (184)	K	K	K				K	K	K	K	K	K	U			K	K	U			
	0.22μF (224)	K	K	K				K	K	K	K	K	K	U			K	K	U			
	0.27μF (274)	K	K	K				K	K	K	K	K	K				K	K				
	0.33μF (334)	K	K	K				K	K	K	K	K	K				K	K				
	0.39μF (394)	K	K	K				K	K	K	K	K	K				K	K				
	0.47μF (474)	K	K	K				K	K	K	K	K	K				K	K				
	0.56μF (564)	K	M	M				K	K	K	K	M	M				K	K				
	0.68μF (684)	K						K	K	K	K	M	M									
	0.82μF (824)	K						K	K	K	K	U	U									
1.0μF (105)	K						K	K	K	K	U	U										
1.5μF (155)							K	K	K	M												
2.2μF (225)							K	K	K	M												
3.3μF (335)								K	K													
4.7μF (475)								K	M													
6.8μF (685)								M	U													
10μF (106)								U	U													

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

7-2. CAPACITANCE RANGE (X5R Dielectric)

Dielectric		X5R																							
Size		0402				0603					0805					1206					1210				
Rated Voltage (VDC)		6.3	10	16	25	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Capacitance	0.027μF (273)			E																					
	0.033μF (333)			E																					
	0.039μF (393)			E																					
	0.047μF (473)			E																					
	0.056μF (563)		E	E																					
	0.068μF (683)		E	E																					
	0.082μF (823)	E	E	E																					
	0.10μF (104)	E	E	E	E																				
	0.15μF (154)	E	E	E	E																				
	0.22μF (224)	E	E	E	E			X	X																
	0.27uF (274)						X	X	X																
	0.33μF (334)	E	E			X	X	X	X																
	0.39μF (394)						X	X	X																
	0.47μF (474)	E	E				X	X	X																
	0.68μF (684)	E	E			X	X	X	X																
	0.82uF (824)					X	X	X																	
	1.0μF (105)					X	X	X	X																
	1.5μF (155)					X					I	I	I	I			J	J				K	K		
	2.2μF (225)					X	X	X			I	I	I	I			J	J	P			K	K		
	3.3μF (335)					X					I	I	I	I			P	P	P						
	4.7μF (475)					X										P	P	P	P			K	K	K	
	6.8uF (685)															P	P								
	10μF (106)															P	P	P	P		K	K	K		
	22μF (226)																								

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

7-3. CAPACITANCE RANGE (Y5V Dielectric)

DIELECTRIC		Y5V								
SIZE		0402					0603			
RATED VOLTAGE		6.3	10	16	25	50	10	16	25	50
Capacitance	0.010μF (103)		E	E	E	E	S	S	S	S
	0.015μF (153)		E	E	E	E	S	S	S	S
	0.022μF (223)		E	E	E	E	S	S	S	S
	0.033μF (333)		E	E	E	E	S	S	S	S
	0.047μF (473)		E	E	E		S	S	S	S
	0.068μF (683)		E	E	E		S	S	S	S
	0.10μF (104)		E	E	E		S	S	S	S
	0.15μF (154)		E				S	S	S	S
	0.22μF (224)	E	E				S	S	S	S
	0.33μF (334)	E	E				S	S	S	
	0.47μF (474)						S	S		
	0.68μF (684)						S	X		
	1.0μF (105)						S	X		
	2.2μF (225)						S			
4.7μF (475)										

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

8. PACKAGING STYLE AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0402 (1005)	0.50±0.20	E	10k	-	-	-
0603 (1608)	0.80±0.07	S	4k	15k	-	-
	0.80±0.30	X	4k	15k	-	-
0805 (2012)	0.60±0.10	A	4k	15k	-	-
	0.80±0.10	B	4k	15k	-	-
	1.25±0.10	D	-	-	3k	10k
	1.25±0.30	I	-	-	3k	10k
1206 (3216)	0.80±0.10	B	4k	15k	-	-
	0.95±0.10	C	-	-	3k	10k
	1.15±0.15	J	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	10k
	1.60±0.50	P	-	-	2k	9k
1210 (3225)	0.95±0.10	C	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	-
	2.00±0.20	K	-	-	1k	6k
	2.50±0.50	M	-	-	1k	6k
1812 (4532)	1.25±0.10	D	-	-	1k	5k
	1.60±0.20	G	-	-	1k	-
	2.00±0.20	K	-	-	1k	-
	2.50±0.50	M	-	-	0.5k	3k
1825 (4563)	2.00±0.20	K	-	-	1k	-
2220 (5750)	2.50±0.30	M	-	-	0.5k	-
2225 (5763)	2.80±0.30	U	-	-	0.5k	-

Unit: pieces



Multilayer Ceramic Capacitors

9. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements			
1.	Visual and Mechanical	---	* No remarkable defect. * Dimensions to conform to individual specification sheet.			
2.	Capacitance	Class I: (NP0) C ≤ 1000pF, 1.0±0.2Vrms · 1MHz±10% C > 1000pF, 1.0±0.2Vrms · 1KHz±10% Class II: (X7R, X7E, X6S, X5R,X7S,Y5V) C ≤ 10μF, 1.0±0.2Vrms · 1KHz±10% ** C > 10μF, 0.5±0.2Vrms · 120Hz±20%	* Shall not exceed the limits given in the detailed spec. NP0: Cap≥30pF, Q≥1000; Cap<30pF,Q≥400+20C X7R,X5R,X6S,X7S:			
3.	Q/ D.F. (Dissipation Factor)	** Test condition: 0.5±0.2Vrms · 1KHz±10% X7R: 0805=106(6.3V), 0603/475(6.3V) X5R: 0201 ≥ 224 (6.3V,10V,16V) ^{#1} , 0402 ≥ 475 (6.3V,16V), 0402 ≥ 225(10V), 0603=106 (6.3V,10V), TT18X ≥ 475(10V) , TT15X series X6S: 0201/474(4V),0201 ≥ 104 (6.3V,10V ^{#1}), 0402 ≥ 225 (6.3V), 0402/475 (10V), 0603/106 (6.3V), X7S: 0402/225(6.3V) #1 Excluding X5R/0201/105(6.3V);225(10V), X6S/0201/104(10V) (1.0±0.2Vrms · 1KHz±10%) *Before initial measurement (Class II only): To apply de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.	Rated vol.	D.F. ≤	Exception of D.F. ≤	
			≥ 100V	≤ 2.5%	≤ 3%	1206 ≥ 0.47μF
					≤ 5%	0805 > 0.1μF;0603 ≥ 0.068μF;1206>1μF;1210 ≥ 2.2μF;TT series
					≤ 10%	0805 > 0.22μF;1210 ≥ 3.3μF
			50V	≤ 2.5%	≤ 3%	0201(50V);0603 ≥ 0.047μF;0805 ≥ 0.18μF;1206 ≥ 0.47μF
					≤ 5%	0201 ≥ 0.01uF;1210 ≥ 4.7μF
					≤ 10%	0402 ≥ 0.012μF; 0603>0.1μF; 0805 ≥ 1μF(0805/X7R>0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series
			35V	≤ 3.5%	≤ 10%	0603 ≥ 1μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF
					≤ 5%	0201 ≥ 0.01μF;0805 ≥ 1μF;1210 ≥ 10μF
			25V	≤ 3.5%	≤ 7%	0603 ≥ 0.33μF
					≤ 10%	0201 ≥ 0.1μF;0402 ≥ 0.10μF&(0402/X7R ≥ 0.056μF);TT series; 0603 ≥ 0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF
					≤ 12.5%	0402 ≥ 0.47μF
			16V	≤ 3.5%	≤ 5%	0201 ≥ 0.01μF;0402 ≥ 0.033μF;0603 ≥ 0.15μF; 0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF
					≤ 10%	0201 ≥ 0.1uF(0201/X7R ≥ 0.022μF);0402 ≥ 0.22uF;TT series 0603 ≥ 0.68μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF
			10V	≤ 5%	≤ 10%	0201 ≥ 0.012μF;0402 ≥ 0.33μF(0402/X7R ≥ 0.22μF);TT series 0603 ≥ 0.33μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF;01R5
					≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF
			6.3V	≤ 10%	≤ 15%	0201 ≥ 0.1μF;0402 ≥ 1μF(0402/X6S ≥ 0.47μF);0603 ≥ 10μF; 0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF;TT series
					≤ 20%	0402 ≥ 2.2μF
			4V	≤ 15%	---	---
						Y5V:
≥ 50V	≤ 5%	≤ 7%				0603 ≥ 0.1μF; 0805 ≥ 0.47μF; 1206 ≥ 4.7μF; TT series
		≤ 12.5%				1210 ≥ 6.8μF
35V	≤ 7%	---				---
		≤ 7%				0402 ≥ 0.047μF;0603 ≥ 0.1μF; 0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF
25V	≤ 5%	≤ 9%				0402 ≥ 0.068μF;0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series
		≤ 9%				0402 ≥ 0.068μF; 0603 ≥ 0.68μF
16V (C<1.0μF)	≤ 7%	≤ 12.5%				0402 ≥ 0.22μF
		≤ 12.5%				0603 ≥ 2.2μF; 0805 ≥ 3.3μF;1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF; TT series
10V	≤ 12.5%	≤ 20%				0402 ≥ 0.47μF
6.3V	≤ 20%	---	---			
4.	Dielectric Strength	*To apply voltage: ≤ 100V: 250% of rated voltage. 200V ~ 300V: 200% of rated voltage. 400V ~ 450V: 120% of rated voltage. 500V ~ 999V: 150% of rated voltage. 1000V ~ 3000V: 120% of rated voltage. 4000V: 110% of rated voltage. *Duration: 1 to 5 sec. *Charge & discharge current less than 50mA.	* No evidence of damage or flash over during test.			

No.	Item	Test Condition	Requirements
5.	Insulation Resistance	To apply rated voltage for MAX. 120sec.	10GΩ or $RxC \geq 500\Omega \cdot F$ whichever is smaller. Class II (X7R, X7E, X5R, X6S, X7S, Y5V:)
			Rated voltage
			100V: All X7R
			50V: 0402 $\geq 0.01\mu F$; 0603 $\geq 1\mu F$; 0805 $\geq 1\mu F$; 1206 $\geq 4.7\mu F$; 1210 $\geq 4.7\mu F$
			35V: 0805 $\geq 2.2\mu F$; 1206 $\geq 2.2\mu F$; 1210 $\geq 10\mu F$
			25V: 0402 $\geq 1\mu F$; 0603 $\geq 2.2\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 10\mu F$; 1210 $\geq 10\mu F$
			16V: 0201 $\geq 0.1\mu F$; 0402 $\geq 0.22\mu F$; 0603 $\geq 1\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 10\mu F$; 1210 $\geq 47\mu F$
			10V: 0201 $\geq 47nF$; 0402 $\geq 0.47\mu F$; 0603 $\geq 0.47\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 4.7\mu F$; 1210 $\geq 47\mu F$
			6.3V ; 4V ; TT series; Size ≥ 1812
			Insulation Resistance
			Rated voltage
			All X6S items, All X7S items
			100V: 1210 $\geq 3.3\mu F$
			50V: 0402 $\geq 0.1\mu F$; 0603 $\geq 2.2\mu F$; 0805 $\geq 10\mu F$; 1206 $\geq 10\mu F$
			35V: 0603 $\geq 1\mu F$;
			25V: 0201 $\geq 0.1\mu F$; 0402 $\geq 2.2\mu F$; 0603 $\geq 10\mu F$; 0805 $\geq 10\mu F$; 1206 $\geq 22\mu F$
			16V: 0603 $\geq 10\mu F$; 0402 $\geq 1\mu F$; 0201 $\geq 0.22\mu F$
			10V: 0201 $\geq 0.1\mu F$; 0402 $\geq 1\mu F$; 0603 $\geq 10\mu F$; 0805 $\geq 47\mu F$; TT21 $\geq 4.7\mu F$
			6.3V: 0201 $\geq 0.1\mu F$; 0402 $\geq 1\mu F$; 0603 $\geq 4.7\mu F$; 0805 $\geq 47\mu F$; 1206 $\geq 10\mu F$;
			4V: 0603 $\geq 22\mu F$; 0805 $\geq 47\mu F$; 1206 $\geq 100\mu F$
			Insulation Resistance
			$RxC \geq 50 \Omega \cdot F$.
	Rated voltage: 200~630V	To apply rated voltage (500V max.) for 60 sec.	$\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$ whichever is smaller
	Rated voltage: >630V	To apply 500V for 60 sec.	



No.	Item	Test Condition	Requirements																												
6.	Temperature Coefficient	With no electrical load.																													
		<table><tr><th>T.C.</th><th>Operating Temp</th></tr><tr><td>NPO</td><td>-55~125℃ at 25℃</td></tr><tr><td>X7R</td><td>-55~125℃ at 25℃</td></tr><tr><td>X7S</td><td>-55 ~ 125℃ at 25℃</td></tr><tr><td>X5R</td><td>-55~ 85℃ at 25℃</td></tr><tr><td>X6S</td><td>-55~105℃ at 25℃</td></tr><tr><td>Y5V</td><td>-25~ 85℃ at 20℃</td></tr></table>	T.C.	Operating Temp	NPO	-55~125℃ at 25℃	X7R	-55~125℃ at 25℃	X7S	-55 ~ 125℃ at 25℃	X5R	-55~ 85℃ at 25℃	X6S	-55~105℃ at 25℃	Y5V	-25~ 85℃ at 20℃	<table><tr><th>T.C.</th><th>Capacitance Change</th></tr><tr><td>NPO</td><td>Within ±30ppm/℃</td></tr><tr><td>X7R</td><td>Within ±15%</td></tr><tr><td>X7S</td><td>Within ±22%</td></tr><tr><td>X5R</td><td>Within ±15%</td></tr><tr><td>X6S</td><td>Within ±22%</td></tr><tr><td>Y5V</td><td>Within +30%/-80%</td></tr></table>	T.C.	Capacitance Change	NPO	Within ±30ppm/℃	X7R	Within ±15%	X7S	Within ±22%	X5R	Within ±15%	X6S	Within ±22%	Y5V	Within +30%/-80%
		T.C.	Operating Temp																												
		NPO	-55~125℃ at 25℃																												
		X7R	-55~125℃ at 25℃																												
		X7S	-55 ~ 125℃ at 25℃																												
		X5R	-55~ 85℃ at 25℃																												
		X6S	-55~105℃ at 25℃																												
		Y5V	-25~ 85℃ at 20℃																												
		T.C.	Capacitance Change																												
NPO	Within ±30ppm/℃																														
X7R	Within ±15%																														
X7S	Within ±22%																														
X5R	Within ±15%																														
X6S	Within ±22%																														
Y5V	Within +30%/-80%																														
*Before initial measurement (Class II only): To apply de-aging at 150℃ for 1hr then set for 24± 2 hrs at room temp.																															
* Measurement voltage for Class II:																															
<table><tr><th>01005</th><th>0201</th></tr><tr><td>Cap≤0.01μF: 0.5V</td><td>Cap<0.1μF:1V</td></tr><tr><td>Cap>0.01μF: 0.2V</td><td>0.1μF≤Cap<1μF: 0.2V</td></tr><tr><td></td><td>Cap≥1μF: 0.1V</td></tr><tr><td></td><td>*0201X104/16V: 0.5V</td></tr><tr><th>0402</th><th>0603</th></tr><tr><td>Cap<1μF: 1V</td><td>Caps1μF: 1V</td></tr><tr><td>Cap=1μF: 0.5V</td><td>1μF<Caps4.7μF: 0.5V</td></tr><tr><td>1μF<Cap<10μF: 0.2V</td><td>Cap>4.7μF: 0.2V</td></tr><tr><td>Cap≥10μF: 0.1V</td><td></td></tr><tr><th>0805</th><th>1206/1210</th></tr><tr><td>Cap<10μF: 1V</td><td>Cap≤10μF: 1V</td></tr><tr><td>Cap=10μF: 0.5V</td><td>10μF<Cap≤100μF: 0.5V</td></tr><tr><td>Cap>10μF: 0.2V</td><td>Cap>100μF: 0.2V</td></tr></table>		01005	0201	Cap≤0.01μF: 0.5V	Cap<0.1μF:1V	Cap>0.01μF: 0.2V	0.1μF≤Cap<1μF: 0.2V		Cap≥1μF: 0.1V		*0201X104/16V: 0.5V	0402	0603	Cap<1μF: 1V	Caps1μF: 1V	Cap=1μF: 0.5V	1μF<Caps4.7μF: 0.5V	1μF<Cap<10μF: 0.2V	Cap>4.7μF: 0.2V	Cap≥10μF: 0.1V		0805	1206/1210	Cap<10μF: 1V	Cap≤10μF: 1V	Cap=10μF: 0.5V	10μF<Cap≤100μF: 0.5V	Cap>10μF: 0.2V	Cap>100μF: 0.2V		
01005	0201																														
Cap≤0.01μF: 0.5V	Cap<0.1μF:1V																														
Cap>0.01μF: 0.2V	0.1μF≤Cap<1μF: 0.2V																														
	Cap≥1μF: 0.1V																														
	*0201X104/16V: 0.5V																														
0402	0603																														
Cap<1μF: 1V	Caps1μF: 1V																														
Cap=1μF: 0.5V	1μF<Caps4.7μF: 0.5V																														
1μF<Cap<10μF: 0.2V	Cap>4.7μF: 0.2V																														
Cap≥10μF: 0.1V																															
0805	1206/1210																														
Cap<10μF: 1V	Cap≤10μF: 1V																														
Cap=10μF: 0.5V	10μF<Cap≤100μF: 0.5V																														
Cap>10μF: 0.2V	Cap>100μF: 0.2V																														

Multilayer Ceramic Capacitors

No.	Item	Test Condition	Requirements																																																																																																																
13.	Humidity (Damp Heat) Steady State	*Test temp.: 40±2℃ *Humidity: 90~95%RH *Test time: 500+24/-0hrs. *Before initial measurement (Class II only): To apply de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. * Cap change: NP0: within ±5% or 0.5pF whichever is larger X7R, X5R, X6S, X7S: ≥10V**,within ±12.5%; ≤6.3V within ±25%; TT series & C≥ 1uF,within ±25% **10V: 0603≥4.7μF;0402≥1μF;0201≥0.1μF, within ±25%; Y5V: ≥10V, within ±30%; ≤6.3V, within +30/-40% * Q/D.F. value: NP0: More than 30pF Q≥350, 10pF≤C≤30pF, Q≥275+2.5C Less than 10pF Q≥200+10C X7R, X5R, X6S, X7S: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td rowspan="3">≥ 100V</td><td rowspan="3">≤ 3%</td><td>≤ 6%</td><td>1206 ≥ 0.47μF</td></tr><tr><td>≤ 7.5%</td><td>0805 > 0.1μF, 0603 ≥ 0.068μF, 1206 > 1μF; 1210 ≥ 2.2μF; TT series</td></tr><tr><td>≤ 20%</td><td>0805 > 0.22μF; 1210 ≥ 3.3μF</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤ 3%</td><td>≤ 6%</td><td>0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF</td></tr><tr><td>≤ 10%</td><td>0201 ≥ 0.01uF; 1210 ≥ 4.7μF</td></tr><tr><td>≤ 20%</td><td>0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF(0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series</td></tr><tr><td>35V</td><td>≤ 5%</td><td>≤ 20%</td><td>0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤ 5%</td><td>≤ 10%</td><td>0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF</td></tr><tr><td>≤ 14%</td><td>0603 ≥ 0.33μF</td></tr><tr><td>≤ 15%</td><td>0201 ≥ 0.1μF; 0402 ≥ 0.10μF & (0402/X7R ≥ 0.056μF); TT series</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤ 5%</td><td>≤ 20%</td><td>0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 10%</td><td>0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF</td></tr><tr><td>≤ 15%</td><td>0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF); 0402 ≥ 0.033μF; 0603 ≥ 0.68μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤ 7.5%</td><td>≤ 15%</td><td>0201 ≥ 0.012μF; 0402 ≥ 0.33μF(0402/X7R ≥ 0.22μF);</td></tr><tr><td>≤ 20%</td><td>0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 20%</td><td>0201 ≥ 0.1μF ; 0402 ≥ 1μF; TT series; 01R5</td></tr><tr><td>6.3V</td><td>≤ 15%</td><td>≤ 30%</td><td>0201 ≥ 0.1μF; 0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF; TT series</td></tr><tr><td>4V</td><td>≤ 20%</td><td>---</td><td>---</td></tr></table> Y5V: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td rowspan="3">≥ 50V</td><td rowspan="3">≤ 7.5%</td><td>≤ 10%</td><td>0603 ≥ 0.1μF; 0805 ≥ 0.47μF;</td></tr><tr><td>≤ 20%</td><td>1206 ≥ 4.7μF</td></tr><tr><td>≤ 20%</td><td>1210 ≥ 6.8μF</td></tr><tr><td>35V</td><td>≤ 10%</td><td>---</td><td>---</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤ 7.5%</td><td>≤ 10%</td><td>0402 ≥ 0.047μF; 0603 ≥ 0.1μF;</td></tr><tr><td>≤ 15%</td><td>0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF</td></tr><tr><td>≤ 20%</td><td>0402 ≥ 0.068μF; 0603 ≥ 0.47μF;</td></tr><tr><td>16V</td><td>≤ 10%</td><td>≤ 12.5%</td><td>1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td rowspan="2">16V (C < 1.0μF)</td><td rowspan="2">≤ 10%</td><td>≤ 20%</td><td>0402 ≥ 0.068μF; 0603 ≥ 0.68μF</td></tr><tr><td>≤ 20%</td><td>0402 ≥ 0.22μF</td></tr><tr><td>16V (C ≥ 1.0μF)</td><td>≤ 12.5%</td><td>≤ 20%</td><td>0603 ≥ 2.2μF; 0805 ≥ 3.3μF;</td></tr><tr><td>10V</td><td>≤ 20%</td><td>≤ 30%</td><td>1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF;</td></tr><tr><td>6.3V</td><td>≤ 30%</td><td>---</td><td>0402 ≥ 0.47μF</td></tr></table> *I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller. Class II (X7R, X5R, X6S, X7S, Y5V) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: All X7R; 1210 ≥ 3.3μF</td><td rowspan="7">1GΩ or RxC ≥ 10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF</td></tr><tr><td>35V: 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td>25V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF</td></tr><tr><td>16V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 47μF</td></tr><tr><td>10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 47μF</td></tr><tr><td>6.3V ; 4V ; TT series ; All X6S/X7S items; Size ≥ 1812</td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤		≥ 100V	≤ 3%	≤ 6%	1206 ≥ 0.47μF	≤ 7.5%	0805 > 0.1μF, 0603 ≥ 0.068μF, 1206 > 1μF; 1210 ≥ 2.2μF; TT series	≤ 20%	0805 > 0.22μF; 1210 ≥ 3.3μF	50V	≤ 3%	≤ 6%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF	≤ 10%	0201 ≥ 0.01uF; 1210 ≥ 4.7μF	≤ 20%	0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF(0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series	35V	≤ 5%	≤ 20%	0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	25V	≤ 5%	≤ 10%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF	≤ 14%	0603 ≥ 0.33μF	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 0.10μF & (0402/X7R ≥ 0.056μF); TT series	16V	≤ 5%	≤ 20%	0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	≤ 10%	0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF	≤ 15%	0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF); 0402 ≥ 0.033μF; 0603 ≥ 0.68μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series	10V	≤ 7.5%	≤ 15%	0201 ≥ 0.012μF; 0402 ≥ 0.33μF(0402/X7R ≥ 0.22μF);	≤ 20%	0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF	≤ 20%	0201 ≥ 0.1μF ; 0402 ≥ 1μF; TT series; 01R5	6.3V	≤ 15%	≤ 30%	0201 ≥ 0.1μF; 0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF; TT series	4V	≤ 20%	---	---	Rated vol.	D.F. ≤	Exception of D.F. ≤		≥ 50V	≤ 7.5%	≤ 10%	0603 ≥ 0.1μF; 0805 ≥ 0.47μF;	≤ 20%	1206 ≥ 4.7μF	≤ 20%	1210 ≥ 6.8μF	35V	≤ 10%	---	---	25V	≤ 7.5%	≤ 10%	0402 ≥ 0.047μF; 0603 ≥ 0.1μF;	≤ 15%	0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF	≤ 20%	0402 ≥ 0.068μF; 0603 ≥ 0.47μF;	16V	≤ 10%	≤ 12.5%	1206 ≥ 4.7μF; 1210 ≥ 22μF	16V (C < 1.0μF)	≤ 10%	≤ 20%	0402 ≥ 0.068μF; 0603 ≥ 0.68μF	≤ 20%	0402 ≥ 0.22μF	16V (C ≥ 1.0μF)	≤ 12.5%	≤ 20%	0603 ≥ 2.2μF; 0805 ≥ 3.3μF;	10V	≤ 20%	≤ 30%	1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF;	6.3V	≤ 30%	---	0402 ≥ 0.47μF	Rated voltage	Insulation Resistance	100V: All X7R; 1210 ≥ 3.3μF	1GΩ or RxC ≥ 10 Ω-F whichever is smaller.	50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF	35V: 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	25V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF	16V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 47μF	10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 47μF	6.3V ; 4V ; TT series ; All X6S/X7S items; Size ≥ 1812
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																																																																	
≥ 100V	≤ 3%	≤ 6%	1206 ≥ 0.47μF																																																																																																																
		≤ 7.5%	0805 > 0.1μF, 0603 ≥ 0.068μF, 1206 > 1μF; 1210 ≥ 2.2μF; TT series																																																																																																																
		≤ 20%	0805 > 0.22μF; 1210 ≥ 3.3μF																																																																																																																
50V	≤ 3%	≤ 6%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF																																																																																																																
		≤ 10%	0201 ≥ 0.01uF; 1210 ≥ 4.7μF																																																																																																																
		≤ 20%	0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF(0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series																																																																																																																
35V	≤ 5%	≤ 20%	0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																																																																																
25V	≤ 5%	≤ 10%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF																																																																																																																
		≤ 14%	0603 ≥ 0.33μF																																																																																																																
		≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 0.10μF & (0402/X7R ≥ 0.056μF); TT series																																																																																																																
16V	≤ 5%	≤ 20%	0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																																																																																																
		≤ 10%	0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF																																																																																																																
		≤ 15%	0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF); 0402 ≥ 0.033μF; 0603 ≥ 0.68μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series																																																																																																																
10V	≤ 7.5%	≤ 15%	0201 ≥ 0.012μF; 0402 ≥ 0.33μF(0402/X7R ≥ 0.22μF);																																																																																																																
		≤ 20%	0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF																																																																																																																
		≤ 20%	0201 ≥ 0.1μF ; 0402 ≥ 1μF; TT series; 01R5																																																																																																																
6.3V	≤ 15%	≤ 30%	0201 ≥ 0.1μF; 0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF; TT series																																																																																																																
4V	≤ 20%	---	---																																																																																																																
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																																																																	
≥ 50V	≤ 7.5%	≤ 10%	0603 ≥ 0.1μF; 0805 ≥ 0.47μF;																																																																																																																
		≤ 20%	1206 ≥ 4.7μF																																																																																																																
		≤ 20%	1210 ≥ 6.8μF																																																																																																																
35V	≤ 10%	---	---																																																																																																																
25V	≤ 7.5%	≤ 10%	0402 ≥ 0.047μF; 0603 ≥ 0.1μF;																																																																																																																
		≤ 15%	0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF																																																																																																																
		≤ 20%	0402 ≥ 0.068μF; 0603 ≥ 0.47μF;																																																																																																																
16V	≤ 10%	≤ 12.5%	1206 ≥ 4.7μF; 1210 ≥ 22μF																																																																																																																
16V (C < 1.0μF)	≤ 10%	≤ 20%	0402 ≥ 0.068μF; 0603 ≥ 0.68μF																																																																																																																
		≤ 20%	0402 ≥ 0.22μF																																																																																																																
16V (C ≥ 1.0μF)	≤ 12.5%	≤ 20%	0603 ≥ 2.2μF; 0805 ≥ 3.3μF;																																																																																																																
10V	≤ 20%	≤ 30%	1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF;																																																																																																																
6.3V	≤ 30%	---	0402 ≥ 0.47μF																																																																																																																
Rated voltage	Insulation Resistance																																																																																																																		
100V: All X7R; 1210 ≥ 3.3μF	1GΩ or RxC ≥ 10 Ω-F whichever is smaller.																																																																																																																		
50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF																																																																																																																			
35V: 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																																																																																			
25V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF																																																																																																																			
16V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 47μF																																																																																																																			
10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 47μF																																																																																																																			
6.3V ; 4V ; TT series ; All X6S/X7S items; Size ≥ 1812																																																																																																																			

Multilayer Ceramic Capacitors

No	Item	Test Condition	Requirements																																																																											
14	Humidity (Damp Heat) Load	*Test temp. : 40±2℃ *Humidity : 90~95%RH *Test time : 500+24/-0 hrs. *To apply voltage : Rated voltage (MAX. 500V) *Before initial measurement (Class II only): To apply de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150℃ for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. Cap change: NP0: ±7.5% or 0.75pF whichever is larger. X7R, X5R, X6S, X7S: ≥10V**,within ±12.5%; ≤6.3V within ±25%; TT series & C≥ 1uF,within ±25% **10V: 0603 ≥ 4.7μF;0402 ≥ 1μF;0201 ≥ 0.1μF, within ±25%; Y5V: ≥10V, within ±30%; ≤6.3V, within +30/-40% Q/D.F. value: NP0: C≥30pF,Q≥200;C<30pF, Q≥100+10/3C X7R, X5R, X6S, X7S: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td rowspan="3">≥ 100V</td><td rowspan="3">≤ 3%</td><td>≤ 6% 1206 ≥ 0.47μF</td></tr><tr><td>≤ 7.5% 0805 > 0.1μF, 0603 ≥ 0.068μF, 1206 > 1μF; 1210 ≥ 2.2μF; TT series</td></tr><tr><td>≤ 20% 0805 > 0.22μF; 1210 ≥ 3.3μF</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤ 3%</td><td>≤ 6% 0201(50V);0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF</td></tr><tr><td>≤ 10% 0201 ≥ 0.01uF;1210 ≥ 4.7μF</td></tr><tr><td>≤ 20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF(0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series</td></tr><tr><td>35V</td><td>≤ 5%</td><td>≤ 20% 0603 ≥ 1μF;0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td rowspan="4">25V</td><td rowspan="4">≤ 5%</td><td>≤ 10% 0201 ≥ 0.01μF;0805 ≥ 1μF; 1210 ≥ 10μF</td></tr><tr><td>≤ 14% 0603 ≥ 0.33μF</td></tr><tr><td>≤ 15% 0201 ≥ 0.1μF;0402 ≥ 0.10μF&(0402/X7R ≥ 0.056μF); TT series</td></tr><tr><td>≤ 20% 0603 ≥ 0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤ 5%</td><td>≤ 10% 0402 ≥ 0.47μF</td></tr><tr><td>≤ 10% 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF</td></tr><tr><td>≤ 15% 0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF);0402 ≥ 0.033μF; 0603 ≥ 0.68μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series</td></tr><tr><td>10V</td><td>≤ 7.5%</td><td>≤ 15% 0201 ≥ 0.012μF; 0402 ≥ 0.33μF(0402/X7R ≥ 0.22μF); 0603 ≥ 0.33μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF; 1210 ≥ 22μF</td></tr><tr><td rowspan="2">6.3V</td><td rowspan="2">≤ 15%</td><td>≤ 20% 0201 ≥ 0.1μF ;0402 ≥ 1μF; TT series; 01R5</td></tr><tr><td>≤ 30% 0201 ≥ 0.1μF;0402 ≥ 1μF(0402/X6S ≥ 0.47μF);0603 ≥ 10μF; 0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF;TT series</td></tr><tr><td>4V</td><td>≤ 20%</td><td>---</td></tr></table> Y5V: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td rowspan="2">≥ 50V</td><td rowspan="2">≤ 7.5%</td><td>≤ 10% 0603 ≥ 0.1μF; 0805 ≥ 0.47μF;1206 ≥ 4.7μF</td></tr><tr><td>≤ 20% 1210 ≥ 6.8μF</td></tr><tr><td>35V</td><td>≤ 10%</td><td>---</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤ 7.5%</td><td>≤ 10% 0402 ≥ 0.047μF;0603 ≥ 0.1μF; 0805 ≥ 0.33μF;1206 ≥ 1μF; 1210 ≥ 4.7μF</td></tr><tr><td>≤ 15% 0402 ≥ 0.068μF;0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 12.5% 0402 ≥ 0.068μF; 0603 ≥ 0.68μF</td></tr><tr><td>16V (C<1.0μF)</td><td>≤ 10%</td><td>≤ 20% 0402 ≥ 0.22μF</td></tr><tr><td>16V (C ≥ 1.0μF)</td><td>≤ 12.5%</td><td>≤ 20% 0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF;1210 ≥ 22μF; 1812 ≥ 47μF;</td></tr><tr><td>10V</td><td>≤ 20%</td><td>≤ 30% 0402 ≥ 0.47μF</td></tr><tr><td>6.3V</td><td>≤ 30%</td><td>---</td></tr></table> *I.R.: ≥10V, 500MΩ or 25 Ω·F whichever is smaller. Class II (X7R, X5R, X6S, X7S, Y5V) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: All X7R;1210≥3.3μF</td><td rowspan="6">500MΩ or RxC ≥ 5 Ω·F whichever is smaller.</td></tr><tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr><tr><td>35V:0603≥1μF;0805≥2.2μF, 1206 ≥ 2.2μF;1210 ≥ 10μF</td></tr><tr><td>25V:0201 ≥ 0.1uF; 0402≥0.22μF; 0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF</td></tr><tr><td>16V: 0201 ≥ 0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF</td></tr><tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td></tr><tr><td>6.3V ; 4V ; TT series ; All X6S/X7S items; Size≥1812</td><td></td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤	≥ 100V	≤ 3%	≤ 6% 1206 ≥ 0.47μF	≤ 7.5% 0805 > 0.1μF, 0603 ≥ 0.068μF, 1206 > 1μF; 1210 ≥ 2.2μF; TT series	≤ 20% 0805 > 0.22μF; 1210 ≥ 3.3μF	50V	≤ 3%	≤ 6% 0201(50V);0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF	≤ 10% 0201 ≥ 0.01uF;1210 ≥ 4.7μF	≤ 20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF(0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series	35V	≤ 5%	≤ 20% 0603 ≥ 1μF;0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	25V	≤ 5%	≤ 10% 0201 ≥ 0.01μF;0805 ≥ 1μF; 1210 ≥ 10μF	≤ 14% 0603 ≥ 0.33μF	≤ 15% 0201 ≥ 0.1μF;0402 ≥ 0.10μF&(0402/X7R ≥ 0.056μF); TT series	≤ 20% 0603 ≥ 0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF	16V	≤ 5%	≤ 10% 0402 ≥ 0.47μF	≤ 10% 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF	≤ 15% 0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF);0402 ≥ 0.033μF; 0603 ≥ 0.68μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series	10V	≤ 7.5%	≤ 15% 0201 ≥ 0.012μF; 0402 ≥ 0.33μF(0402/X7R ≥ 0.22μF); 0603 ≥ 0.33μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF; 1210 ≥ 22μF	6.3V	≤ 15%	≤ 20% 0201 ≥ 0.1μF ;0402 ≥ 1μF; TT series; 01R5	≤ 30% 0201 ≥ 0.1μF;0402 ≥ 1μF(0402/X6S ≥ 0.47μF);0603 ≥ 10μF; 0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF;TT series	4V	≤ 20%	---	Rated vol.	D.F. ≤	Exception of D.F. ≤	≥ 50V	≤ 7.5%	≤ 10% 0603 ≥ 0.1μF; 0805 ≥ 0.47μF;1206 ≥ 4.7μF	≤ 20% 1210 ≥ 6.8μF	35V	≤ 10%	---	25V	≤ 7.5%	≤ 10% 0402 ≥ 0.047μF;0603 ≥ 0.1μF; 0805 ≥ 0.33μF;1206 ≥ 1μF; 1210 ≥ 4.7μF	≤ 15% 0402 ≥ 0.068μF;0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	≤ 12.5% 0402 ≥ 0.068μF; 0603 ≥ 0.68μF	16V (C<1.0μF)	≤ 10%	≤ 20% 0402 ≥ 0.22μF	16V (C ≥ 1.0μF)	≤ 12.5%	≤ 20% 0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF;1210 ≥ 22μF; 1812 ≥ 47μF;	10V	≤ 20%	≤ 30% 0402 ≥ 0.47μF	6.3V	≤ 30%	---	Rated voltage	Insulation Resistance	100V: All X7R;1210≥3.3μF	500MΩ or RxC ≥ 5 Ω·F whichever is smaller.	50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF	35V:0603≥1μF;0805≥2.2μF, 1206 ≥ 2.2μF;1210 ≥ 10μF	25V:0201 ≥ 0.1uF; 0402≥0.22μF; 0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF	16V: 0201 ≥ 0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF	10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF	6.3V ; 4V ; TT series ; All X6S/X7S items; Size≥1812	
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																												
≥ 100V	≤ 3%	≤ 6% 1206 ≥ 0.47μF																																																																												
		≤ 7.5% 0805 > 0.1μF, 0603 ≥ 0.068μF, 1206 > 1μF; 1210 ≥ 2.2μF; TT series																																																																												
		≤ 20% 0805 > 0.22μF; 1210 ≥ 3.3μF																																																																												
50V	≤ 3%	≤ 6% 0201(50V);0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF																																																																												
		≤ 10% 0201 ≥ 0.01uF;1210 ≥ 4.7μF																																																																												
		≤ 20% 0402 ≥ 0.012μF; 0603 > 0.1μF; 0805 ≥ 1μF(0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series																																																																												
35V	≤ 5%	≤ 20% 0603 ≥ 1μF;0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																																												
25V	≤ 5%	≤ 10% 0201 ≥ 0.01μF;0805 ≥ 1μF; 1210 ≥ 10μF																																																																												
		≤ 14% 0603 ≥ 0.33μF																																																																												
		≤ 15% 0201 ≥ 0.1μF;0402 ≥ 0.10μF&(0402/X7R ≥ 0.056μF); TT series																																																																												
		≤ 20% 0603 ≥ 0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF																																																																												
16V	≤ 5%	≤ 10% 0402 ≥ 0.47μF																																																																												
		≤ 10% 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF																																																																												
		≤ 15% 0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF);0402 ≥ 0.033μF; 0603 ≥ 0.68μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series																																																																												
10V	≤ 7.5%	≤ 15% 0201 ≥ 0.012μF; 0402 ≥ 0.33μF(0402/X7R ≥ 0.22μF); 0603 ≥ 0.33μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF; 1210 ≥ 22μF																																																																												
6.3V	≤ 15%	≤ 20% 0201 ≥ 0.1μF ;0402 ≥ 1μF; TT series; 01R5																																																																												
		≤ 30% 0201 ≥ 0.1μF;0402 ≥ 1μF(0402/X6S ≥ 0.47μF);0603 ≥ 10μF; 0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF;TT series																																																																												
4V	≤ 20%	---																																																																												
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																												
≥ 50V	≤ 7.5%	≤ 10% 0603 ≥ 0.1μF; 0805 ≥ 0.47μF;1206 ≥ 4.7μF																																																																												
		≤ 20% 1210 ≥ 6.8μF																																																																												
35V	≤ 10%	---																																																																												
25V	≤ 7.5%	≤ 10% 0402 ≥ 0.047μF;0603 ≥ 0.1μF; 0805 ≥ 0.33μF;1206 ≥ 1μF; 1210 ≥ 4.7μF																																																																												
		≤ 15% 0402 ≥ 0.068μF;0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																																																												
		≤ 12.5% 0402 ≥ 0.068μF; 0603 ≥ 0.68μF																																																																												
16V (C<1.0μF)	≤ 10%	≤ 20% 0402 ≥ 0.22μF																																																																												
16V (C ≥ 1.0μF)	≤ 12.5%	≤ 20% 0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF;1210 ≥ 22μF; 1812 ≥ 47μF;																																																																												
10V	≤ 20%	≤ 30% 0402 ≥ 0.47μF																																																																												
6.3V	≤ 30%	---																																																																												
Rated voltage	Insulation Resistance																																																																													
100V: All X7R;1210≥3.3μF	500MΩ or RxC ≥ 5 Ω·F whichever is smaller.																																																																													
50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF																																																																														
35V:0603≥1μF;0805≥2.2μF, 1206 ≥ 2.2μF;1210 ≥ 10μF																																																																														
25V:0201 ≥ 0.1uF; 0402≥0.22μF; 0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF																																																																														
16V: 0201 ≥ 0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF																																																																														
10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF																																																																														
6.3V ; 4V ; TT series ; All X6S/X7S items; Size≥1812																																																																														

Multilayer Ceramic Capacitors

No	Item	Test Condition	Requirements																																																																																																																																																																																																									
15.	High Temperature Load (Endurance)	Test temp. : NP0, X7R/X7E/X7S: 125±3°C X6S: 105±3°C X5R, Y5V: 85±3°C *Test time: 1000+24/-0 hrs. *To apply voltage: (1) ≤6.3V or C≥10μF or TT series: 150% of rated voltage. (2) 10V~250V: 200% of rated voltage. (3) 400V~450V: 120% of rated voltage. (4) 500V: 150% of rated voltage. (5) 630V~3000V: 120% of rated voltage. (6) 4000V: 110% of rated voltage (7) 100% of rated voltage for below range. <table><tr><th>Size</th><th>Dielectric</th><th>Rated voltage</th><th>Capacitance range</th></tr><tr><td rowspan="2">0201</td><td rowspan="2">X5R/X7R/X6S</td><td>≤10V</td><td>C≥0.1μF</td></tr><tr><td>≥16V</td><td>C>0.1μF</td></tr><tr><td rowspan="4">0402</td><td rowspan="2">X5R</td><td>≤16V</td><td>C>1.0μF</td></tr><tr><td>25V, 50V</td><td>C≥1.0μF</td></tr><tr><td rowspan="2">X6S</td><td>6.3V</td><td>C>1.0μF</td></tr><tr><td>10V~25V</td><td>C≥1.0μF</td></tr><tr><td rowspan="2"></td><td>X7R/X7S/Y5V</td><td>6.3V, 10V</td><td>C≥1.0μF</td></tr><tr><td rowspan="3">X5R/X7R/X6S/X7S</td><td>4V</td><td>C≥22μF</td></tr><tr><td>6.3V, 10V</td><td>C≥4.7μF</td></tr><tr><td>25V, 35V</td><td>C≥1.0μF</td></tr><tr><td rowspan="3">0805</td><td rowspan="3">X5R/X7R/X6S/X7S</td><td>4V</td><td>C≥47μF</td></tr><tr><td>6.3V</td><td>C≥22μF</td></tr><tr><td>10V~50V</td><td>C≥10μF</td></tr><tr><td>1206</td><td>X5R/X7R/X6S</td><td>≤6.3V</td><td>C≥47μF</td></tr><tr><td rowspan="2">1210</td><td>X5R/X7R/X6S</td><td>16V</td><td>C≥47μF</td></tr><tr><td>X7R</td><td>100V</td><td>C≥3.3μF</td></tr><tr><td>TT15</td><td>X5R</td><td>6.3V</td><td>C>1.0μF</td></tr><tr><td>TT18</td><td>Y5V</td><td>6.3V, 10V</td><td>C≥2.2μF</td></tr><tr><td rowspan="2">TT21</td><td rowspan="2">Y5V</td><td>6.3V</td><td>C≥10μF</td></tr><tr><td>X5R/X7R/X6S</td><td>≤10V</td><td>C≥10μF</td></tr><tr><td>TT31</td><td>Y5V</td><td>6.3V</td><td>C≥22μF</td></tr></table> **1WV items must follow de-rating conditions. (8) 150% of rated voltage for below range. <table><tr><th>Size</th><th>Dielectric</th><th>Rated voltage</th><th>Capacitance range</th></tr><tr><td rowspan="2">0201</td><td>X5R/X6S</td><td>16V, 25V</td><td>C=0.1μF</td></tr><tr><td>X7R</td><td>16V</td><td>C≥0.022μF</td></tr><tr><td rowspan="3">0402</td><td>X7R/X5R/X6S</td><td>50V</td><td>C>0.1μF</td></tr><tr><td rowspan="2">Y5V</td><td>10~25V</td><td>C≥0.22μF</td></tr><tr><td>16V</td><td>C≥0.47μF</td></tr><tr><td rowspan="6">0603</td><td>X7S</td><td>50V~100V</td><td>C>0.22μF</td></tr><tr><td>X7R</td><td>50V</td><td>C>0.1μF</td></tr><tr><td>X5R</td><td>50V</td><td>C≥1.0μF</td></tr><tr><td>X5R/X7R/X6S/X7S</td><td>10V, 16V,</td><td>C≥1.0μF</td></tr><tr><td rowspan="2">Y5V</td><td>16V</td><td>C≥2.2μF</td></tr><tr><td>100V</td><td>C≥0.47μF</td></tr><tr><td rowspan="4">0805</td><td rowspan="4">X5R/X7R/X6S/X7S</td><td>50V</td><td>C≥1.0μF</td></tr><tr><td>35V</td><td>C≥2.2μF</td></tr><tr><td>10~25V</td><td>C≥4.7μF</td></tr><tr><td>Y5V</td><td>16V</td><td>C≥4.7μF</td></tr><tr><td>1206</td><td>X5R/X7R/X6S/X7S</td><td>100V</td><td>C>1.0μF</td></tr><tr><td rowspan="2">1210</td><td rowspan="2">X5R/X7R/X6S/X7S</td><td>50V</td><td>C=4.7μF</td></tr><tr><td>50V~100V</td><td>C≥2.2μF</td></tr><tr><td>1825 2220 2225</td><td>X7R</td><td>100V~250V</td><td>C≥1.0μF</td></tr></table> * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * De-rating conditions:	Size	Dielectric	Rated voltage	Capacitance range	0201	X5R/X7R/X6S	≤10V	C≥0.1μF	≥16V	C>0.1μF	0402	X5R	≤16V	C>1.0μF	25V, 50V	C≥1.0μF	X6S	6.3V	C>1.0μF	10V~25V	C≥1.0μF		X7R/X7S/Y5V	6.3V, 10V	C≥1.0μF	X5R/X7R/X6S/X7S	4V	C≥22μF	6.3V, 10V	C≥4.7μF	25V, 35V	C≥1.0μF	0805	X5R/X7R/X6S/X7S	4V	C≥47μF	6.3V	C≥22μF	10V~50V	C≥10μF	1206	X5R/X7R/X6S	≤6.3V	C≥47μF	1210	X5R/X7R/X6S	16V	C≥47μF	X7R	100V	C≥3.3μF	TT15	X5R	6.3V	C>1.0μF	TT18	Y5V	6.3V, 10V	C≥2.2μF	TT21	Y5V	6.3V	C≥10μF	X5R/X7R/X6S	≤10V	C≥10μF	TT31	Y5V	6.3V	C≥22μF	Size	Dielectric	Rated voltage	Capacitance range	0201	X5R/X6S	16V, 25V	C=0.1μF	X7R	16V	C≥0.022μF	0402	X7R/X5R/X6S	50V	C>0.1μF	Y5V	10~25V	C≥0.22μF	16V	C≥0.47μF	0603	X7S	50V~100V	C>0.22μF	X7R	50V	C>0.1μF	X5R	50V	C≥1.0μF	X5R/X7R/X6S/X7S	10V, 16V,	C≥1.0μF	Y5V	16V	C≥2.2μF	100V	C≥0.47μF	0805	X5R/X7R/X6S/X7S	50V	C≥1.0μF	35V	C≥2.2μF	10~25V	C≥4.7μF	Y5V	16V	C≥4.7μF	1206	X5R/X7R/X6S/X7S	100V	C>1.0μF	1210	X5R/X7R/X6S/X7S	50V	C=4.7μF	50V~100V	C≥2.2μF	1825 2220 2225	X7R	100V~250V	C≥1.0μF	* No remarkable damage. Cap change: NP0: ±3.0% or ±0.3pF whichever is larger X7R, X5R, X6S, X7S: ≥10V**, within ±12.5%; ≤6.3V within ±25%; TT series & C≥1μF, within ±25% **10V: 0603≥4.7μF; 0402≥1μF; 0201≥0.1μF, within ±25%; Y5V: ≥10V, within ±30%; ≤6.3V, within ±30/-40% Q/D.F. value: NP0: More than 30pF, Q≥350 10pF≤C<30pF, Q≥275+2.5C Less than 10pF, Q≥200+10C X7R, X5R, X6S, X7S: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td rowspan="2">≥100V</td><td rowspan="2">≤3%</td><td>≤6% 1206≥0.47μF ≤7.5% 0805>0.1μF; 0603≥0.068μF; 1206>1μF; 1210≥2.2μF; TT series ≤20% 0805>0.22μF; 1210≥3.3μF</td></tr><tr><td>≤6% 0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF ≤10% 0201≥0.01μF; 1210≥4.7μF</td></tr><tr><td rowspan="2">50V</td><td rowspan="2">≤3%</td><td>≤20% 0402≥0.012μF; 0603>0.1μF; 0805≥1μF(0805/X7R>0.47μF); 1206≥2.2μF; 1210≥10μF; TT series ≤20% 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td></tr><tr><td>≤10% 0201≥0.01μF; 0805≥1μF; 1210≥10μF ≤14% 0603≥0.33μF</td></tr><tr><td rowspan="3">35V</td><td rowspan="3">≤5%</td><td>≤15% 0201≥0.1μF; 0402≥0.10μF(0402/X7R≥0.056μF); TT series ≤20% 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF 0402≥0.47μF</td></tr><tr><td>≤10% 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF ≤15% 0201≥0.01μF(0201/X7R≥0.022μF); 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series</td></tr><tr><td>≤15% 0201≥0.012μF; 0402≥0.33μF(0402/X7R≥0.22μF); 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td rowspan="2">16V</td><td rowspan="2">≤5%</td><td>≤20% 0201≥0.1μF; 0402≥1μF; TT series; 01R5 ≤30% 0201≥0.1μF; 0402≥1μF(0402/X6S≥0.47μF); 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF; TT series</td></tr><tr><td>---</td></tr><tr><td>10V</td><td>≤7.5%</td><td>---</td></tr><tr><td>6.3V</td><td>≤15%</td><td>---</td></tr><tr><td>4V</td><td>≤20%</td><td>---</td></tr></table> Y5V: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td rowspan="2">≥50V</td><td rowspan="2">≤7.5%</td><td>≤10% 0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF ≤20% 1210≥6.8μF</td></tr><tr><td>---</td></tr><tr><td rowspan="2">35V</td><td rowspan="2">≤10%</td><td>---</td></tr><tr><td>---</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤7.5%</td><td>≤10% 0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF ≤15% 0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td>≤12.5% 0402≥0.068μF; 0603≥0.68μF ≤20% 0402≥0.22μF</td></tr><tr><td>≤20% 0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF; ≤30% 0402≥0.47μF</td></tr><tr><td>16V (C<1.0μF)</td><td>≤10%</td><td>---</td></tr><tr><td>16V (C≥1.0μF)</td><td>≤12.5%</td><td>---</td></tr><tr><td>10V</td><td>≤20%</td><td>---</td></tr><tr><td>6.3V</td><td>≤30%</td><td>---</td></tr></table> *I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller. Class II (X7R, X5R, X6S, X7S, Y5V) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: All X7R; 1210≥3.3μF</td><td rowspan="6">1GΩ or RxC ≥ 10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF</td></tr><tr><td>25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V ; 4V ; TT series ; All X6S/X7S items; Size≥1812</td><td></td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤	≥100V	≤3%	≤6% 1206≥0.47μF ≤7.5% 0805>0.1μF; 0603≥0.068μF; 1206>1μF; 1210≥2.2μF; TT series ≤20% 0805>0.22μF; 1210≥3.3μF	≤6% 0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF ≤10% 0201≥0.01μF; 1210≥4.7μF	50V	≤3%	≤20% 0402≥0.012μF; 0603>0.1μF; 0805≥1μF(0805/X7R>0.47μF); 1206≥2.2μF; 1210≥10μF; TT series ≤20% 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	≤10% 0201≥0.01μF; 0805≥1μF; 1210≥10μF ≤14% 0603≥0.33μF	35V	≤5%	≤15% 0201≥0.1μF; 0402≥0.10μF(0402/X7R≥0.056μF); TT series ≤20% 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF 0402≥0.47μF	≤10% 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF ≤15% 0201≥0.01μF(0201/X7R≥0.022μF); 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series	≤15% 0201≥0.012μF; 0402≥0.33μF(0402/X7R≥0.22μF); 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	16V	≤5%	≤20% 0201≥0.1μF; 0402≥1μF; TT series; 01R5 ≤30% 0201≥0.1μF; 0402≥1μF(0402/X6S≥0.47μF); 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF; TT series	---	10V	≤7.5%	---	6.3V	≤15%	---	4V	≤20%	---	Rated vol.	D.F. ≤	Exception of D.F. ≤	≥50V	≤7.5%	≤10% 0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF ≤20% 1210≥6.8μF	---	35V	≤10%	---	---	25V	≤7.5%	≤10% 0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF ≤15% 0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF	≤12.5% 0402≥0.068μF; 0603≥0.68μF ≤20% 0402≥0.22μF	≤20% 0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF; ≤30% 0402≥0.47μF	16V (C<1.0μF)	≤10%	---	16V (C≥1.0μF)	≤12.5%	---	10V	≤20%	---	6.3V	≤30%	---	Rated voltage	Insulation Resistance	100V: All X7R; 1210≥3.3μF	1GΩ or RxC ≥ 10 Ω-F whichever is smaller.	50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF	25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V ; 4V ; TT series ; All X6S/X7S items; Size≥1812	
Size	Dielectric	Rated voltage	Capacitance range																																																																																																																																																																																																									
0201	X5R/X7R/X6S	≤10V	C≥0.1μF																																																																																																																																																																																																									
		≥16V	C>0.1μF																																																																																																																																																																																																									
0402	X5R	≤16V	C>1.0μF																																																																																																																																																																																																									
		25V, 50V	C≥1.0μF																																																																																																																																																																																																									
	X6S	6.3V	C>1.0μF																																																																																																																																																																																																									
		10V~25V	C≥1.0μF																																																																																																																																																																																																									
	X7R/X7S/Y5V	6.3V, 10V	C≥1.0μF																																																																																																																																																																																																									
	X5R/X7R/X6S/X7S	4V	C≥22μF																																																																																																																																																																																																									
6.3V, 10V		C≥4.7μF																																																																																																																																																																																																										
25V, 35V		C≥1.0μF																																																																																																																																																																																																										
0805	X5R/X7R/X6S/X7S	4V	C≥47μF																																																																																																																																																																																																									
		6.3V	C≥22μF																																																																																																																																																																																																									
		10V~50V	C≥10μF																																																																																																																																																																																																									
1206	X5R/X7R/X6S	≤6.3V	C≥47μF																																																																																																																																																																																																									
1210	X5R/X7R/X6S	16V	C≥47μF																																																																																																																																																																																																									
	X7R	100V	C≥3.3μF																																																																																																																																																																																																									
TT15	X5R	6.3V	C>1.0μF																																																																																																																																																																																																									
TT18	Y5V	6.3V, 10V	C≥2.2μF																																																																																																																																																																																																									
TT21	Y5V	6.3V	C≥10μF																																																																																																																																																																																																									
		X5R/X7R/X6S	≤10V	C≥10μF																																																																																																																																																																																																								
TT31	Y5V	6.3V	C≥22μF																																																																																																																																																																																																									
Size	Dielectric	Rated voltage	Capacitance range																																																																																																																																																																																																									
0201	X5R/X6S	16V, 25V	C=0.1μF																																																																																																																																																																																																									
	X7R	16V	C≥0.022μF																																																																																																																																																																																																									
0402	X7R/X5R/X6S	50V	C>0.1μF																																																																																																																																																																																																									
	Y5V	10~25V	C≥0.22μF																																																																																																																																																																																																									
		16V	C≥0.47μF																																																																																																																																																																																																									
0603	X7S	50V~100V	C>0.22μF																																																																																																																																																																																																									
	X7R	50V	C>0.1μF																																																																																																																																																																																																									
	X5R	50V	C≥1.0μF																																																																																																																																																																																																									
	X5R/X7R/X6S/X7S	10V, 16V,	C≥1.0μF																																																																																																																																																																																																									
	Y5V	16V	C≥2.2μF																																																																																																																																																																																																									
		100V	C≥0.47μF																																																																																																																																																																																																									
0805	X5R/X7R/X6S/X7S	50V	C≥1.0μF																																																																																																																																																																																																									
		35V	C≥2.2μF																																																																																																																																																																																																									
		10~25V	C≥4.7μF																																																																																																																																																																																																									
		Y5V	16V	C≥4.7μF																																																																																																																																																																																																								
1206	X5R/X7R/X6S/X7S	100V	C>1.0μF																																																																																																																																																																																																									
1210	X5R/X7R/X6S/X7S	50V	C=4.7μF																																																																																																																																																																																																									
		50V~100V	C≥2.2μF																																																																																																																																																																																																									
1825 2220 2225	X7R	100V~250V	C≥1.0μF																																																																																																																																																																																																									
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																																																																																																																																																										
≥100V	≤3%	≤6% 1206≥0.47μF ≤7.5% 0805>0.1μF; 0603≥0.068μF; 1206>1μF; 1210≥2.2μF; TT series ≤20% 0805>0.22μF; 1210≥3.3μF																																																																																																																																																																																																										
		≤6% 0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF ≤10% 0201≥0.01μF; 1210≥4.7μF																																																																																																																																																																																																										
50V	≤3%	≤20% 0402≥0.012μF; 0603>0.1μF; 0805≥1μF(0805/X7R>0.47μF); 1206≥2.2μF; 1210≥10μF; TT series ≤20% 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																																																																																																																																																																										
		≤10% 0201≥0.01μF; 0805≥1μF; 1210≥10μF ≤14% 0603≥0.33μF																																																																																																																																																																																																										
35V	≤5%	≤15% 0201≥0.1μF; 0402≥0.10μF(0402/X7R≥0.056μF); TT series ≤20% 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF 0402≥0.47μF																																																																																																																																																																																																										
		≤10% 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF ≤15% 0201≥0.01μF(0201/X7R≥0.022μF); 0402≥0.033μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series																																																																																																																																																																																																										
		≤15% 0201≥0.012μF; 0402≥0.33μF(0402/X7R≥0.22μF); 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																																																																																																																																																																																										
16V	≤5%	≤20% 0201≥0.1μF; 0402≥1μF; TT series; 01R5 ≤30% 0201≥0.1μF; 0402≥1μF(0402/X6S≥0.47μF); 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF; TT series																																																																																																																																																																																																										

10V	≤7.5%	---																																																																																																																																																																																																										
6.3V	≤15%	---																																																																																																																																																																																																										
4V	≤20%	---																																																																																																																																																																																																										
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																																																																																																																																																										
≥50V	≤7.5%	≤10% 0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF ≤20% 1210≥6.8μF																																																																																																																																																																																																										

35V	≤10%	---																																																																																																																																																																																																										

25V	≤7.5%	≤10% 0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF ≤15% 0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF																																																																																																																																																																																																										
		≤12.5% 0402≥0.068μF; 0603≥0.68μF ≤20% 0402≥0.22μF																																																																																																																																																																																																										
		≤20% 0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF; ≤30% 0402≥0.47μF																																																																																																																																																																																																										
16V (C<1.0μF)	≤10%	---																																																																																																																																																																																																										
16V (C≥1.0μF)	≤12.5%	---																																																																																																																																																																																																										
10V	≤20%	---																																																																																																																																																																																																										
6.3V	≤30%	---																																																																																																																																																																																																										
Rated voltage	Insulation Resistance																																																																																																																																																																																																											
100V: All X7R; 1210≥3.3μF	1GΩ or RxC ≥ 10 Ω-F whichever is smaller.																																																																																																																																																																																																											
50V: 0402>0.01μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																																																																																																																																																																												
35V: 0603≥1μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥10μF																																																																																																																																																																																																												
25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																																																																																																																																																																												
16V: 0201≥0.1μF; 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																																																																																																																																																																												
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																																																																																																																																																																												
6.3V ; 4V ; TT series ; All X6S/X7S items; Size≥1812																																																																																																																																																																																																												


Ratio (Operating Voltage/Rated Voltage) [%]

Temperature at Product (°C)

Product for 125°C

Product for 105°C

Product for 85°C



Multilayer Ceramic Capacitors

APPENDIXES

■ Tape & reel dimensions

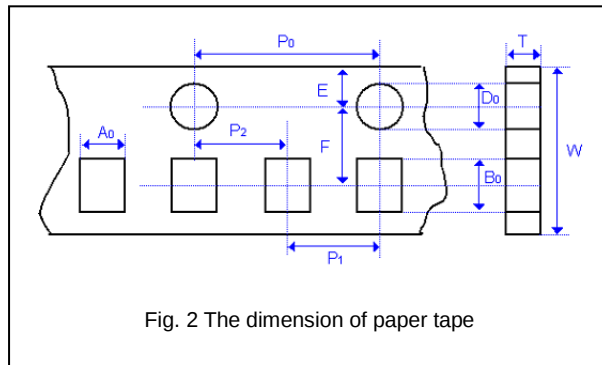


Fig. 2 The dimension of paper tape

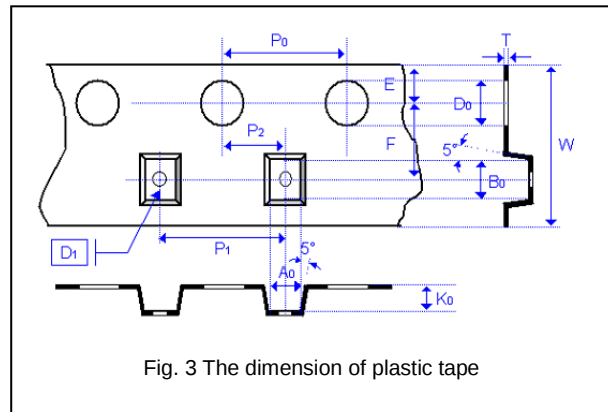


Fig. 3 The dimension of plastic tape

Size	0402	0603	0805			1206			1210		1808	1812		1825		2220		2225	
Thickness	N,E	S,X	A,H	B,T	D,I	B,T	C,J, D	G,P	C,D, G,K	M	D,F, G,K	D,F, G,K	M,U	K	M,U	K	M,U	K	M,U
A ₀	0.70 +/-0.20	1.05 +/-0.30	1.50 +/-0.20	1.50 +/-0.20	< 1.80	1.90 +/-0.50	< 2.00	<2.30	< 3.05	< 3.20	< 2.50	< 3.90	< 3.90	< 6.80	< 6.80	< 5.80	< 5.80	< 6.80	< 6.80
B ₀	1.20 +/-0.20	1.80 +/-0.30	2.30 +/-0.20	2.30 +/-0.20	< 2.70	3.50 +/-0.50	< 3.70	< 4.00	< 3.80	<4.00	< 5.30	< 5.30	< 5.30	< 5.30	< 5.30	< 6.50	< 6.50	< 6.50	< 6.50
T	≤ 0.80	≤ 1.20	≤ 1.15	≤ 1.20	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.25 +/-0.1	0.25 +/-0.1	0.25 +/-0.1	0.30 +/-0.1	0.30 +/-0.1	0.30 +/-0.1	0.30 +/-0.1	0.30 +/-0.1	0.30 +/-0.1
K ₀	-	-	-	-	< 2.50	-	< 2.50	< 2.50	< 2.50	< 3.20	< 2.50	< 2.50	< 3.50	< 2.50	< 3.50	< 2.50	< 3.50	< 2.50	< 3.50
W	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30
P ₀	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10
10xP ₀	40.00 +/-0.10	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20
P ₁	2.00 +/-0.05	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	8.00 +/-0.10	8.00 +/-0.10	8.00 +/-0.10	8.00 +/-0.10	8.00 +/-0.10	8.00 +/-0.10	8.00 +/-0.10
P ₂	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10
D ₀	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0
D ₁	-	-	-	-	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10
E	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10
F	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.05	5.50 +/-0.05	5.50 +/-0.05	5.50 +/-0.05


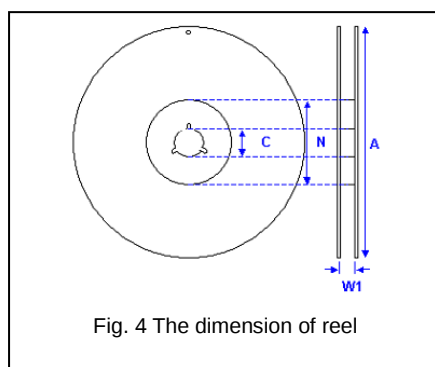


Fig. 4 The dimension of reel

Size	0402, 0603, 0805, 1206, 1210			1808 to 2225
Reel size	7"	10"	13"	7"
C	13.0+0.5/-0.2	13.0+0.5/-0.2	13.0+0.5/-0.2	13.0+0.5/-0.2
W ₁	8.4+1.5/-0	8.4+1.5/-0	8.4+1.5/-0	12.4+2.0/-0
A	178.0±1.0	250.0±1.0	330.0±1.0	178.0±1.00
N	60.0+1.0/-0	100.0±1.0	100±1.0	60.0+1.0/-0

Multilayer Ceramic Capacitors

Example of customer label

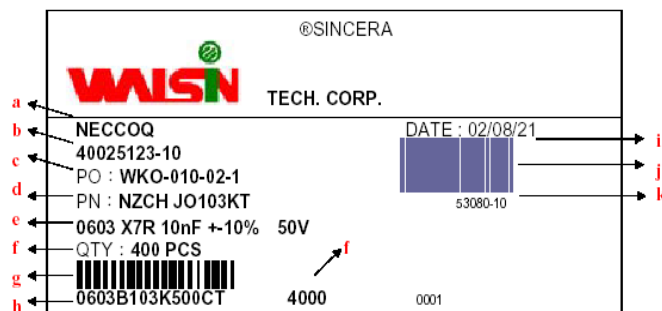


*Customized label is available upon request

- a. Customer name
- b. WTC order series and item number
- c. Customer P/O
- d. Customer P/N
- e. Description of product
- f. Quantity
- g. Bar code including quantity & WTC P/N or customer
- h. WTC P/N
- i. Shipping date
- j. Order bar code including series and item numbers
- k. Serial number of label

Constructions

No.	Name	NPO	X7R, X5R, Y5V
①	Ceramic material	CaZrO ₃ based	BaTiO ₃ based
②	Inner electrode	Ni	
③	Termination	Inner layer	Cu + Ag Polymer
④		Middle layer	Ni
⑤		Outer layer	Sn

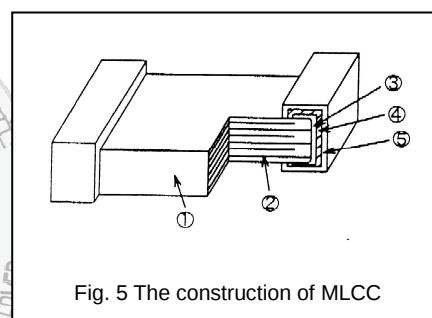

Storage and handling conditions

- (1) To store products at 5 to 40°C ambient temperature and 20 to 70% related humidity conditions.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

- a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
- b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.
- c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N_2 within oven are recommended.

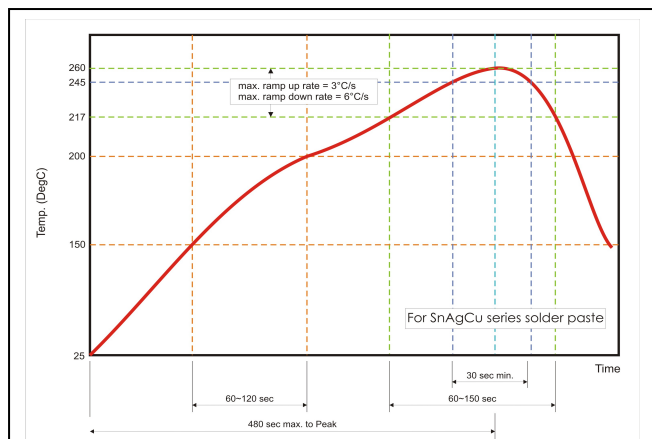


Fig. 6 Recommended reflow soldering profile for SMT process with SnAgCu series solder paste.

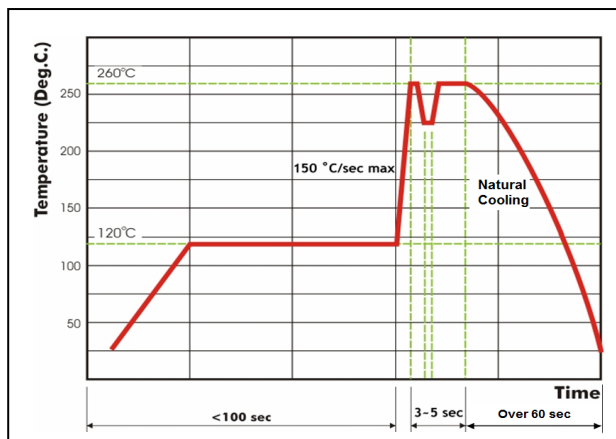


Fig. 7 Recommended wave soldering profile for SMT process with SnAgCu series solder.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Walsin:

<u>SH31B104K251CT</u>	<u>SH18B222K500CT</u>	<u>SH18B102K500CT</u>	<u>SH18B224K250CT</u>	<u>SH18B102K101CT</u>
<u>SH18B103K160CT</u>	<u>SH18B103K500CT</u>	<u>SH18B104K500CT</u>	<u>SH18B154K250CT</u>	<u>SH18B221K101CT</u>
<u>SH31B474K500CT</u>	<u>SH32B105K500CT</u>	<u>SH43B105K500CT</u>	<u>SH18B105K160CT</u>	<u>SH21B473K500CT</u>
<u>SH31B102K500CT</u>	<u>SH31B104K101CT</u>	<u>SH31B104K500CT</u>	<u>SH31B105K500CT</u>	<u>SH31B224K500CT</u>
<u>SH21B221K500CT</u>	<u>SH21B222K101CT</u>	<u>SH21B222K500CT</u>	<u>SH21B224K250CT</u>	<u>SH21B224K500CT</u>
<u>SH21B473K101CT</u>	<u>SH21B103K101CT</u>	<u>SH21B103K500CT</u>	<u>SH21B104K101CT</u>	<u>SH21B104K160CT</u>
<u>SH21B104K500CT</u>	<u>SH21B152K101CT</u>	<u>SH18B221K500CT</u>	<u>SH18B223K500CT</u>	<u>SH18B224K160CT</u>
<u>SH18B333K500CT</u>	<u>SH18B473K500CT</u>	<u>SH21B102K500CT</u>	<u>SH21B103K201CT</u>	<u>SH31B102K202CT</u>
<u>SH31B103K102CT</u>	<u>SH43B474K251CT</u>	<u>SH31N102K631CT</u>	<u>SH32B225K101CT</u>	<u>SH32B104K501CT</u>
<u>SH18B334K250CT</u>	<u>SH18B471K500CT</u>	<u>SH21B105K160CT</u>	<u>SH31B103K501CT</u>	<u>SH31B103K631CT</u>
<u>SH18B104K160CT</u>	<u>SH18B102K250CT</u>	<u>SH15B104K160CT</u>	<u>SH31N102J251CT</u>	<u>SH31B104K201CT</u>
<u>SH31B105K160CT</u>	<u>SH32B104K101CT</u>	<u>SH32B105K101CT</u>	<u>SH32B224K251CT</u>	<u>SH18B224K100CT</u>
<u>SH31B473K101CT</u>	<u>SH31N472J251CT</u>	<u>SH21B102K101CT</u>	<u>SH21B102K160CT</u>	<u>SH21B102K201CT</u>
<u>SH21B102K250CT</u>	<u>SH21B102K251CT</u>	<u>SH21B102K631CT</u>	<u>SH21B103K100CT</u>	<u>SH21B103K160CT</u>
<u>SH21B103K250CT</u>	<u>SH21B103K251CT</u>	<u>SH21B104K100CT</u>	<u>SH21B104K250CT</u>	<u>SH21B122K631CT</u>
<u>SH21B151K100CT</u>	<u>SH21B151K101CT</u>	<u>SH21B151K160CT</u>	<u>SH21B151K250CT</u>	<u>SH21B151K500CT</u>
<u>SH21B152K100CT</u>	<u>SH21B152K160CT</u>	<u>SH21B152K250CT</u>	<u>SH21B152K251CT</u>	<u>SH21B152K500CT</u>
<u>SH21B153K100CT</u>	<u>SH21B153K101CT</u>	<u>SH21B153K160CT</u>	<u>SH21B153K250CT</u>	<u>SH21B153K500CT</u>
<u>SH21B154K100CT</u>	<u>SH21B154K160CT</u>	<u>SH21B154K250CT</u>	<u>SH21B154K500CT</u>	<u>SH21B221K100CT</u>
<u>SH21B221K101CT</u>	<u>SH21B221K160CT</u>	<u>SH21B221K201CT</u>	<u>SH21B221K250CT</u>	<u>SH21B221K251CT</u>